




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

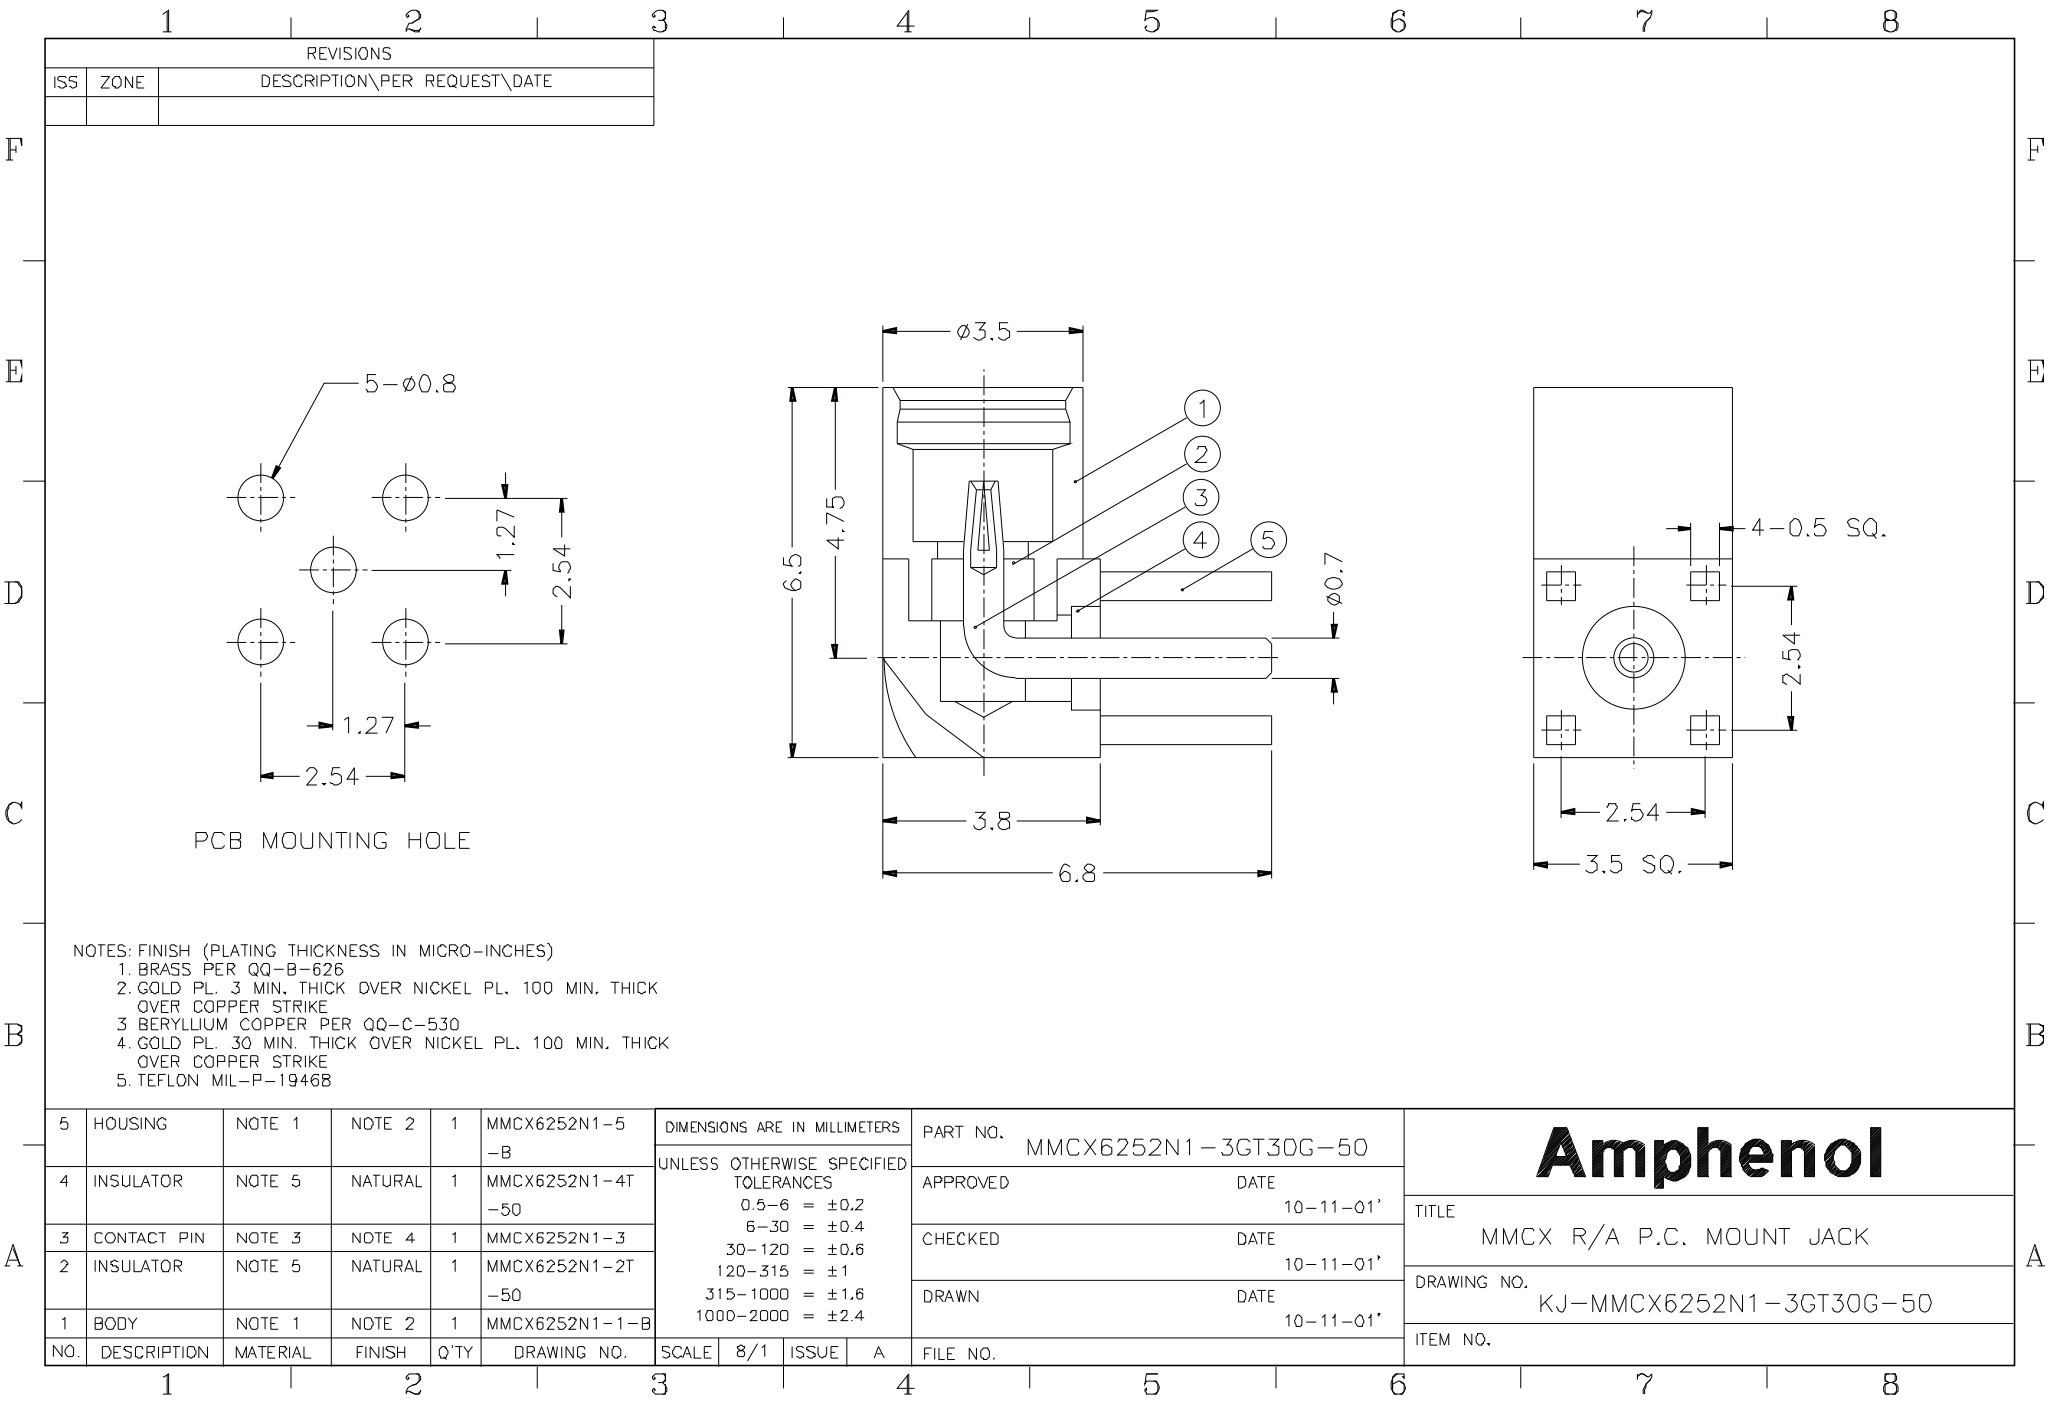

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS PER QQ-B-626
- 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- 3. BERYLLIUM COPPER PER QQ-C-530
- 4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
- 5. TEFLON MIL-P-1946B

5	HOUSING	NOTE 1	NOTE 2	1	MMCX6252N1-5-B	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO. MMCX6252N1-3GT30G-50				Amphenol			
4	INSULATOR	NOTE 5	NATURAL	1	MMCX6252N1-4T-50					APPROVED DATE 10-11-01'							
3	CONTACT PIN	NOTE 3	NOTE 4	1	MMCX6252N1-3					CHECKED DATE 10-11-01'							
2	INSULATOR	NOTE 5	NATURAL	1	MMCX6252N1-2T-50					DRAWN DATE 10-11-01'							
1	BODY	NOTE 1	NOTE 2	1	MMCX6252N1-1-B					FILE NO.							
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	8/1	ISSUE	A					TITLE MMCX R/A P.C. MOUNT JACK			
										DRAWING NO. KJ-MMCX6252N1-3GT30G-50							
										ITEM NO.							