



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN200517	

Material and Plating:

Housing: PBT, UL94V-0, Beige.

Contacts: Brass.

Lock: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin or
Gold Flash Plated on solder tail over 50u" Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: $10^6 M\Omega$ min. at DC 500V.

Contact Resistance: $20m\Omega$ max. at DC 100mA.

Operating Temperature: $-55^{\circ}C \sim +125^{\circ}C$.

***RoHS Compliant**

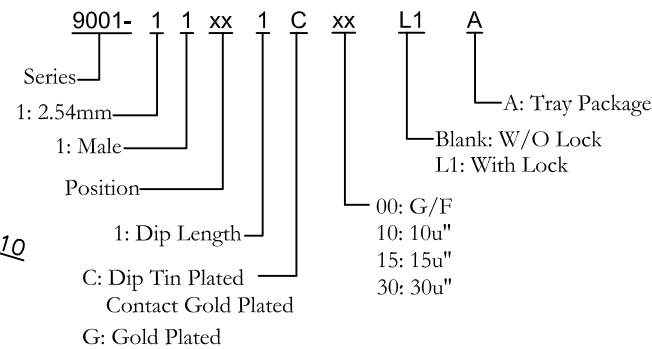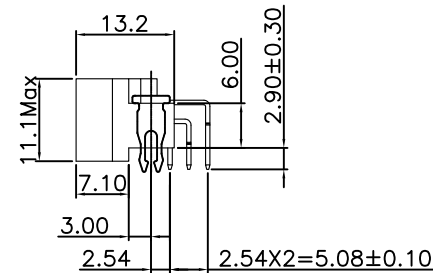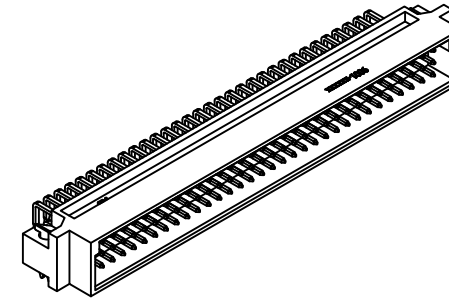

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	96	a b c		9001-11961C~
	64	a - c		9001-11641C~
	32	a - -		9001-11321C~

Tolerances	Dwg. No.	9001D11001
x = ± 0.5	Projection	
.x = ± 0.25	Unit	mm
.xx = ± 0.15	Scale	1:1
	Drawn By	WQ 09/23'20

Title: 9001 Series
DIN41612
C Type Male

 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-11xx1CxxL1A			
SHEET	1/1	Ver. No.	R7

