



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'		LJC 09/25/06'
B	PLATING CHANGE	JLZ 07/07/15'	HZW 07/07/15'	LJC 07/07/15'
C	DRAWING UPDATE	JLZ 03/20/17'	HZW 03/20/17'	LJC 03/20/17'
D	DRAWING UPDATE	JLZ 08/24/18'		

NOTES:

1. Material
 - 1.1 Insulator:Thermoplastic(UL 94V-0).
 - 1.2 Contact:Copper alloy.
2. Specification
 - 2.1 Storage temperature:-40°C~+105°C.
 - 2.2 Contact resistance:20mΩ max.(initial).
 - 2.3 Insulation resistance:1000MΩ min.
 - 2.4 Dielectric withstanding voltage:AC 500V
per minute.

3. Part number: DS1012

4. Product number code:

DS1012- X X X X X X X

— Lock DIM.H
8: 8.00mm (standard)
4: 4.60mm (special)

- Housing color
 - A: Gray
 - B: Black


- Contact plating
2: Gold + Nickel

- Strain relief
N: W/O

— Screw hole
M: W/
N: W/O

- Ejector type
L: Long

— No. of contacts
10 14 16 20 24 26
30 40 50 60 64

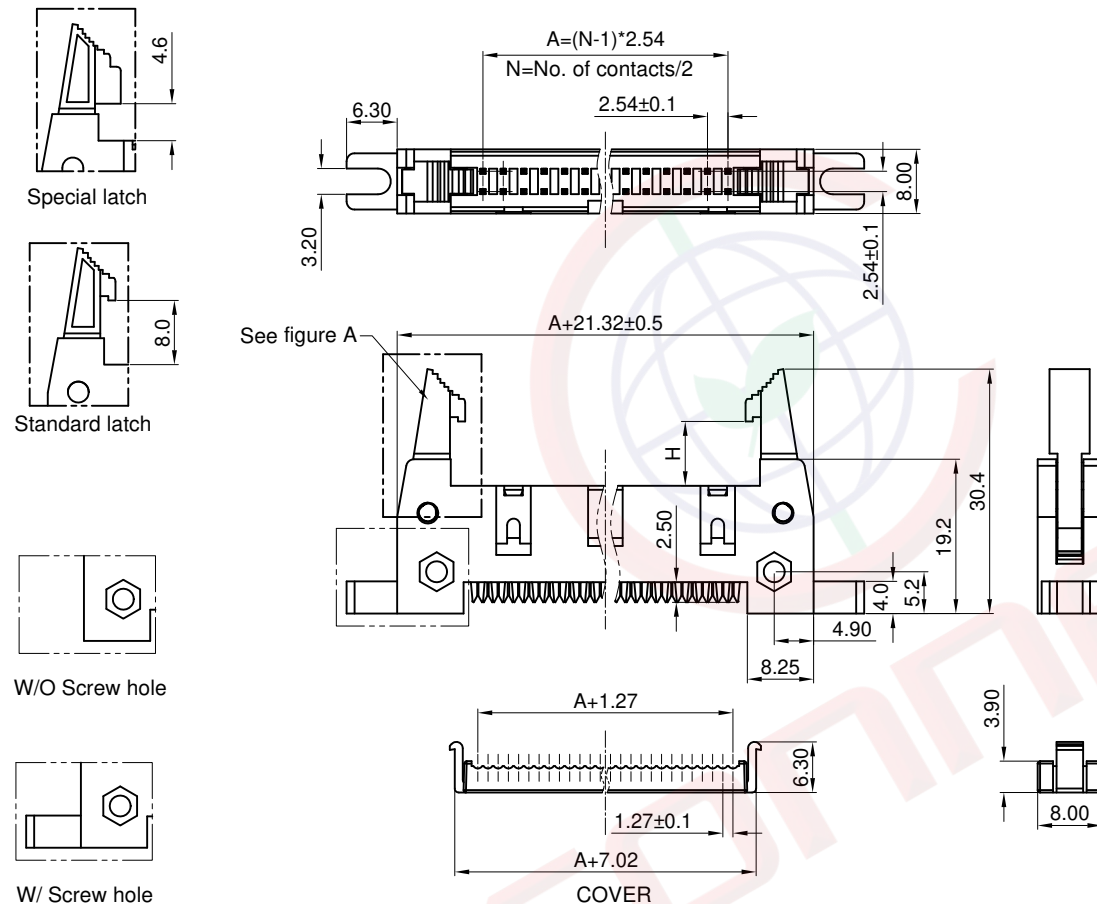

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SHROUDED HEADER	
X. ±0.60		X. ±5°		UNITS	mm	MATES WITH PITCH 1.27mm FLAT CABLE		
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	DS1012 SERIES	
.XX ±0.25		.XX ±2°		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE	CUSTOMER							
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1012-XXXXXXX-D							

晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD

The information provided herein is from CONNELY Electronics Co., Ltd. and is confidential to a party other than the recipient. The intellectual properties and its rights contained herein, including but not limited to, trademarks, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNELY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.