




EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

R13-507

Screw Type

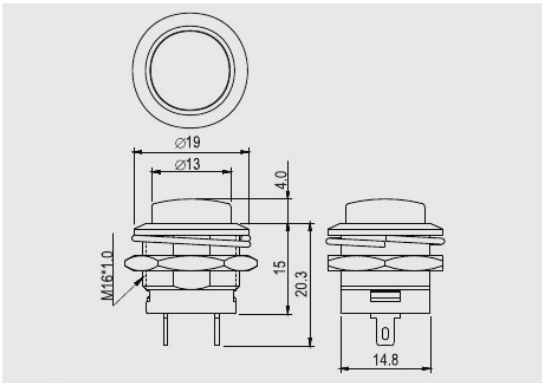

Rating
6A 125V AC 3A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1000V 1 minute
Cut-out



FEATURES

- * MATERIAL: Frame is nylon glass fiber(UL flame: 94HB), bezel is PBT. Terminals are silver plated brass.
- * M type are metal frame, nickel plated brass.
- * Mounted by nut.

R13-507

BODY		FUNCTION	TERMINAL
Plastic Body	Metal Body		SO

* () =momentary