




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

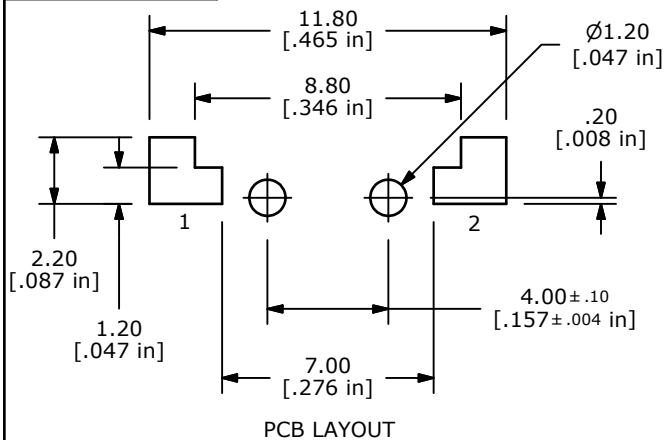

O.P. (MM)	P.T. (MM)
3.3 ± 0.3	0.2 ± 0.1




O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



CIRCUIT: SPST

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- RATING: 0.1A @125VAC or 48VDC
- CONTACT RESISTANCE: 300m OHMS MAX.
- MECHANICAL LIFE: 3,000,000 CYCLES
- ELECTRIC LIFE: 3,000,000 MAKE-AND-BREAK CYCLES
- INSULATION RESISTANCE: 100 MEGA-OHM MIN @ 500VDC.
- DIELECTRIC STRENGTH: 1,000 V FOR 1 MIN.
- OPERATING TEMP.: -25°C to 85°C
- ▲ OPERATING FORCE: 70±20gf
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT
- PACKAGING: TAPE & REEL, 1200 PIECES PER REEL.

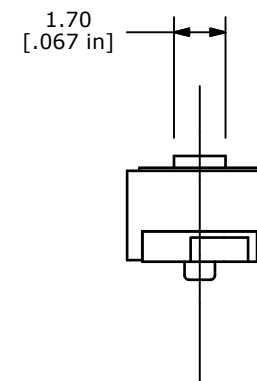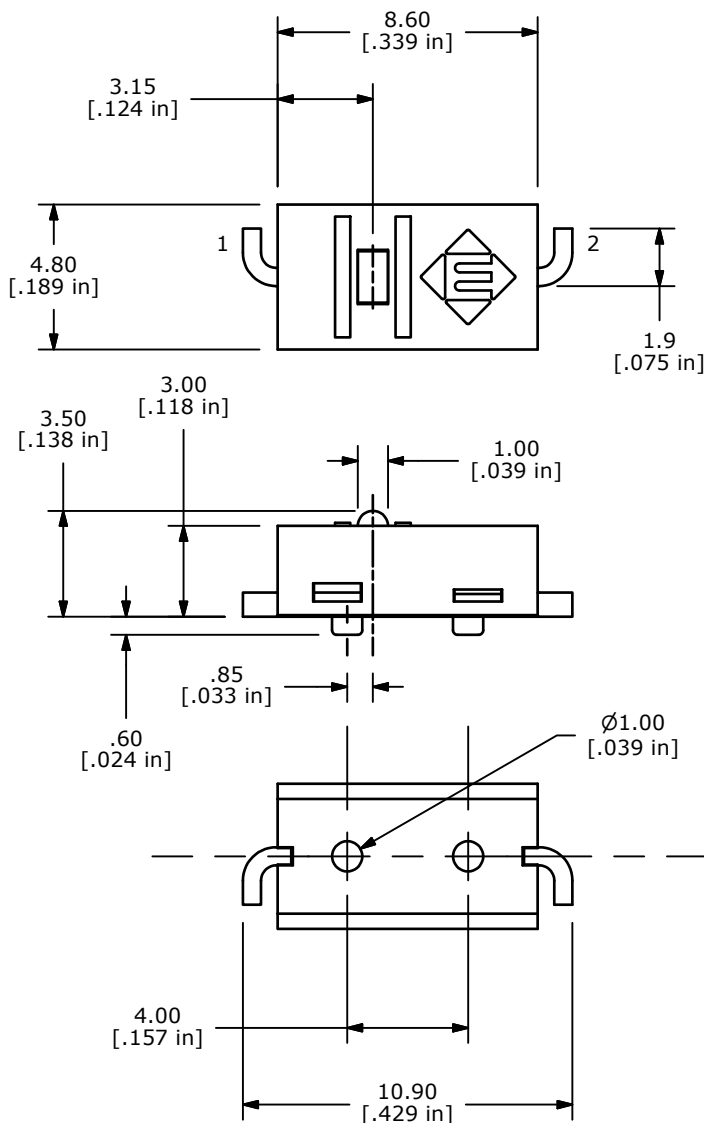

TITLE TS20100F070S

SCALE 4 : 1

DATE 11/24/2008

DR rc

DWG Q930000

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED