



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

NBSL, NBSLM, NBESL, BSL, BSLM, BESL, PAL, PALM series



BSL 01

3

② Thread connection

M5: M5X0.8
01: PT1/8
02: PT1/4
03: PT3/8
04: PT1/2

Product series	Thread connection				
	M5	PT1/8	PT1/4	PT3/8	PT1/2
BSL/BSLM	●	●	●	●	●
BESL/PAL		●	●	●	●
PALM		●	●		

[illegible]

Accessories——Silencers

NBSL, NBSLM, NBESL, BSL, BSLM, BESL, PAL, PALM series

Product feature

NBSL, NBSLM, NBESL, BSL, BSLM, BESL Series:


1. This silencers have excellent noise silencing performance.
2. The installation of the silencer is simple and convenient, and the connecting portion is reliable and durable.
3. It is easy to adjust the exhaust flow of the throttling type silencer.

PAL Series, PALM Series:


1. The silencer body is made of plastic.
2. The mini type silencer has the characteristics of small volume and compact structure.

Inner structure

NBSL, BSL Series




NBESL, BESL Series




NO.	Name	NO.	Name
1	Adjusting cap	4	Locking ring
2	Throttling column	5	Silencer ring
3	Locking cap	6	Silencer body

PAL Series




Flowrate characteristic


NBSL Series

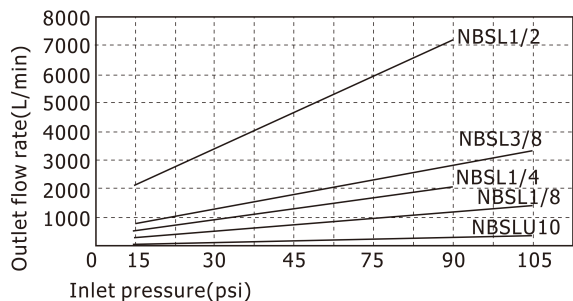


NBSLM Series

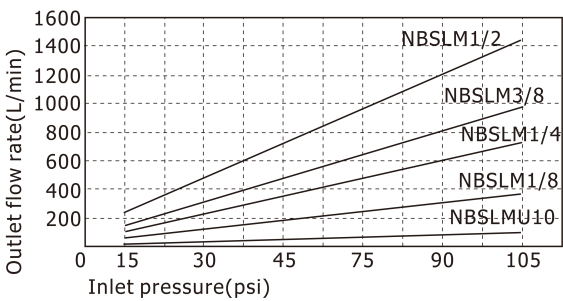

NBESL Series

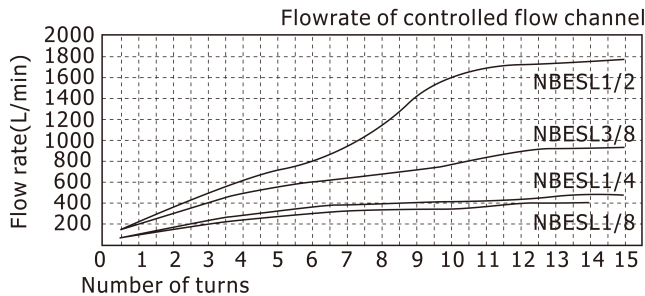

NBESL Series (Inlet pressure and outlet flow rate)

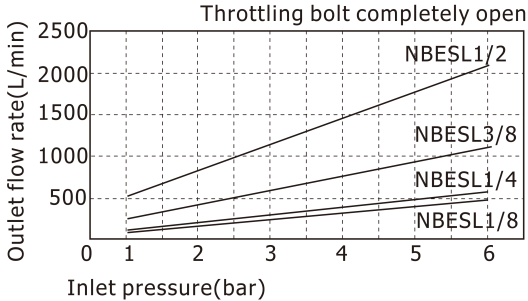


Accessories——Silencers


NBSL, NBSLM, NBESL, BSL, BSLM, BESL, PAL, PALM series

Flowrate characteristic


BSL Series

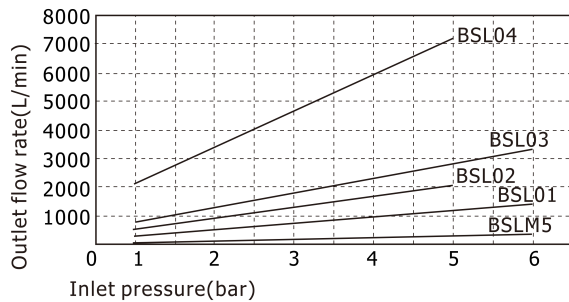


BSLM Series

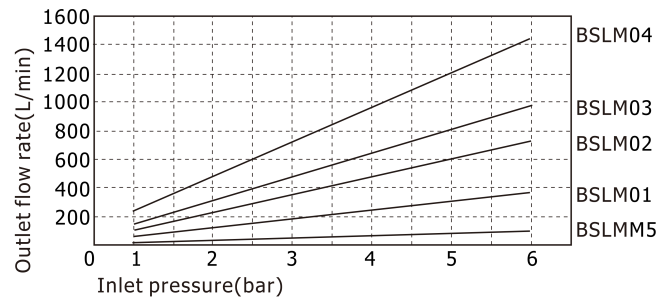


PAL, PALM Series

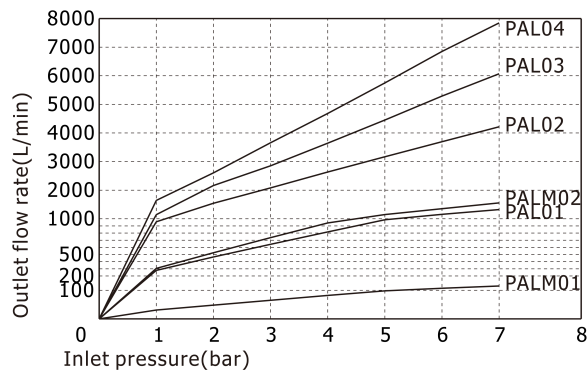

BESL Series (Inlet pressure and outlet flow rate)

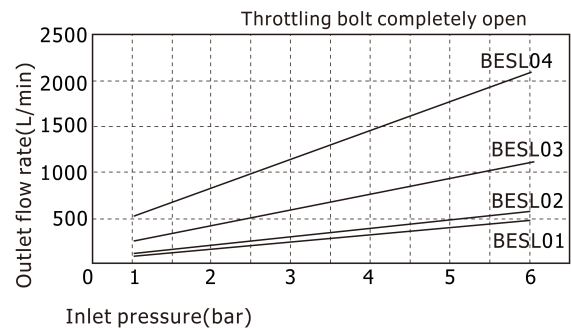


BESL Series

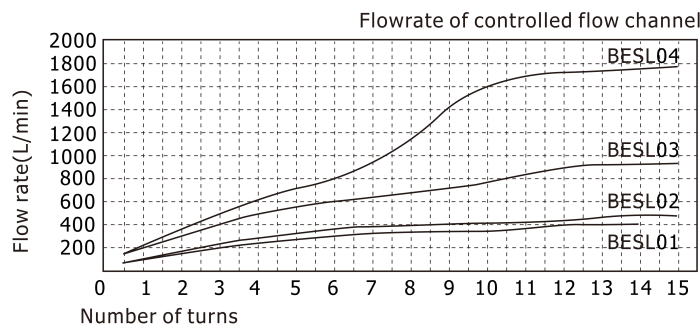

Dimensions

PAL, PALM Series

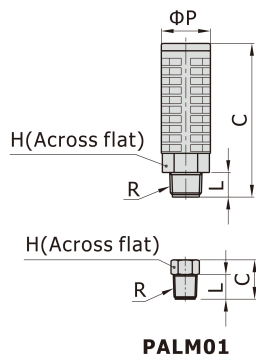

[Unit: mm]


Model\Item	R	ΦP	L	C	H	Weight(g)
PAL01	PT1/8	16	7	33	14	4.2
PALM01	PT1/8	/	10	16	10	0.9
PAL02	PT1/4	20	10	62.5	17	10.7
PALM02	PT1/4	16	10	36	14	5.1
PAL03	PT3/8	26	12	68	24	20
PAL04	PT1/2	28	12	73	24	23.1

Accessories——Silencers

NBSL, NBSLM, NBESL, BSL, BSLM, BESL, PAL, PALM series

NBSL Series


[Unit: inch]



Model\Item	R	L	C	H	Weight(g)
NBSLU10	#10-32 UNF	0.14	0.77	5/16	2.9
NBSL1/8	NPT1/8	0.24	0.94	1/2	7.1
NBSL1/4	NPT1/4	0.31	1.18	5/8	12.4
NBSL3/8	NPT3/8	0.35	1.52	3/4	22.0
NBSL1/2	NPT1/2	0.41	1.87	7/8	35.3

BSL Series


[Unit: mm]



Model\Item	R	L	C	H	Weight(g)
BSLM5	M5×0.8	3.5	19.5	8	2.9
BSL01	PT1/8	6	24	12	6.7
BSL02	PT1/4	8	30	15	11.6
BSL03	PT3/8	9	38.5	19	22
BSL04	PT1/2	10.5	46	22	35

NBSLM Series


[Unit: inch]



Model\Item	R	L	C	H	Weight(g)
NBSLMU10	#10-32 UNF	0.14	0.37	5/16	2.3
NBSLM1/8	NPT1/8	0.24	0.43	7/16	4.3
NBSLM1/4	NPT1/4	0.31	0.53	5/8	9.2
NBSLM3/8	NPT3/8	0.35	0.61	3/4	15.8
NBSLM1/2	NPT1/2	0.41	0.81	7/8	26.3

BSLM Series


[Unit: mm]



Model\Item	R	L	C	H	Weight(g)
BSLMM5	M5×0.8	3.5	9.5	8	2.3
BSLM01	PT1/8	6	11	11	4.3
BSLM02	PT1/4	8	13.5	15	8.4
BSLM03	PT3/8	9	15.5	19	15.8
BSLM04	PT1/2	10.5	19	22	25.9

NBESL Series


[Unit: inch]

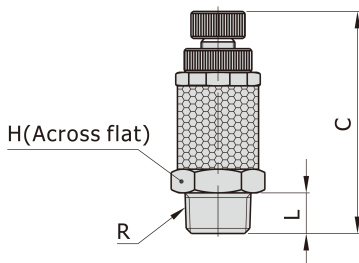

Model\Item	R	L	C	H	Weight(g)
NBESL1/8	NPT1/8	0.24	0.94	1/2	10.4
NBESL1/4	NPT1/4	0.31	1.18	9/16	18.4
NBESL3/8	NPT3/8	0.35	1.52	11/16	31.7
NBESL1/2	NPT1/2	0.41	1.81	15/16	69.4

BESL Series

[Unit: mm]



Model\Item	R	L	C		H	Weight(g)
			max	min		
BESL01	PT1/8	6	40.5	33	12	10
BESL02	PT1/4	8	42.5	35	14	18.1
BESL03	PT3/8	9	49	41.5	17	31.1
BESL04	PT1/2	10.5	59.5	52	24	69.8