



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).


■Introduction:

OSWPTS1208D using CMOS process, it has the characteristics of higher accuracy and good stability IC for wireless induction intelligent charging, the power Management System. the use of Electromagnetic energy. Transformation principle and cooperate with Receiving part of energy conversion for the rapid charging of the LED.


■Features:

- Efficient electromagnetic energy conversion.
- DC working voltage: DC5~9V
- Working frequency: 60KHZ
- High speed transmission power to drive wireless LED.

■Outline Dimension

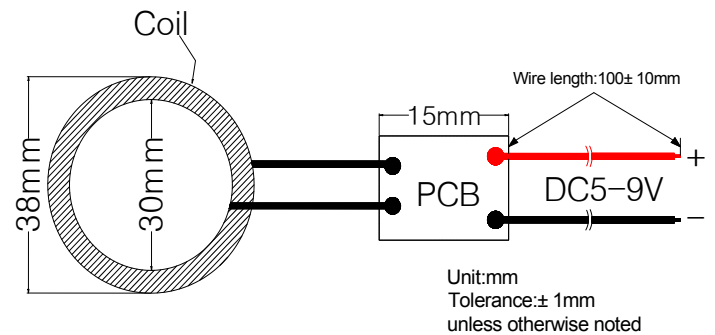

■Photo

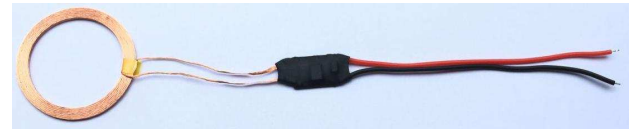

■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
Maximum working voltage	V <sub>F</sub>	9	V
The output drive current	I <sub>F</sub>	800	mA
Operating Temperature	T <sub>opr</sub>	-30 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40~ +100	°C

■Typical working(Ta=25°C)

Items	Parameter	Symbol	Min.	Typ.	Max.	Units
Working voltage		VDD	5	-	9	V
Output current	VDD=9V	AOUT	-	500	-	mA
No-load current	VDD=9V	I		120		mA
Induction distance	VDD=9V	M	-	10	-	mm

LED & Application Technologies

