



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV	Description	DATE	BY
v2.0	1.Change DB9 to standard interface 2.INT can link to D2 or D3 3.Add a TF card interface 4.Change D0/D1 of Grove Serial to A0/A1 5.Change A4/A5 of Grove I2C to SDA/SCL 6.Change DIP Grove interface to SMD interface 7.Increase ESD Protection	2017.05.26	

Seed Studio

TITLE: CAN-BUS Shield v2.0

CC-BY-SA

Design: weifeng.zeng


Check:

Date: 2017/6/27 16:22:21


Vision: v2.0

Sheet: 1/2


SHIELD CONNECT

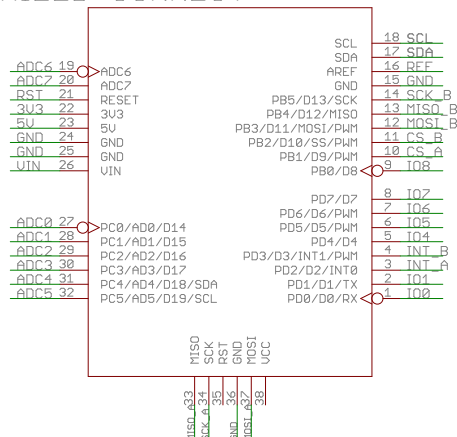


INTERFACE

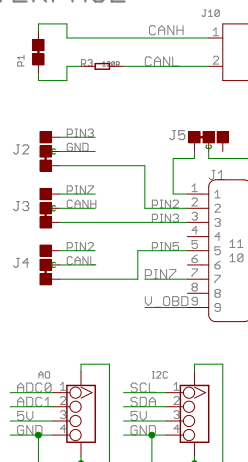


POWER




TF_CARD

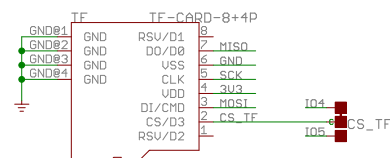

CAN_SPI

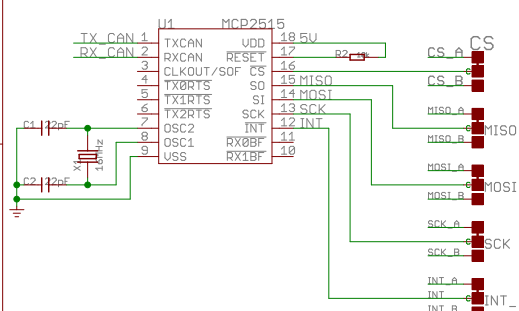

LED



Seed Studio

TITLE: CAN-BUS Shield v2.0

CC-BY-SA

Design: weifeng.zeng

Check: v2.0

Date: 2017/6/27 16:22:21

Vision:

Sheet: 1/2