EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

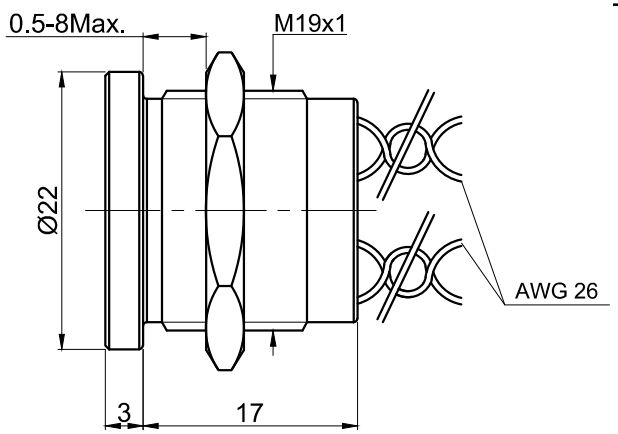

The shaded part is illuminated

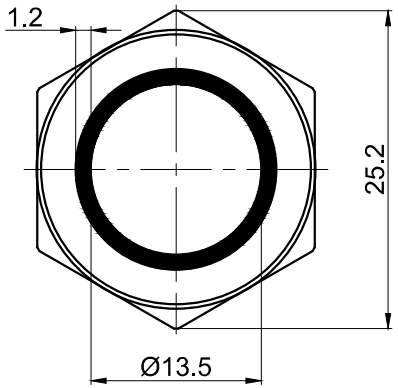

Part Number:PS193P10Y◆1△▲

"◆"	Colour/Materials
NT	Natural anodized (Al alloy)
BU	Blue anodized (Al alloy)
BK	Black anodized (Al alloy)
GD	Gold anodized (Al alloy)
RD	Red anodized (Al alloy)
SS	Stainless steel
GN	Green anodized (Al alloy)

"△"	Lamp Color
R	Red
G	Green
Y	Yellow
B	Blue
W	White

"▲"	LED Volvate
05T	DC 5V
12T	DC 12V
24T	DC 24V



PANEL CUTOUT
MAX.PANEL THICKNESS
8 mm



Seal Ring

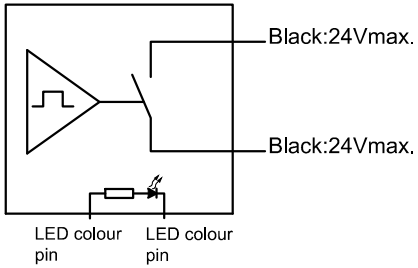

Wiring Diagram

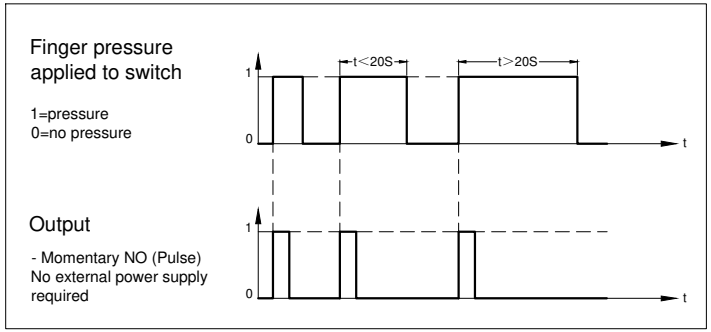

SPECIFICATIONS:

1.Switch Operation: Momentary NO (Pulse).
2.Max.Switch Rating: 200mA 24VAC/DC.
3.Operation Life: 50 Million cycles.
4.Wiring: Length 300mm.
5.IP Class: IP68.
6.Operating Temperature: -40℃～ +75℃.
7.Operating Force: About 5～10N.

MATERIALS:

1.Body:Al Alloy/Stainless steel .

BRAND 品牌 ONPOW

红波按钮制造有限公司
ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.

DIMENSIONS	TOLERANCE
0.00 TO 18.00mm	±0.43mm
18.01 TO 30.00mm	±0.52mm
30.01 TO 50.00mm	±0.62mm
50.01 TO 80.00mm	±0.74mm

USED 用途		APPD 审核	CH 2020/05/11
FINISH 处理		CHKD 校对	NCH 2020/05/11
SCALE 比例	1. 7 / 1	UNIT 单位	mm
		DR. 制图	ZPD 2020/05/11
TITLE 名称	Piezo electric Switch		
DWG NO. 图号	PS193P10Y 自复T带灯	SIZE 图纸	A4
FILE NAME 档案名称	PS193.DWG	SHEET 张	1 / 1
		REV. 更改	1