



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



First Rewireable Cord Connector with V-Lock
Cord Retention

4783

Rewireable Cord Connector
IEC 60320 C13

- > First Rewireable V-Lock Cord Connector
- > Black, Grey or White
- > Ideal for low volume builds
- > Ergonomic and modern design
- > Halogen free



SCHURTER presents the 1st rewireable V-Lock World Wide – Type 4783

- > Why rewireable cord connectors?
 - > Small Series builds
 - > Flexible cable lengths and country specific plugs
 - > **Reusable**
- > Why cord/plug retention?
 - > **Prevent unintentional removal of power**
 - > Medical technology
 - > Data and Information technology
- > Why V-Lock retention?
 - > **Proven**
 - > Professional
 - > Secure



SCHURTER is worldwide the first company that can deliver a product of this combination!

... and welcomes the New 4783 in the large portfolio of rewirable connectors here at **SCHURTER**



SCHURTER presents the 1st rewireable V-Lock World Wide – Type 4783



- > Locking **compatibility** with all SCHURTER V-Lock receiving C14 inlets [35+ Products and growing]
- > **Colors** available in Black, Grey and White
- > Factory mounted cable guard included for **8.5 mm or 10 mm cable Ø**
- > Screw terminals for wire cross sections min. 3 x **0.75 mm²/18AWG (0.82mm²)** to max. 3 x **1.5 mm²/14AWG (2.08mm²)**
- > Rated current
250 VAC 10 A (IEC and CCC) and
125 VAC 15 A (UL and CSA)
- > European, USA and Chinese Approvals

Order Information – Type 4783: 1st Rewireable V-Lock World Wide




Color	Cable Guard Ø	Part Number	MOQ
Black	8.5 mm	3-122-073	50 pcs
Black	10 mm	3-122-074	50 pcs

Color	Cable Guard Ø	Part Number	MOQ
Grey	8.5 mm	3-122-075	50 pcs
Grey	10 mm	3-122-076	50 pcs

Color	Cable Guard Ø	Part Number	MOQ
White	8.5 mm	3-122-077	50 pcs
White	10 mm	3-122-078	50 pcs

Dimensions – Type 4783: 1st Rewireable V-Lock World Wide

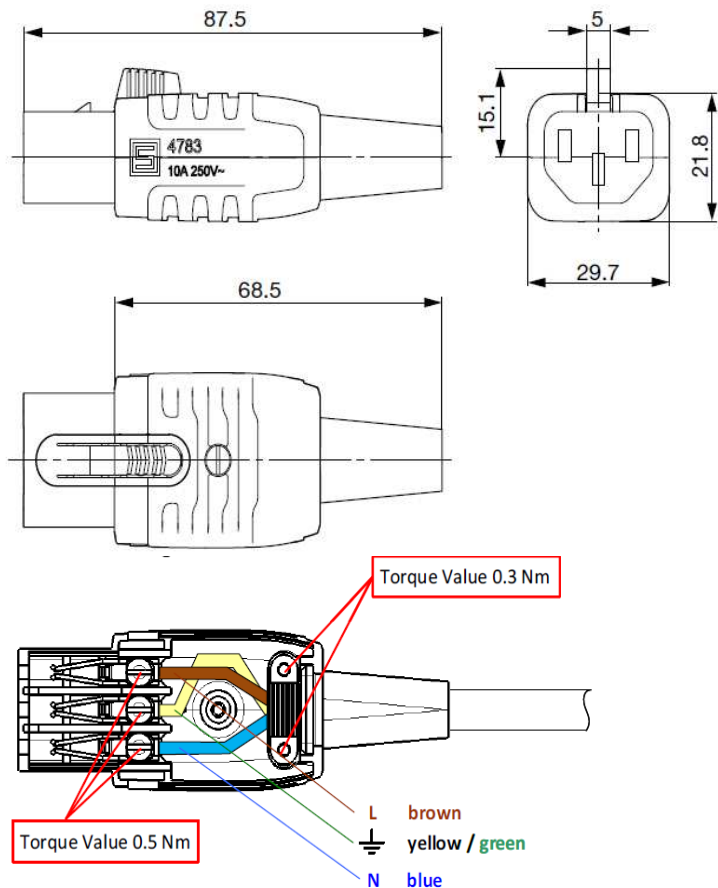

	IEC	UL
Cable Type	H05W-F	SVT, SJT
Cable Diameter min	Ø 7.6 mm	Ø 7.7 mm
Cable Diameter max	Ø 9.4 mm	Ø 9.5 mm
Wire Size min	3x0.75mm ²	3xAWG18 (0.82mm ²)
Wire Size max	3x1.50mm ²	3xAWG14 (2.08mm ²)

Additional Information

- > 4783 data sheet [\[- Link -\]](#)
- > 4783 compatible SCHURTER Products [\[- Link -\]](#)
- > Landing Page V-Lock [\[- Link -\]](#)
- > White Paper Cord Retention [\[- Link -\]](#)
- > **SCHURTER** Rewireable Connector Portfolio [\[- Link -\]](#)

- > Click on [Partner Services](#) to download:
 - > Latest press releases
 - > Training presentations
 - > Price list

- > For further questions please contact [your local SCHURTER sales contact](#)