



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 12/08/11	~	

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 30mΩ Max
- . Operating Temperature: -40°C to +105°C

2. MATERIALS


- . Contact Material: Copper alloy
- . Insulator: Thermoplastic(UL94 V-0)

3. PART NUMBER: DS1065-07


4. PRODUCT NUMBER CODE:

DS1065-07 - X X X X X

- MOUNTING TYPE
V: VERTICAL TYPE
- HOUSING COLOR
B: BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
S: SOCKET
- No. OF CONTACTS
1*1-1*40

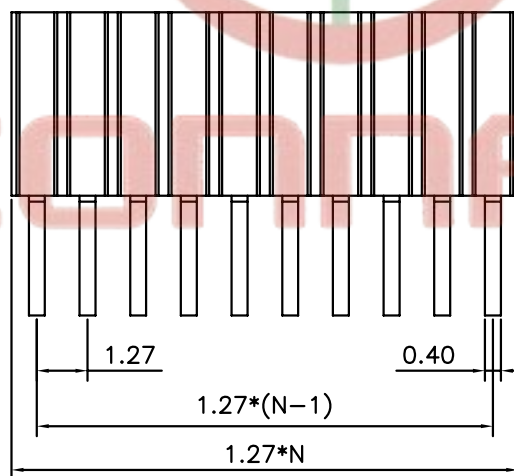

N=No. of Contacts

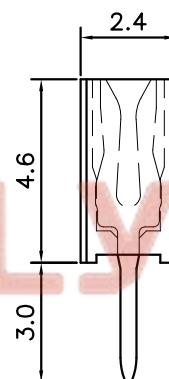

Tel:86-574-
Fax:86-574-
E-mail:sale
Http://www

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	FEMALE HEADER PITCH 1.27mm TYPE SINGLE ROW STRAIGHT	
X.	±0.60	X.	±5°		mm			
.X	±0.38	.X	±3°					
.XX	±0.25	.XX	±2°					
DRAWING TYPE	CUSTOMER			SHEET SIZE	A4	SERIES	DS1065-07	
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1065-07-XXXXX							



晨翔电子有限公司

CONNFLY CONNFLY ELECTRONIC CO. LTD