




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

SRD Series SUBMINATURE HIGH POWER RELAY 7A/10A/15A



CQC08002027667




Features

- Miniature volume, PCB usage
- Contact rating: 7A/10A/15A
- Temperature range: +85°C/+105°C

Ordering Information

SRD-12VDC-S L-C

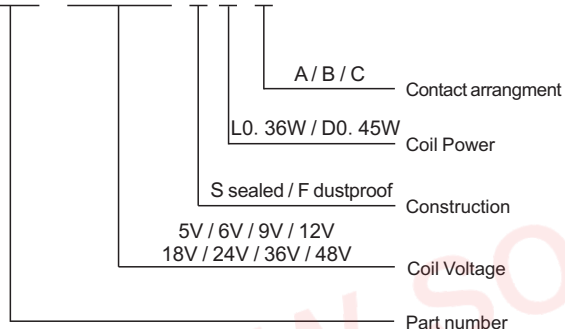

Contact Rating

Contact arrangement	1A(spsno)/1B(Spsnc)/1C(Spdt)
Contact resistance	100mΩ (1A 6VDC)
Contact material	Silver alloy: AgCdO、AgSnO ₂ 、AgNi
Contact rating	7A/250VAC 10A/250VAC 15A/250VAC
Max switching voltage	250VAC
Max switching current	15A
Max switching power	3750VA
Electrical endurance (frequency: 1800 ops/h)	1x10 ⁵ ops / 1x10 ⁴ ops
Mechanical endurance (frequency: 18000 ops/h)	1x10 ⁷ ops

Characteristics

Insulation system		Class B / Class F
Insulation resistance		100MΩ (500VDC)
Dielectric Strength Leakage current 1mA	Between contacts and coil	1500VAC 1 minute
	Between open contacts	1000VAC 1 minute
Operate time(Under nominal voltage)		≤10ms
Release time(Under nominal voltage)		≤10ms
Humidity		85% RH (20℃)
Ambient Temperature		-40℃~+85℃/-40℃~+105℃
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance (Double amplitude)		10Hz~55Hz 1.5mm
Weight		Approx 9g
Construction		Sealed

Remark: 1) All above data is initial value

Coil Data

(at 20°C)

Power dissipation W	Voltage VDC	Current mA	Resistance Ω ± 10%	Pick-up voltage	Drop-out voltage	Max allowable
0.36W (L)	05	71.4	70	75%Max	10%Min	130%
	06	60	100			
	09	40	225			
	12	30	400			
	18	20	900			
	24	15	1600			
	36	10	3600			
	48	7.5	6400			
0.45W (D)	05	89.3	55	75%Max	10%Min	130%
	06	75	80			
	09	50	180			
	12	37.5	320			
	18	25	720			
	24	18.7	1280			
	36	12.5	2880			
	48	10	4500			

This product specification only for your reference. we will not notify you if we do any improvement. We reserve all the right for the final explanation



Web: www.songle.com www.songlerelay.com

Add.: CW7, Zone A, Far East Industrial Park, Yuyao City, Zhejiang, China Zip Code: 315400

SRD Series SUBMINATURE HIGH POWER RELAY 7A/10A/15A

Safety Approval Ratings




 CQC08002027667
7A 250VAC 10A 250VAC

 R50056114 R50137084
7A 250VAC 10A 250VAC 15A 250VAC NO

 E167996
3A 125VAC inductive 10A 125VAC 15A 125VAC NO

OUTLINE DIMENSIONS ,WIRING DIAGRAM AND PC BOARD LAYOUT Unit:mm


Physical installation diagram

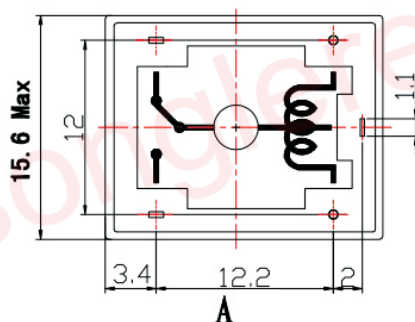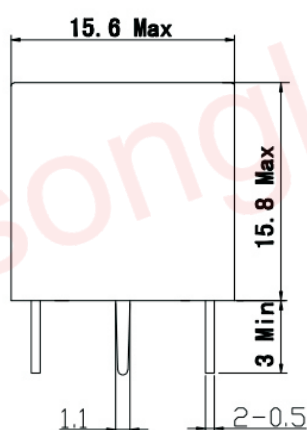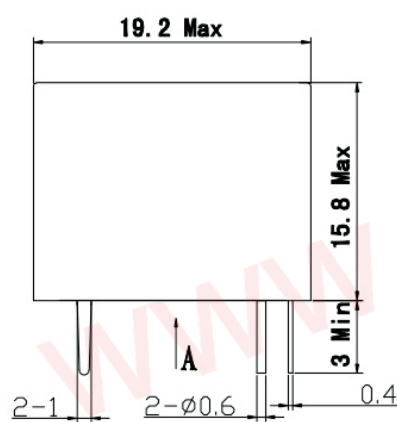


(Bottom view)

Tolerance: $\pm 0.1\text{mm}$


PCB board diagram
(bottom view diagram)



Conversion C type

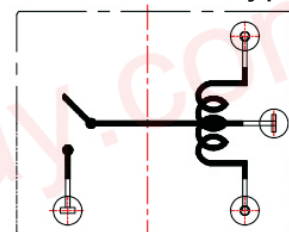

Normally open A type



Normally closed B type

This product specification only for your reference. we will not notify you if we do any improvement. We reserve all the right for the final explanation



Web: www.songle.com www.songlerelay.com

Add.: CW7, Zone A, Far East Industrial Park, Yuyao City, Zhejiang, China Zip Code: 315400