
EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

A range of professional chassis mounting sockets, designed for panel mounting via two flange fixing M3 screws. These sockets mate with all standard lockable plugs.

Materials	
Housing	Mazak
	Nickel Plated
Moulding	Lexan 500R
Contacts	Brass Silver Plated
Electrical	
Rated Voltage	34 V a.c. or d.c.
Current Rating	2.A
Test Voltage	500 V r.m.s.
Insulation Resistance	103 MΩ min at 100 V d.c
Contact Resistance	10 mΩ max
Capacitance (mated)	3pF
Climatic	
Climatic category	25/070/21
Temperature Range	-25°C to +70°C
Damp heat, steady state	21 days

Dimensions

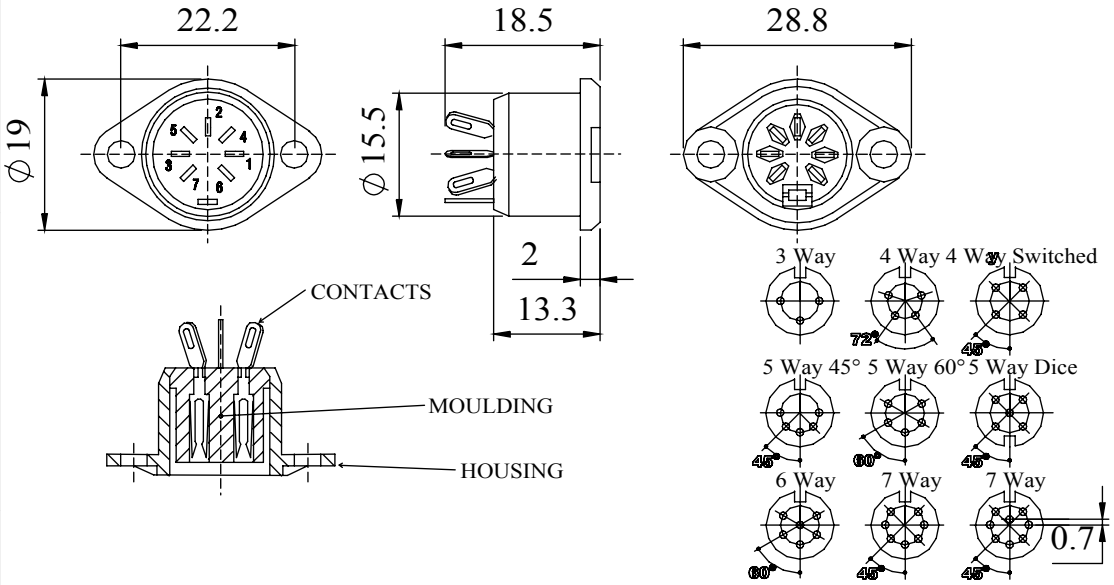



PANEL CUTOUT

Type	Deltron No
3 Way	630-0300
4 Way	630-0400
4 Way Switched	630-0410
5 Way 45°	630-0500
5 Way 60°	630-0510
5 Way Dice	630-0520
6 Way	630-0600
7 Way	630-0700
8 Way	630-0800

RoHS 2002/95/EC Compliant

Tel No. +44(0)1724 273200 Website www.dem-uk.com

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALPHA 3 MANUFACTURING.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ALPHA 3 MANUFACTURING IS PROHIBITED.

DEM Manufacturing, Deltron Emcon House
Hargreaves Way, Sawcliffe Ind. Park,
Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACES ±0.5mm
1 DECIMAL PLACE ±0.25mm
2 DECIMAL PLACES ±0.125mm
ANGULAR TOLERANCE: ±1°

FINISH: PROFESSIONAL FLANGED CHASSIS SOCKET
DEBURR AND BREAK SHARP EDGES
IF IN DOUBT ASK
DO NOT SCALE DRAWING
MATERIAL: SEE NOTE

DRAWN BY: SPB
APPROVED BY: WC
THIRD ANGLE PROJECTION
SHEET 1 OF 1
SCALE 1:1
A4

TITLE: GENERAL SPECIFICATION 630 SERIES CHASSIS SOCKET
DRAWING NO. 630 SERIES
ISSUE 09 Release