EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

97 SERIES
Sockets and accessories for 46 series relays



97.P2


Approvals
(according to type):



097.01




060.72




060.48

Push-in terminal socket panel or 35 mm rail (EN 60715) mount		**97.P1**	**97.P2**
For relay type		46.61	46.52
Accessories			
Plastic retaining and release clip (supplied with socket - packaging code SPA)		097.01	
Metal retaining clip		097.71	
Identification tag		095.00.4	
8-way jumper link		097.58	
2-way jumper link		097.52	
2-way jumper link		097.42	
Marker tag holder		097.00	
Modules (see table below)		99.02	
Timer modules (see table below)		86.30	
Sheet of marker tags for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE's thermal transfer printers		060.48	
Sheet of marker tags for marker tag holder 097.00, 72 tags, 6 x 12 mm, for plotter printing		060.72	
Technical data			
Rated values		16 A-250 V AC	8 A-250 V AC
Dielectric strength		6 kV (1.2/50 µs) between coil and contacts	
Protection category		IP 20	
Ambient temperature	°C	–40…+70 (see diagram L97)	
Wire strip length	mm	8	
Min. wire size for 97.P1 and 97.P2 socket		solid wire	stranded wire
	mm²	0.5	0.5
	AWG	21	21
Max. wire size for 97.P1 and 97.P2 socket		solid wire	stranded wire
	mm²	2 x 1.5 / 1 x 2.5	2 x 1.5 / 1 x 2.5
	AWG	2 x 18 / 1 x 14	2 x 18 / 1 x 14

L 97 - Rated current vs ambient temperature

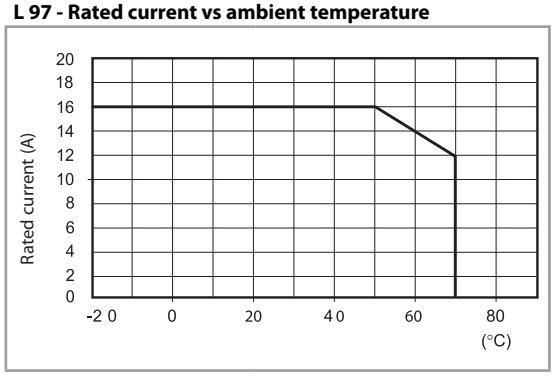


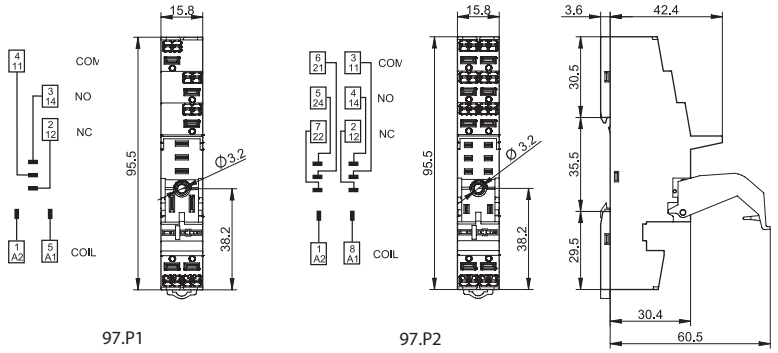



097.58


8-way jumper link for 97.P1 and 97.P2 sockets	097.58
Rated values	10 A - 250 V

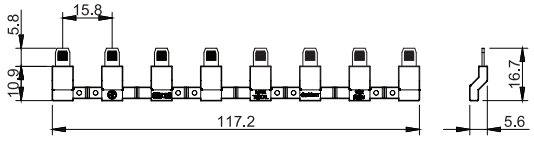



097.52

2-way jumper link for 97.P1 and 97.P2 sockets	097.52
Rated values	10 A - 250 V



II-2016, www.findernet.com