

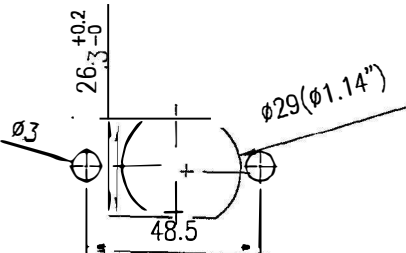

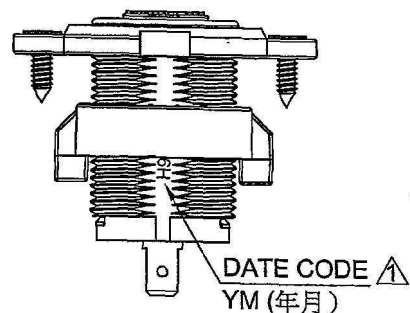
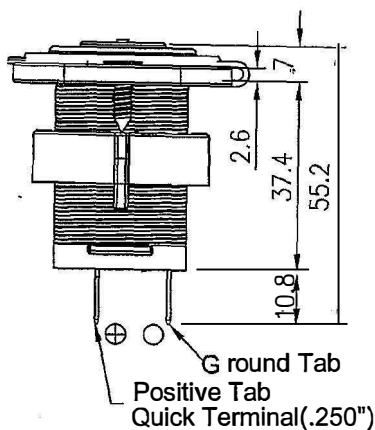





EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Rating	12V DC 20A max	Mounting Hole 
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-0° C~60° C	

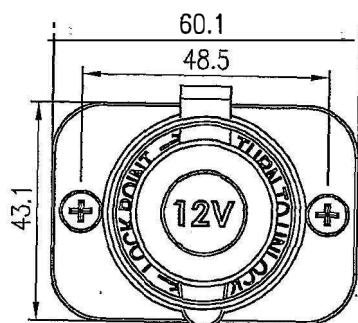

Description:

- * Water proof sealing cap
- * SeaLink® locking system
- * Easy to install using an optional mounting plate for front panel installation, or the locking ring for rear access installation
- * Compatible with standard CLA plugs



1、Tolerances ± 0.3 Unless Otherwise Specified