




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

R13-244


Double Poles Of R13-112

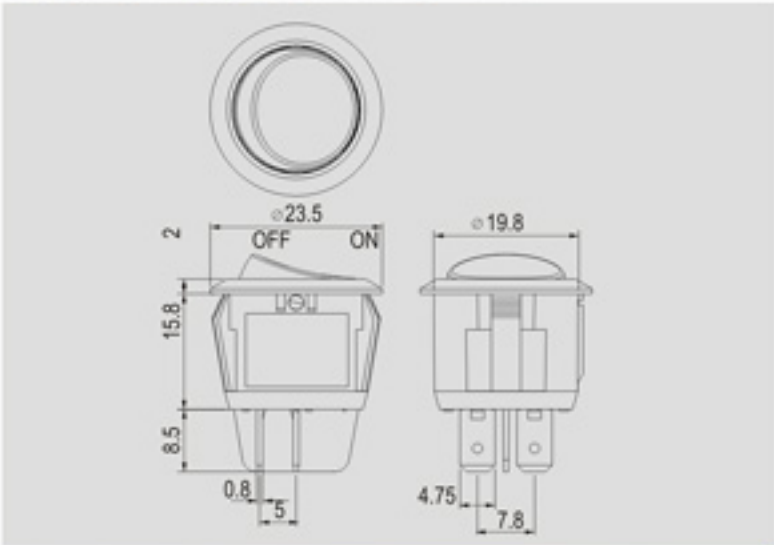

Rating
16A 125V AC/10A 250V AC 10(4)A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber and green colors.
- * Snap-in mounting, easy to install switch into panel.
- * Waterproof cover is optional.

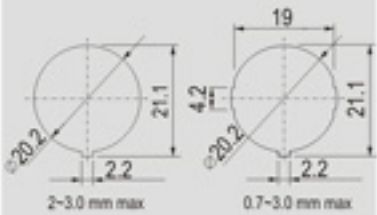

0.7~3.0 mm max

Cut-out for X8 ROCKER



0.7~2.5 mm max

Ordering number instruction

R13-244 -

FUNCTION		TERMINAL
Different position / Illuminated button (動作特性不同/帶燈)		0 2 .187" SQ
B		
C B		
D B		
Different position (動作特性不同)		
A		
C		
D		
Momentary (彈回)		
G		
H		
I		
Waterproof (防水)		
A 8		
B 8		
C 8		
C B 8		
D 8		
D B 8		

ROCKER

