




EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

R13-244


Double Poles Of R13-112

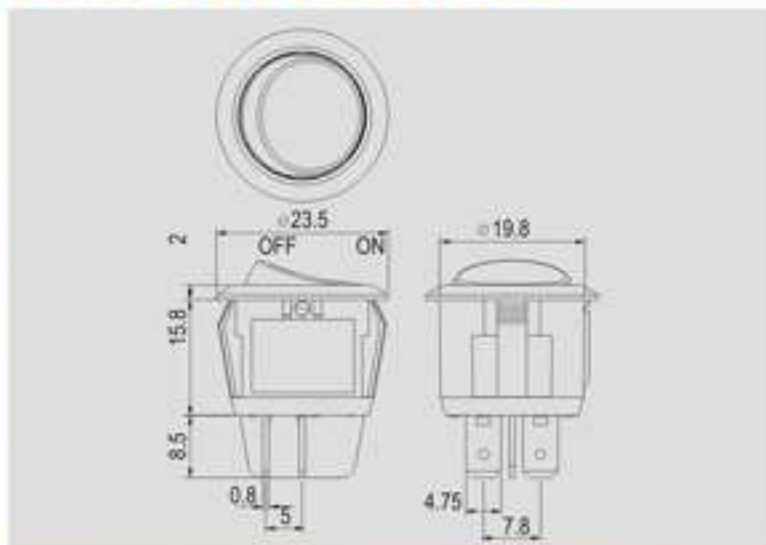

Rating
16A 125V AC/10A 250V AC 10(4)A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber and green colors.
- * Snap-in mounting, easy to install switch into panel.
- * Waterproof cover is optional.

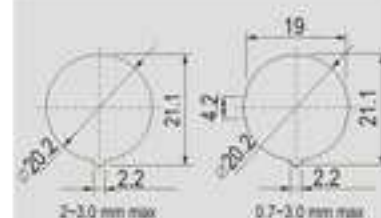

0.7~3.0 mm max

Cut-out for X8 ROCKER




0.7~2.5 mm max

Ordering number instruction

R13-244 -

FUNCTION


Different position / Illuminated button (動作特性不同/帶燈)

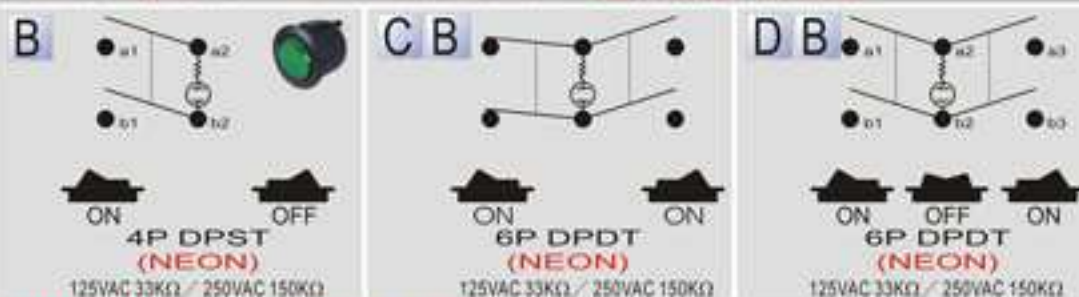


TERMINAL

0 2 .187" SQ


Different position (動作特性不同)

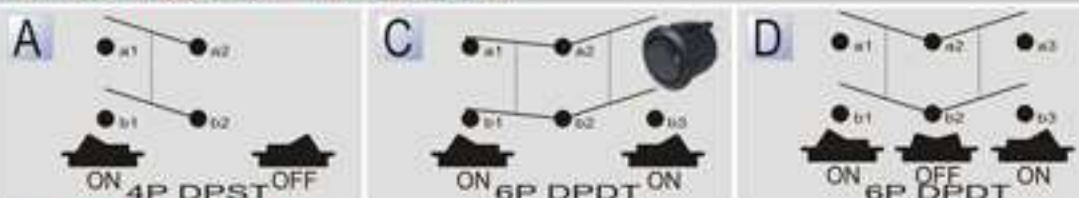

Momentary (彈回)

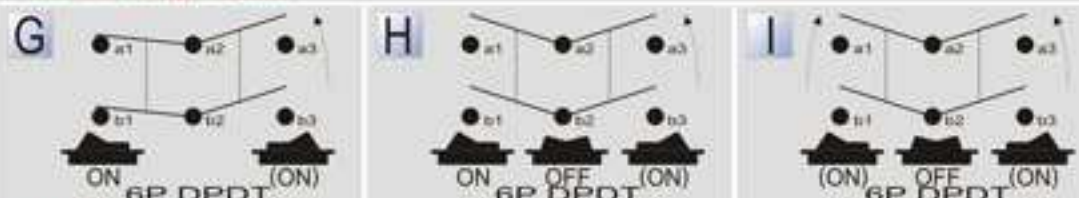

Waterproof (防水)

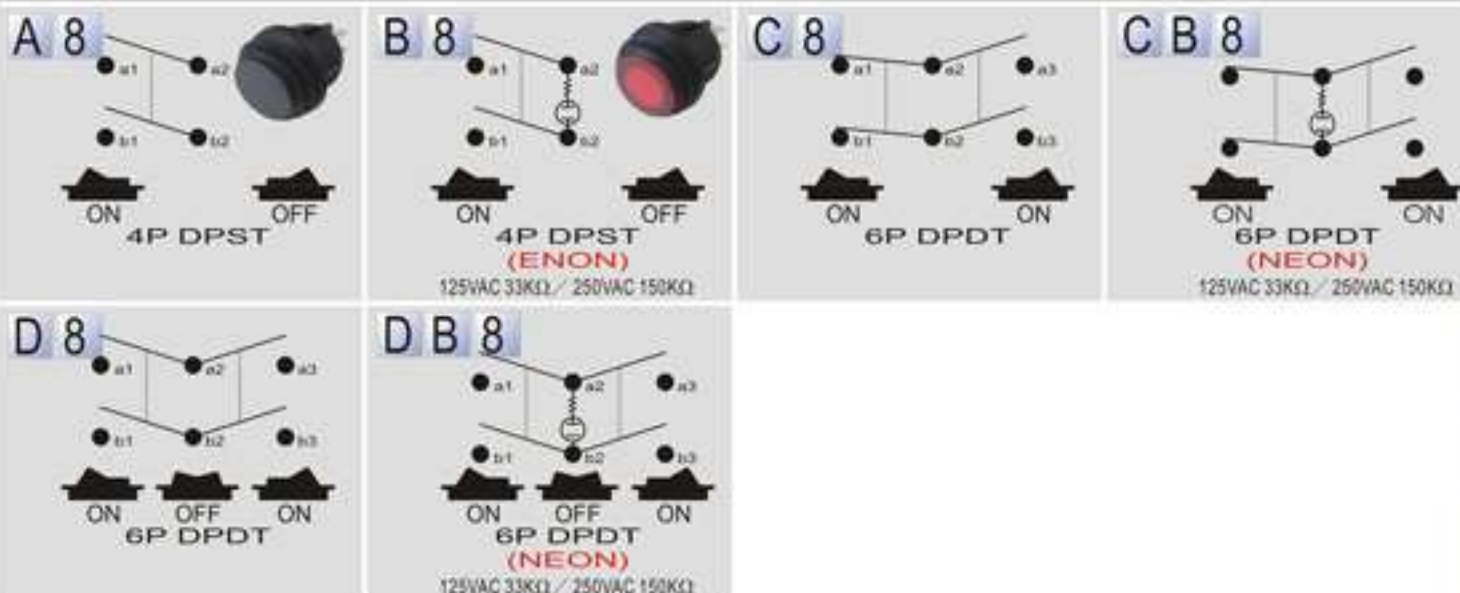

ROCKER

