




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

2M Series

Sub-Miniature Toggle Switches

2M
Toggle Switches

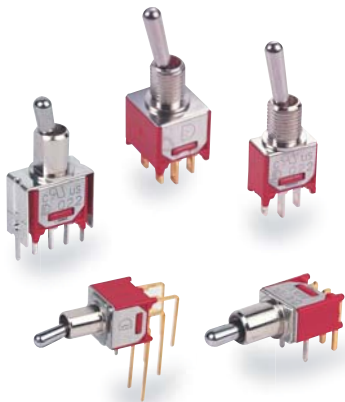

SPECIFICATIONS

CONTACT RATING: Dependent upon contact material See Page 29.

MECHANICAL LIFE: 30,000 make-and-break cycles.

CONTACT RESISTANCE: 20 mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000 MΩ min.

DIELECTRIC STRENGTH: 1,000 Vrms min.@sea level.

OPERATING TEMPERATURE: -40°C to 85°C.

MATERIALS

CASE: Diallyl phthalate (DAP) (UL94v-0).

ACTUATOR: Brass, chrome plated.

BUSHING: Brass or zinc, nickel plated.

HOUSING: Stainless Steel.

SWITCH SUPPORT: Brass,tin plated.

TERMINAL/CONTACT: Brass or copper alloy,with Silver or gold plated.(See Page 29)

HOW TO ORDER

MODEL NO. ACTUATOR BUSHING TERMINATIONS TERMINAL PLATING SEAL RoHS SOLDERING



Model NO.

2MS1 SP ON-NONE-ON
2MS2 SP ON-NONE-(ON)
2MS3 SP ON-OFF-ON
2MS4 SP (ON)-OFF-(ON)
2MS5 SP ON-OFF-(ON)
2MS6 SP OFF-NONE-ON
2MD1 DP ON-NONE-ON
2MD2 DP ON-NONE-(ON)
2MD3 DP ON-OFF-ON
2MD6 DP ON- ON -ON.

Actuator

T1 9.40 high
T2 5.33 high
T3 7.37 high
T4 10.41 high
T5 5.59 high
TL1 Locking lever
16.00 high
TL2 Locking lever
16.26 high

Bushing

B1 5.59 high,flat (thd)
B2 5.59 high,flat (non-thd)
B3 5.59 high,keyway (thd)
B4 5.59 high,keyway (non-thd)
B5 7.87 high,flat (thd)
B6 7.87 high,flat (non-thd)
B7 6.60 high,keyway (thd)
B8 6.60 high,keyway (non-thd)
B25 8.00 high,keyway,locking lever (thd)

Terminations

M1 Solder Lug
M2 PC thru-hole
M51 15.24 high, wire wrap
M52 6.00 high, wire wrap
M6 Right angle, PC thru-hole
M6N Right angle, snap-in, PC thru-hole
M7 Vertical right angle, PC thru-hole
M7N Vertical right angle, snap-in, PC thru-hole
VS2 V-bracket
V2N Snap-in V-bracket
VS3 V-bracket
V3N Snap-in V-bracket

* 2MS6 model type not applicable to
M6/M6N/M7/M7N terminations

Terminal plating

Q Silver
R Gold
C Gold over silver



Seal

E EPOXY (std)
N NO EPOXY

RoHS soldering

S RoHS & Lead Free

SWITCH FUNCTION


NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
								
SP	Q2211	2MS1	ON	NONE	ON	2-3 	N/A	2-1
	Q2212	2MS2	ON	NONE	(ON)		OPEN	
	Q2213	2MS3	ON	OFF	ON			
	Q2214	2MS4	(ON)	OFF	(ON)	OPEN	N/A	3-1
	Q2215	2MS5	ON	OFF	(ON)			
	Q2216	2MS6	OFF	NONE	ON			
DP	Q2221	2MD1	ON	NONE	ON	2-3,5-6 	N/A	2-1,5-4
	Q2222	2MD2	ON	NONE	(ON)		OPEN	
	Q2223	2MD3	ON	OFF	ON	2-3,5-6		
		Q2226	2MD6	ON	ON	ON	2-3,5-6	2-3,5-4

2M
Toggle Switches

()=MOMENTARY

▲ Please check the availability in advance before order


POLE OPTIONS

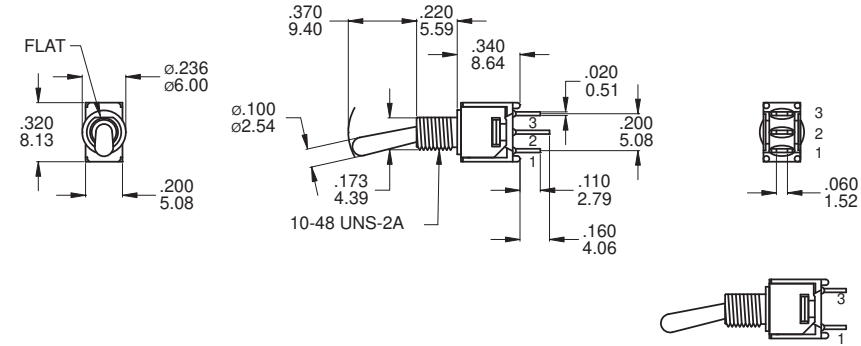

SPDT

2MS6 Models : Omit 2nd terminal

Part No. Shown : 2MS1T1B1M1QES

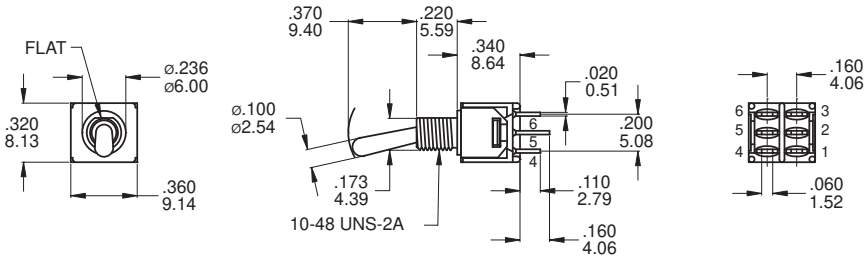

DPDT


Part No. Shown : 2MD1T1B1M1RES

2M Series


Sub-Miniature Toggle Switches

ACTUATOR OPTIONS


T1




T2




T3



T4



T5




NONE: T1,T2,T3 Actuator shown with B1 to B4 bushing, subtract 0.09 (2.29) for B5 bushing, subtract 0.04 (1.02) for B7 bushing.



T4,T5 Actuator shown with B5,B6 bushing, add 0.09 (2.29) for B1 to B3 bushing, add 0.05 (1.27) for B7 bushing.

Std for M1,M2 Terminal sub .016(.040) for M6,M7,VSX

TL1B25

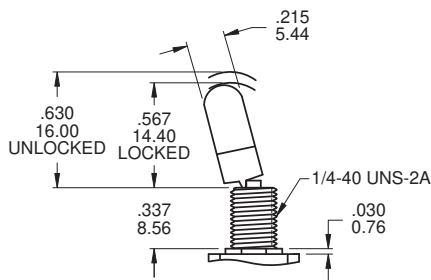


TL2B25

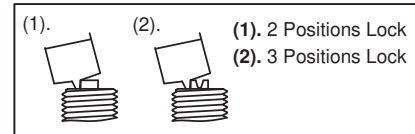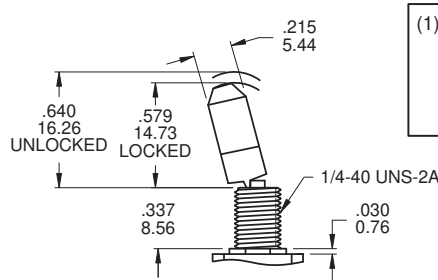


BUSHING OPTIONS


B1 THD
B2 NON-THD




B3 THD
B4 NON-THD



B5 THD
B6 NON-THD





B7 THD
B8 NON-THD



TERMINATION OPTIONS



M1 Solder lug



Double Pole

.020(0.51) THK.



M2 PC Thru-hole



Double Pole

.020(0.51) THK.



M51 Wire Wrap



Double Pole

.020(0.51) THK.


M52 Wire Wrap




Double Pole

.020(0.51) THK.

M6

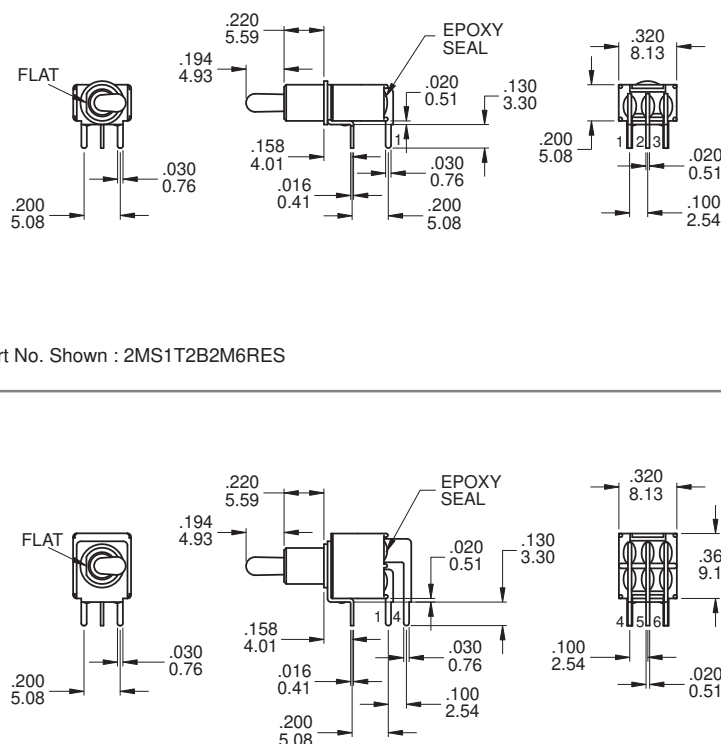


P.C. MOUNTING




SPDT

Part No. Shown : 2MS1T2B2M6RES

M6

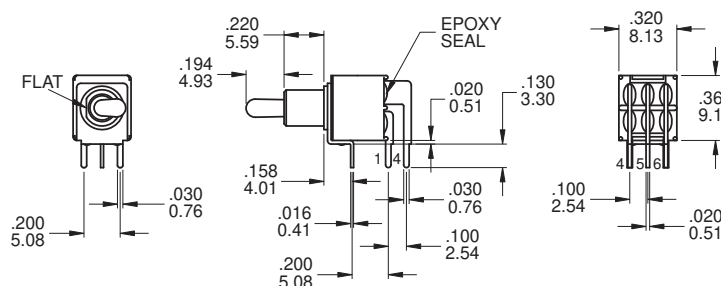



P.C. MOUNTING




DPDT

Part No. Shown : 2MD1T2B2M6QES

M7

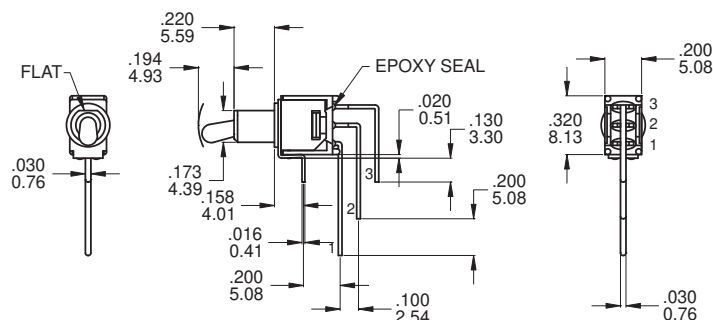

P.C. MOUNTING



SPDT




Part No. Shown : 2MS1T2B2M7RES

2M Series

Sub-Miniature Toggle Switches

2M
Toggle Switches



M7

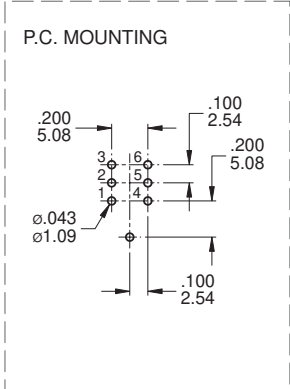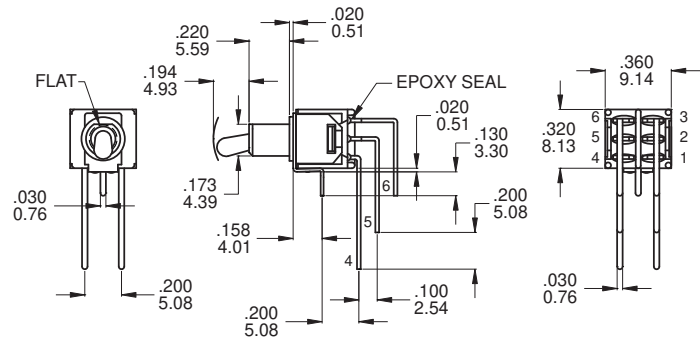

DPDT

Part No. Shown : 2MD1T2B2M7RES



VS2 - VS3

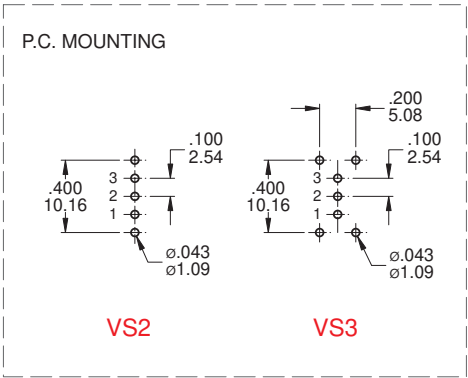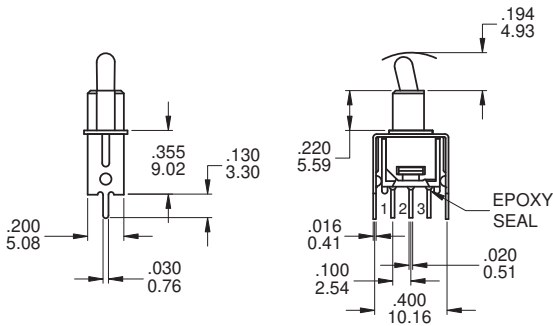

SPDT

Part No. Shown : 2MS1T2B2VS2QES

VS2 - VS3

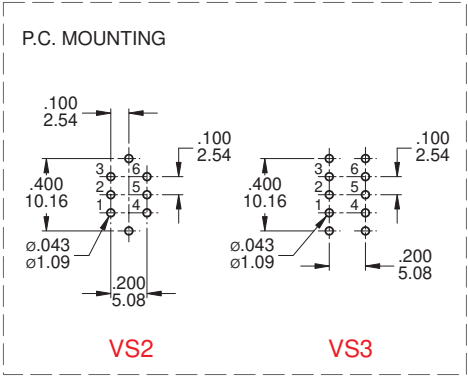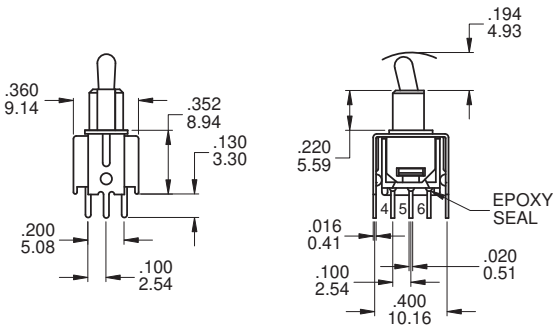

DPDT

Part No. Shown : 2MD1T2B2VS2QES


SNAP-IN TERMINATION OPTIONS

M6N



M7N

V2N


V3N

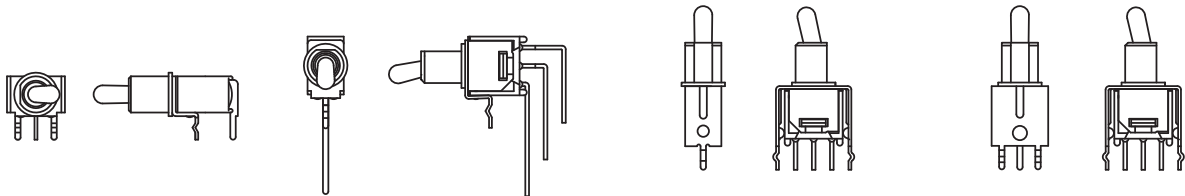


PANEL MOUNTING

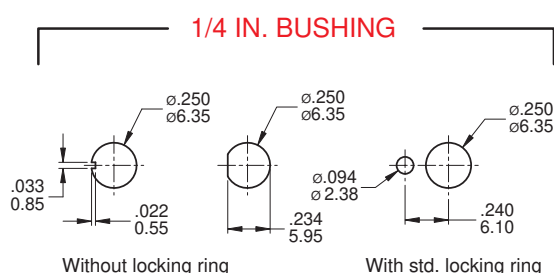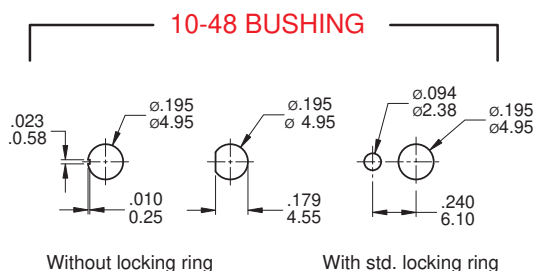


HARDWARE

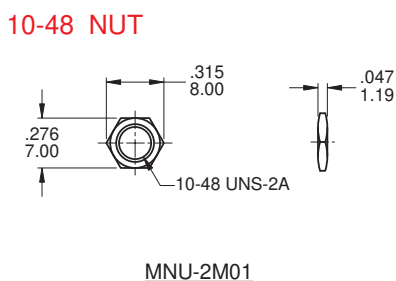


Supplied standard with
B1/ B3 bushing




Supplied standard with
B1 / B3 bushing




Supplied standard with
B5 / B7 bushing

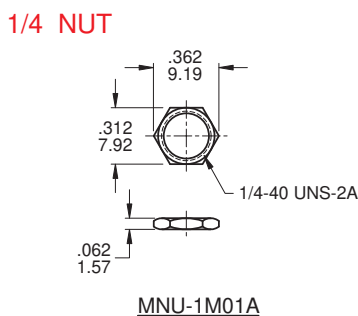

Supplied standard with
B5/ B7 bushing



Supplied standard with B7 bushing



Supplied standard with B5 bushing

CONTACT MATERIAL OPTIONS

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Silver	3 Amps with resistant load @ 120VAC or 28VDC
C	Gold over Silver	Gold over silver	1 Amps with resistant load @ 250VAC
R	Gold	Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

SOLDERING PROCESSES

MANUAL SOLDERING: Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

WAVE SOLDERING: Recommended Soldering Temperature: $270 \pm 5^{\circ}\text{C}$
Duration of Solder Immersion: Max 5 sec. (PCB is 1.6mm in thickness)