



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Metallized Polypropylene (PP) - Capacitors for DC-Link Applications.
Capacitances from 1.0 μF to 400 μF .
Rated Voltages from 400 VDC to 1300 VDC.

Special Features

- Capacitances up to 400 μF
- High volume/capacitance ratio
- Excellent self-healing properties
- Very low dissipation factor
- High reliability
- 2-pin and 4-pin contact configuration (plate versions on request)
- AEC-Q200 qualified
- According to RoHS 2011/65/EU

Typical Applications

As intermediate circuit capacitor e.g. in high power converter technology, power supplies, solar inverters etc.

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

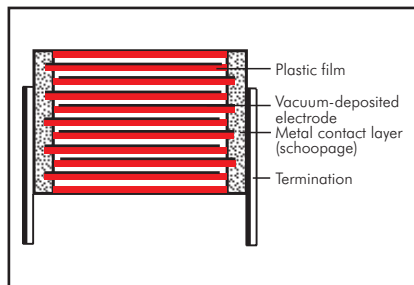

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire (plate versions on request).

Marking:

Colour: Red. Marking: Black.

Electrical Data

Capacitance range: 1 μF to 400 μF
 (intermediate values on request)

Rated voltages: 400 VDC, 500 VDC, 600 VDC, 800 VDC, 900 VDC, 1100 VDC, 1300 VDC

Capacitance tolerances: $\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:
 -55°C to $+105^\circ\text{C}$ (hot spot including self-heating)

Climatic test category: 55/085/56
 in accordance with IEC

Dissipation factors at $+20^\circ\text{C}$:

PCM	1 kHz	10 kHz
27.5	$\leq 15 \times 10^{-4}$	$\leq 160 \times 10^{-4}$
37.5	$\leq 30 \times 10^{-4}$	$\leq 210 \times 10^{-4}$
52.5	$\leq 50 \times 10^{-4}$	$\leq 260 \times 10^{-4}$

Voltage and current derating:

A derating factor of 1.35% per K must be applied from $+85^\circ\text{C}$ for DC voltages and from $+70^\circ\text{C}$ for AC currents (I_{rms}). Additionally a derating factor of 4.5% per K must be applied from $+85^\circ\text{C}$ for AC currents (I_{rms})

Reliability: Operational life $> 100\,000$ hours (U_r and 70°C)

Failure rate λ_0 ($0.5 \times U_r$ and 40°C)

$\Pi = C_N [\mu\text{F}] \times U_r [\text{V}] $	λ_0
$\Pi \leq 10\,000$	< 2 fit
$10\,000 < \Pi \leq 25\,000$	< 5 fit
$25\,000 < \Pi \leq 50\,000$	< 10 fit
$50\,000 < \Pi \leq 100\,000$	< 20 fit
$\Pi > 100\,000$	< 30 fit

Maximum pulse rise time:

PCM	max. pulse rise time V/ μsec at $T_A < 40^\circ\text{C}$						
	400 VDC	500 VDC	600 VDC	800 VDC	900 VDC	1100 VDC	1300 VDC
27.5	11	15	27	29	35	43	50
37.5	8	10	19	21	22	29	35
52.5	5	7	13	15	18	21	25

for pulses equal to the rated voltage

Insulation resistance at $+20^\circ\text{C}$:

$\geq 30\,000$ sec ($\text{M}\Omega \times \mu\text{F}$)

Measuring voltage: 100 V/1 min.

Test voltage:

1.2 U_r , 2sec

Dielectric absorption: 0.05 %


Specific dissipation:

Box size W x H x L in mm	Specific dissipation in Watts per K above the ambient temperature
9 x 19 x 31.5	0.021
11 x 21 x 31.5	0.025
13 x 24 x 31.5	0.030
15 x 26 x 31.5	0.034
17 x 29 x 31.5	0.039
27 x 15 x 41.5	0.043
17 x 34.5 x 31.5	0.044
20 x 39.5 x 31.5	0.053
19 x 32 x 41.5	0.054
20 x 39.5 x 41.5	0.065
24 x 45.5 x 41.5	0.080
31 x 46 x 41.5	0.092
35 x 50 x 41.5	0.106
40 x 55 x 41.5	0.123
35 x 50 x 57	0.132
45 x 55 x 57	0.164
45 x 65 x 57	0.184

Packing

Packing units at the end of the catalogue

For further details and graphs please refer to Technical Information.

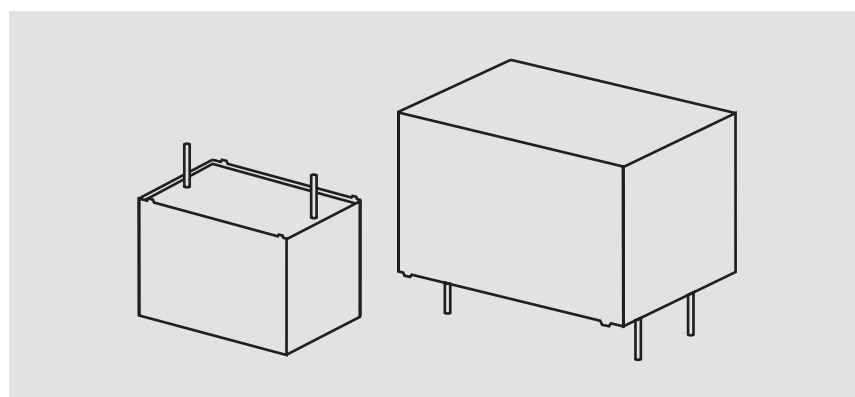

Continuation

General Data

Capacitance						400 VDC (70° C) / 300 VDC (85° C)			Part number
	W	H	L	PCM**	Pin	I_S A	I_{rms}^* (10 kHz)* A	ESR (10 kHz)* mΩ	
1 μF	9	19	31.5	27.5	2	11	1	238.7	DCP4G041006A_____
2 "	9	19	31.5	27.5	2	22	1.5	119.4	DCP4G042006A_____
3 "	9	19	31.5	27.5	2	33	1.5	79.6	DCP4G043006A_____
4 "	9	19	31.5	27.5	2	44	2	59.7	DCP4G044006A_____
5 "	9	19	31.5	27.5	2	55	2	47.7	DCP4G045006A_____
7 "	9	19	31.5	27.5	2	77	2.5	34.1	DCP4G047006A_____
10 μF	11	21	31.5	27.5	2/4	110	3.5	23.9	DCP4G051006B_____
15 "	13	24	31.5	27.5	2/4	165	4.5	15.9	DCP4G051506D_____
20 "	15	26	31.5	27.5	2/4	220	5.5	11.9	DCP4G052006F_____
25 "	17	29	31.5	27.5	2/4	275	6.5	9.5	DCP4G052506G_____
30 "	17	34.5	31.5	27.5	2/4	330	7	8	DCP4G053006I_____
40 "	20	39.5	31.5	27.5	2/4	440	9.5	6	DCP4G054006J_____
50 "	20	39.5	41.5	37.5	2/4	400	11	5.4	DCP4G055007G_____
60 "	20	39.5	41.5	37.5	2/4	480	11.5	4.8	DCP4G056007G_____
70 "	24	45.5	41.5	37.5	2/4	560	15	3.6	DCP4G057007H_____
80 "	24	45.5	41.5	37.5	2/4	640	17	2.7	DCP4G058007H_____
90 "	24	45.5	41.5	37.5	2/4	720	17.5	2.6	DCP4G059007H_____
100 μF	31	46	41.5	37.5	2/4	800	19	2.5	DCP4G061007I_____
120 "	31	46	41.5	37.5	2/4	960	20	2.3	DCP4G061207I_____
140 "	35	50	41.5	37.5	2/4	1120	22.5	2.1	DCP4G061407J_____
150 "	35	50	41.5	37.5	2/4	1200	23	2	DCP4G061507J_____
160 "	40	55	41.5	37.5	2/4	1280	28	1.6	DCP4G061607K_____
180 "	40	55	41.5	37.5	2/4	1440	29.5	1.4	DCP4G061807K_____
190 "	40	55	41.5	37.5	2/4	1520	31.5	1.2	DCP4G061907K_____
200 "	40	55	41.5	37.5	2/4	1600	32.5	1.2	DCP4G062007K_____
220 "	35	50	57	52.5	4	1100	27	1.8	DCP4G062209F_____
250 "	45	55	57	52.5	4	1250	32	1.6	DCP4G062509H_____
270 "	45	55	57	52.5	4	1350	33.5	1.5	DCP4G062709H_____
300 "	45	55	57	52.5	4	1500	35	1.3	DCP4G063009H_____
330 "	45	65	57	52.5	4	1650	37	1.2	DCP4G063309J_____
350 "	45	65	57	52.5	4	1750	40	1.1	DCP4G063509J_____
370 "	45	65	57	52.5	4	1850	41.5	1.1	DCP4G063709J_____
400 "	45	65	57	52.5	4	2000	43	1	DCP4G064009J_____

* General guide

* Permissible I_{rms} at 10° C internal temperature rise (general guide)


** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:


Version code: 2-pin = D2
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD
Taped version see page 149.

2-pin version

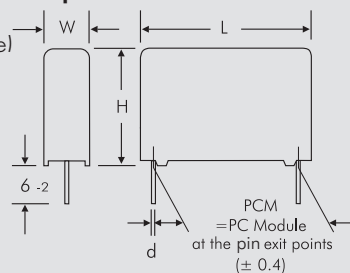

PCM	d
27.5	0.8
37.5	1

4-pin version

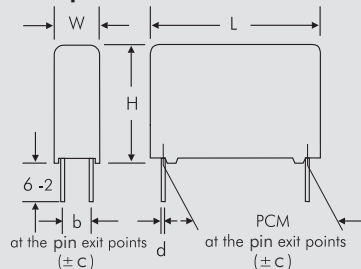

W	PCM	b	d	c
11	27.5	5	0.8	0.4
13	27.5	7.5	0.8	0.4
15	27.5	7.5	0.8	0.4
17	27.5	10	0.8	0.4
20	27.5	12.5	0.8	0.4
20	37.5	12.5	1	0.4
24	37.5	12.5	1	0.4
31	37.5	20	1	0.4
35	37.5	20	1	0.4
40	37.5	20	1	0.4
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Rights reserved to amend design data without prior notification.

Continuation page 124

Continuation

General Data

Capacitance	500 VDC (70° C) / 400 VDC (85° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} * (10 kHz)* A	ESR (10 kHz)* mΩ	
1 µF	9	19	31.5	27.5	2	15	1	238.7	DCP4H141006A_____
2 "	9	19	31.5	27.5	2	30	1.5	119.4	DCP4H142006A_____
3 "	9	19	31.5	27.5	2	45	1.5	79.6	DCP4H143006A_____
5 "	9	19	31.5	27.5	2	75	2.5	47.7	DCP4H145006A_____
7 "	11	21	31.5	27.5	2/4	105	3	34.1	DCP4H147006B_____
8 "	13	24	31.5	27.5	2/4	120	3	29.8	DCP4H148006D_____
10 µF	13	24	31.5	27.5	2/4	150	4	23.9	DCP4H151006D_____
12 "	15	26	31.5	27.5	2/4	180	4	19.9	DCP4H151206F_____
15 "	17	29	31.5	27.5	2/4	225	5	15.9	DCP4H151506G_____
20 "	17	34.5	31.5	27.5	2/4	300	6	11.9	DCP4H152006I_____
22 "	20	39.5	31.5	27.5	2/4	330	7	10.9	DCP4H152206J_____
25 "	20	39.5	31.5	27.5	2/4	375	7.5	9.5	DCP4H152506J_____
30 "	20	39.5	41.5	37.5	2/4	300	9	7.9	DCP4H153007G_____
35 "	20	39.5	41.5	37.5	2/4	350	8.5	9.1	DCP4H153507G_____
40 "	20	39.5	41.5	37.5	2/4	400	10	5.7	DCP4H154007G_____
	24	45.5	41.5	37.5	2/4	400	10	8	DCP4H154007H_____
45 "	24	45.5	41.5	37.5	2/4	450	12.5	5	DCP4H154507H_____
50 "	24	45.5	41.5	37.5	2/4	500	13	4.8	DCP4H155007H_____
55 "	24	45.5	41.5	37.5	2/4	550	14	4	DCP4H155507H_____
60 "	31	46	41.5	37.5	2/4	600	14	4.7	DCP4H156007I_____
65 "	31	46	41.5	37.5	2/4	650	16.5	3.3	DCP4H156507I_____
70 "	31	46	41.5	37.5	2/4	700	18	2.9	DCP4H157007I_____
75 "	31	46	41.5	37.5	2/4	750	17	3.2	DCP4H157507I_____
80 "	31	46	41.5	37.5	2/4	800	18	2.8	DCP4H158007I_____
85 "	35	50	41.5	37.5	2/4	850	10.5	3.2	DCP4H158507J_____
90 "	35	50	41.5	37.5	2/4	900	21	2.4	DCP4H159007J_____
95 "	35	50	41.5	37.5	2/4	950	21.5	2.2	DCP4H159507J_____
100 µF	35	50	41.5	37.5	2/4	1000	24	1.9	DCP4H161007J_____
	35	50	57	52.5	4	700	18	4	DCP4H161009F_____
110 "	40	55	41.5	37.5	2/4	1100	19	2.9	DCP4H161107K_____
	35	50	57	52.5	4	770	19	3.6	DCP4H161109F_____
120 "	40	55	41.5	37.5	2/4	1200	22.5	2.7	DCP4H161207K_____
	35	50	57	52.5	4	840	20	3.3	DCP4H161209F_____
130 "	40	55	41.5	37.5	2/4	1300	23	2.4	DCP4H161307K_____
	35	50	57	52.5	4	910	21	3.1	DCP4H161309F_____
140 "	35	50	57	52.5	4	980	21.5	2.8	DCP4H161409F_____
150 "	35	50	57	52.5	4	1050	22.5	2.7	DCP4H161509F_____
160 "	45	55	57	52.5	4	1120	25.5	2.5	DCP4H161609H_____
170 "	45	55	57	52.5	4	1190	26.5	2.3	DCP4H161709H_____
180 "	45	55	57	52.5	4	1260	27	2.2	DCP4H161809H_____
190 "	45	55	57	52.5	4	1330	28	2.1	DCP4H161909H_____
200 "	45	55	57	52.5	4	1400	28.5	2	DCP4H162009H_____
210 "	45	55	57	52.5	4	1470	29.5	1.9	DCP4H162109H_____
220 "	45	65	57	52.5	4	1540	32	1.8	DCP4H162209J_____
240 "	45	65	57	52.5	4	1680	33.5	1.7	DCP4H162409J_____

* General guide

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation page 125

Continuation

General Data

Capacitance						600 VDC (70° C) / 450 VDC (85° C)			Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} (10 kHz)* A	ESR (10 kHz)* mΩ	
2 µF	9	19	31.5	27.5	2	54	2	56	DCP4I042006A_____
5 "	13	24	31.5	27.5	2/4	135	3.5	22	DCP4I045006D_____
7 "	15	26	31.5	27.5	2/4	189	4.5	16	DCP4I047006F_____
10 µF	17	29	31.5	27.5	2/4	270	6	11	DCP4I051006G_____
	27	15	41.5	37.5	2/4	190	6.5	10	DCP4I051007M_____
15 "	17	34.5	31.5	27.5	2/4	405	7.5	7.4	DCP4I051506I_____
20 "	20	39.5	31.5	27.5	2/4	540	9	6.2	DCP4I052006J_____
	20	39.5	41.5	37.5	2/4	380	10	6.2	DCP4I052007G_____
25 "	20	39.5	41.5	37.5	2/4	475	11.5	5	DCP4I052507G_____
30 "	24	45.5	41.5	37.5	2/4	570	14	4.1	DCP4I053007H_____
35 "	24	45.5	41.5	37.5	2/4	665	14.5	3.8	DCP4I053507H_____
40 "	31	46	41.5	37.5	2/4	760	16.5	3.3	DCP4I054007I_____
45 "	31	46	41.5	37.5	2/4	855	17	3.2	DCP4I054507I_____
50 "	35	50	41.5	37.5	2/4	950	19	2.9	DCP4I055007J_____
55 "	35	50	41.5	37.5	2/4	1045	17	3.8	DCP4I055507J_____
60 "	35	50	41.5	37.5	2/4	1140	17.5	3.4	DCP4I056007J_____
65 "	40	55	41.5	37.5	2/4	1235	19.5	3.3	DCP4I056507K_____
	35	50	57	52.5	4	845	20	3.3	DCP4I056509F_____
70 "	40	55	41.5	37.5	2/4	1330	20	3.1	DCP4I057007K_____
	35	50	57	52.5	4	910	20.5	3.1	DCP4I057009F_____
75 "	40	55	41.5	37.5	2/4	1425	20.5	3	DCP4I057507K_____
	35	50	57	52.5	4	975	21	3	DCP4I057509F_____
80 "	40	55	41.5	37.5	2/4	1520	22	2.6	DCP4I058007K_____
	35	50	57	52.5	4	1040	22	2.6	DCP4I058009F_____
85 "	35	50	57	52.5	4	1105	22.5	2.1	DCP4I058509F_____
90 "	35	50	57	52.5	4	1170	23.5	1.9	DCP4I059009F_____
95 "	45	55	57	52.5	4	1235	24	2.8	DCP4I059509H_____
100 µF	45	55	57	52.5	4	1300	25	2.6	DCP4I061009H_____
110 "	45	55	57	52.5	4	1430	26.5	2.3	DCP4I061109H_____
115 "	45	65	57	52.5	4	1495	27.5	2.5	DCP4I061159J_____
120 "	45	65	57	52.5	4	1560	28	2.3	DCP4I061209J_____
130 "	45	65	57	52.5	4	1690	29.5	2.1	DCP4I061309J_____
140 "	45	65	57	52.5	4	1820	31	1.9	DCP4I061409J_____
150 "	45	65	57	52.5	4	1950	33	1.7	DCP4I061509J_____

* General guide


** PCM = Printed circuit module = pin spacing

Dims. in mm.


Part number completion:

Version code:	2-pin	= D2
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 149.		

2-pin version

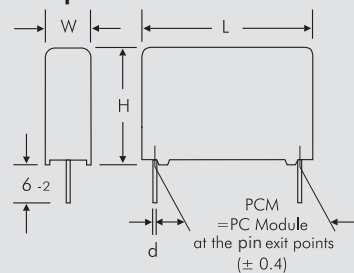

4-pin version

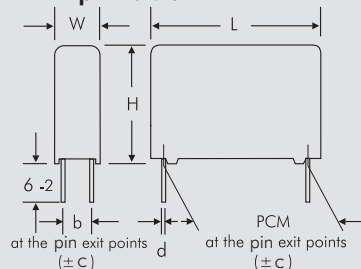

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	800 VDC (70° C) / 700 VDC (85° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} (10 kHz)* A	ESR (10 kHz)* mΩ	
2 µF	9	19	31.5	27.5	2	58	2	52	DCP4L042006A_____
5 "	13	24	31.5	27.5	2/4	145	4	21	DCP4L045006D_____
7 "	17	29	31.5	27.5	2/4	203	5	15	DCP4L047006G_____
10 µF	17	34.5	31.5	27.5	2/4	290	6.5	10	DCP4L051006I_____
15 "	20	39.5	31.5	27.5	2/4	435	9	6.9	DCP4L051506J_____
	20	39.5	41.5	37.5	2/4	315	9.5	6.9	DCP4L051507G_____
20 "	20	39.5	41.5	37.5	2/4	420	10	6.2	DCP4L052007G_____
25 "	24	45.5	41.5	37.5	2/4	525	12.5	5	DCP4L052507H_____
30 "	24	45.5	41.5	37.5	2/4	630	14	4.1	DCP4L053007H_____
35 "	31	46	41.5	37.5	2/4	735	15.5	3.8	DCP4L053507I_____
40 "	31	46	41.5	37.5	2/4	840	16.5	3.3	DCP4L054007I_____
45 "	35	50	41.5	37.5	2/4	945	17.5	3.4	DCP4L054507J_____
50 "	35	50	41.5	37.5	2/4	1050	19	3	DCP4L055007J_____
55 "	40	55	41.5	37.5	2/4	1155	19.5	3.2	DCP4L055507K_____
	35	50	57	52.5	4	825	20.4	3.2	DCP4L055509F_____
60 "	40	55	41.5	37.5	2/4	1260	20.5	2.9	DCP4L056007K_____
	35	50	57	52.5	4	900	21.5	2.9	DCP4L056009F_____
65 "	35	50	57	52.5	4	975	22.5	2.2	DCP4L056509F_____
70 "	45	55	57	52.5	4	1050	23.5	3	DCP4L057009H_____
75 "	45	55	57	52.5	4	1125	24	2.9	DCP4L057509H_____
80 "	45	55	57	52.5	4	1200	24.5	3	DCP4L058009H_____
85 "	45	65	57	52.5	4	1275	25	2.6	DCP4L058509J_____
90 "	45	65	57	52.5	4	1350	25.5	2.5	DCP4L059009J_____
95 "	45	65	57	52.5	4	1425	26	2.4	DCP4L059509J_____
100 µF	45	65	57	52.5	4	1500	26.5	2.3	DCP4L061009J_____
110 "	45	65	57	52.5	4	1650	27.5	2.2	DCP4L061109J_____
115 "	45	65	57	52.5	4	1725	28	2.1	DCP4L061159J_____

Capacitance	900 VDC (70° C) / 760 VDC (85° C)								Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} (10 kHz)* A	ESR (10 kHz)* mΩ	
2 µF	11	21	31.5	27.5	2/4	70	2.5	44	DCP4N042006B_____
5 "	17	29	31.5	27.5	2/4	175	4.5	18	DCP4N045006G_____
7 "	17	34.5	31.5	27.5	2/4	245	6	13	DCP4N047006I_____
10 µF	20	39.5	31.5	27.5	2/4	350	8	8.8	DCP4N051006J_____
	20	39.5	41.5	37.5	2/4	220	8.5	8.8	DCP4N051007G_____
15 "	20	39.5	41.5	37.5	2/4	330	10.5	5.8	DCP4N051507G_____
20 "	24	45.5	41.5	37.5	2/4	440	13	4.8	DCP4N052007H_____
25 "	31	46	41.5	37.5	2/4	550	15.5	3.8	DCP4N052507I_____
30 "	31	46	41.5	37.5	2/4	660	15.5	3.7	DCP4N053007I_____
35 "	35	50	41.5	37.5	2/4	770	18	3.2	DCP4N053507J_____
40 "	40	55	41.5	37.5	2/4	880	19.5	3.2	DCP4N054007K_____
	35	50	57	52.5	4	720	20.5	3.2	DCP4N054009F_____
45 "	35	50	57	52.5	4	810	21	2.8	DCP4N054509F_____
50 "	35	50	57	52.5	4	900	22	3.3	DCP4N055009F_____
55 "	35	50	57	52.5	4	990	22.5	3.2	DCP4N055509F_____
	45	55	57	52.5	4	990	22.5	3.2	DCP4N055509H_____
60 "	45	55	57	52.5	4	1080	23	3	DCP4N056009H_____
65 "	45	55	57	52.5	4	1170	24	2.9	DCP4N056509H_____
70 "	45	65	57	52.5	4	1260	24.5	3.3	DCP4N057009J_____
75 "	45	65	57	52.5	4	1350	25	2.9	DCP4N057509J_____
80 "	45	65	57	52.5	4	1440	25.5	2.8	DCP4N058009J_____

* General guide

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance						1100 VDC (70° C) / 920 VDC (85° C)			Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} (10 kHz)* A	ESR (10 kHz)* mΩ	
2 µF	13	24	31.5	27.5	2/4	86	3	36	DCP4P042006D_____
3 "	15	26	31.5	27.5	2/4	129	4	23	DCP4P043006F_____
5 "	17	34.5	31.5	27.5	2/4	215	5.5	14	DCP4P045006I_____
7 "	20	39.5	31.5	27.5	2/4	301	7.5	10	DCP4P047006J_____
	19	32	41.5	37.5	2/4	203	7.5	10	DCP4P047007F_____
10 µF	20	39.5	41.5	37.5	2/4	290	9.5	7.2	DCP4P051007G_____
15 "	31	46	41.5	37.5	2/4	435	13	5.4	DCP4P051507I_____
20 "	31	46	41.5	37.5	2/4	580	14	5.2	DCP4P052007I_____
	35	50	41.5	37.5	2/4	580	15	4.7	DCP4P052007J_____
25 "	40	55	41.5	37.5	2/4	725	16.5	4.6	DCP4P052507K_____
30 "	35	50	57	52.5	4	630	17.5	4.4	DCP4P053009F_____
35 "	35	50	57	52.5	4	735	18	4	DCP4P053509F_____
40 "	45	55	57	52.5	4	840	19	4.5	DCP4P054009H_____
45 "	45	55	57	52.5	4	945	20	4.1	DCP4P054509H_____
50 "	45	65	57	52.5	4	1050	21	4.1	DCP4P055009J_____
55 "	45	65	57	52.5	4	1150	22	3.8	DCP4P055509J_____
60 "	45	65	57	52.5	4	1260	23	3.5	DCP4P056009J_____

Capacitance						1300 VDC (70° C) / 1100 VDC (85° C)			Part number
	W	H	L	PCM**	Pin	I _S A	I _{rms} (10 kHz)* A	ESR (10 kHz)* mΩ	
2 µF	15	26	31.5	27.5	2/4	100	3	36	DCP4R242006F_____
5 "	20	39.5	31.5	27.5	2/4	250	6	14	DCP4R245006J_____
	20	39.5	41.5	37.5	2/4	175	7	14	DCP4R245007G_____
7 "	20	39.5	41.5	37.5	2/4	245	8	10	DCP4R247007G_____
10 µF	24	45.5	41.5	37.5	2/4	350	10.5	7.2	DCP4R251007H_____
15 "	31	46	41.5	37.5	2/4	525	14	4.8	DCP4R251507I_____
20 "	40	55	41.5	37.5	2/4	700	17.5	4	DCP4R252007K_____
	35	50	57	52.5	4	500	18	4	DCP4R252009F_____
25 "	35	50	57	52.5	4	625	19	3.6	DCP4R252509F_____
30 "	45	55	57	52.5	4	750	20	4	DCP4R253009H_____
35 "	45	65	57	52.5	4	875	21	4.1	DCP4R253509J_____
40 "	45	65	57	52.5	4	1000	22	3.7	DCP4R254009J_____

* General guide


** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:


Version code: 2-pin = D2
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD
Taped version see page 149.

2-pin version

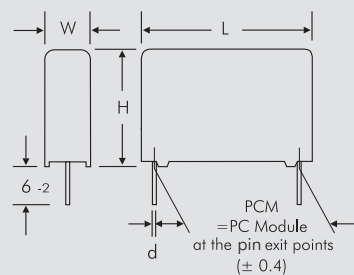

PCM	d
27.5	0.8
37.5	1

4-pin version

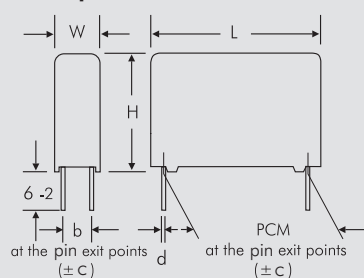

W	PCM	b	d	c
11	27.5	5	0.8	0.4
13	27.5	7.5	0.8	0.4
15	27.5	7.5	0.8	0.4
17	27.5	10	0.8	0.4
20	27.5	12.5	0.8	0.4
19	37.5	10	1	0.4
20	37.5	12.5	1	0.4
24	37.5	12.5	1	0.4
31	37.5	20	1	0.4
35	37.5	20	1	0.4
40	37.5	20	1	0.4
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Rights reserved to amend design data without prior notification.

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

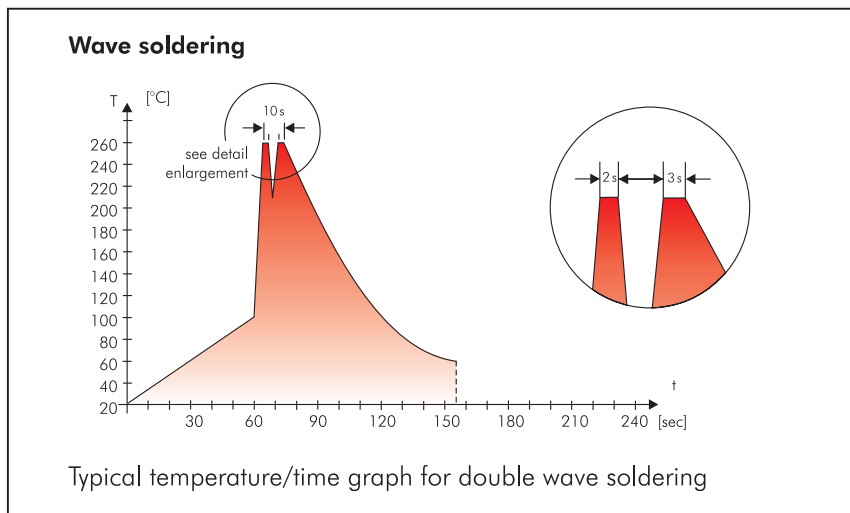

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the ifaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- | | |
|------------------------|------------|
| - Lead | - PBB/PBDE |
| - PCB | - Arsenic |
| - CFC | - Cadmium |
| - Hydrocarbon chloride | - Mercury |
| - Chromium 6+ | - etc. |

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

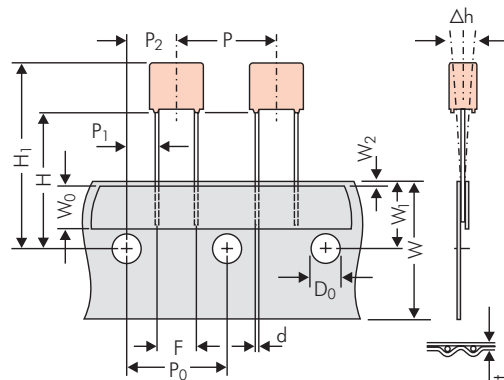


Diagram 1:
PCM 2.5/5/7.5mm

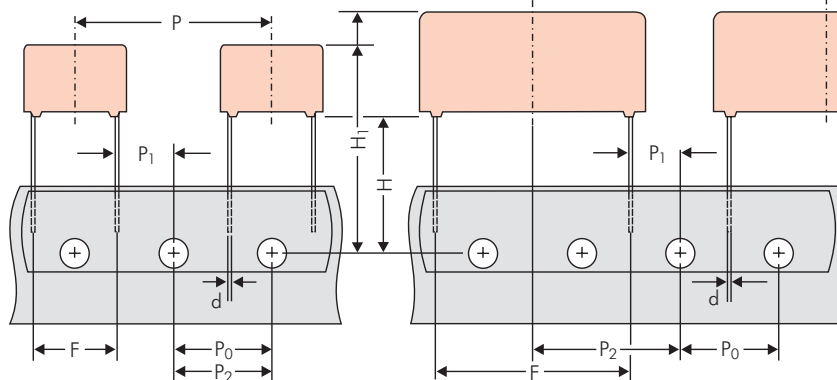


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 150)		ROLL/AMMO			AMMO			
		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions		REEL Ø 360 max. Ø 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL Ø 500 max. Ø 25 ±1	54 ±2 60 ±2 or 68 ±2 } depending on PCM and component dimensions
Unit		see details page 151.						

Dims in mm.

* Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

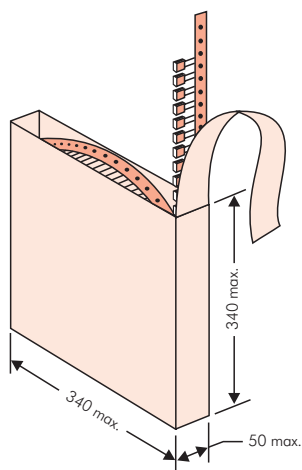

■ AMMO Packaging

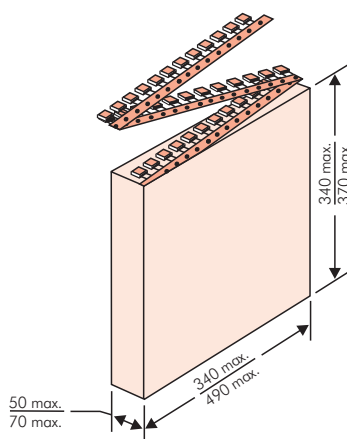

■ REEL Packaging

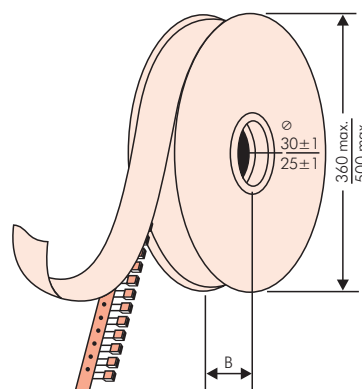

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made In Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K89D		
Handling Unit:	MKS 2	QTY: 5.000	COO: DE
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5		
1000067326	Standard 10% Loss - Standard	Drühte 6-2	Week 03/2011
	Vorlage Debitor Inland		

BARCODE „Code 39“

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	H16.5	H18.5	ø 360 H16.5	ø 500 H18.5		340 × 340 H16.5	490 × 370 H18.5								
W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D	
2.5 mm	2.5	7	4.6	0B	5000	2200	2500	—	2800	—					
	3	7.5	4.6	0C	5000	2000	2300	—	2300	—					
	3.8	8.5	4.6	0D	5000	1500	1800	—	1800	—					
	4.6	9	4.6	0E	5000	1200	1500	—	1500	—					
	5.5	10	4.6	0F	5000	900	1200	—	1200	—					
5 mm	2.5	6.5	7.2	1A	5000	2200	2500	—	2800	—					
	3	7.5	7.2	1B	5000	2000	2300	—	2300	—					
	3.5	8.5	7.2	1C	5000	1600	2000	—	2000	—					
	4.5	6	7.2	1D	6000	1300	1500	—	1500	—					
	4.5	9.5	7.2	1E	4000	1300	1500	—	1500	—					
	5	10	7.2	1F	3500	1100	1400	—	1400	—					
	5.5	7	7.2	1G	4000	1000	1200	—	1200	—					
	5.5	11.5	7.2	1H	2500	1000	1200	—	1200	—					
	6.5	8	7.2	1I	2500	800	1000	—	1000	—					
	7.2	8.5	7.2	1J	2500	700	1000	—	1000	—					
	7.2	13	7.2	1K	2000	700	950	—	1000	—					
	8.5	10	7.2	1L	2000	600	800	—	800	—					
	8.5	14	7.2	1M	1500	600	800	—	800	—					
	11	16	7.2	1N	1000	500	600	—	640	—					
7.5 mm	2.5	7	10	2A	5000	—	2500	4400	2500	—					
	3	8.5	10	2B	5000	—	2200	4300	2300	4150					
	4	9	10	2C	4000	—	1700	3200	1700	3100					
	4.5	9.5	10.3	2D	3500	—	1500	2900	1400	2700					
	5	10.5	10.3	2E	3000	—	1300	2500	1300	—					
	5.7	12.5	10.3	2F	2000	—	1000	2200	1100	—					
	7.2	12.5	10.3	2G	1500	—	900	1800	1000	—					
10 mm	3	9	13	3A	3000	—	1100	2200	—	1900					
	4	8.5	13.5	FA	3000	—	900	1600	—	1450					
	4	9	13	3C	3000	—	900	1600	—	1450					
	4	9.5	13	3D	3000	—	900	1600	—	1400					
	5	10	13.5	FB	2000	—	700	1300	—	1200					
	5	11	13	3F	3000	—	700	1300	—	1200					
	6	12	13	3G	2400	—	550	1100	—	1000					
	6	12.5	13	3H	2400	—	550	1100	—	1000					
15 mm	8	12	13	3I	2000	—	400	800	—	740					
	5	11	18	4B	2400	—	600	1200	—	1150					
	5	13	19	FC	1000	—	600	1200	—	1200					
	6	12.5	18	4C	2000	—	500	1000	—	1000					
	6	14	19	FD	1000	—	500	1000	—	1000					
	7	14	18	4D	1600	—	450	900	—	850					
	7	15	19	FE	1000	—	450	900	—	850					
	8	15	18	4F	1200	—	400	800	—	740					
	8	17	19	FF	500	—	400	800	—	740					
	9	14	18	4H	1200	—	350	700	—	650					
	9	16	18	4J	900	—	350	700	—	650					
22.5 mm	10	18	19	FG	500	—	300	650	—	590					
	11	14	18	4M	1000	—	300	600	—	540					
	5	14	26.5	5A	1200	—	—	800	—	770					
	6	15	26.5	5B	1000	—	—	700	—	640					
	7	16.5	26.5	5D	760	—	—	600	—	550					
	8	20	28	5H	500	—	—	500	—	480					
	8.5	18.5	26.5	5F	500	—	—	480	—	450					
	10	22	28	FI	570*	—	—	420	—	380					
	10.5	19	26.5	5G	594*	—	—	400	—	360					
	10.5	20.5	26.5	5H	594*	—	—	400	—	360					
11	21	26.5	5I	561*	—	—	380	—	350						
12	24	28	FJ	480*	—	—	350	—	310						

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370				
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*	–	–	–	–	460/340*	–	–	–	420	–
	11	21	31.5	6B	459*	–	–	–	–	380/280*	–	–	–	350	–
	13	24	31.5	6D	378*	–	–	–	–	300	–	–	–	290	–
	13	25	33	FK	405*	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	324*	–	–	–	–	270	–	–	–	250	–
	15	26	33	FL	324*	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	198*	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	198*	–	–	–	–	–	–	–	–	–	–
	20	32	33	FM	162*	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	162*	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	441*	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	357*	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	294*	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	252*	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	154*	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	140*	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	126*	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	112*	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	84*	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	120*	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	80*	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	84*	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	25*	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–
52.5 mm	25	45	57	9D	70*	–	–	–	–	–	–	–	–	–	–
	30	45	57	9E	60*	–	–	–	–	–	–	–	–	–	–
	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
 Field 5 - 6: Rated voltage
 Field 7 - 10: Capacitance
 Field 11 - 12: Size and PCM
 Field 13 - 14: Version code (e.g. Snubber versions)
 Field 15: Capacitance tolerance
 Field 16: Packing
 Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μF			2.5x6.5x7.2			-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:			Size:			Tolerance:		Packing:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022			4.8x3.3x3 Size 1812 = KA			±20% = M		AMMO H16.5 340x340 = A			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047			4.8x3.3x4 Size 1812 = KB			±10% = K		AMMO H16.5 490x370 = B			
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100			5.7x5.1x3.5 Size 2220 = QA			±5% = J		AMMO H18.5 340x340 = C			
FKP 02 = FKPO				250 VDC = F0		150 pF = 0150			5.7x5.1x4.5 Size 2220 = QB			±2.5% = H		AMMO H18.5 490x370 = D			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220			7.2x6.1x3 Size 2824 = TA			±1% = E		REEL H16.5 360 = F			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330			7.2x6.1x5 Size 2824 = TB			...		REEL H16.5 500 = H			
FKP 2 = FKP2				520 VDC = H2		470 pF = 0470			10.2x7.6x5 Size 4030 = VA					REEL H18.5 360 = I			
FKS 3 = FKS3				600 VDC = I0		680 pF = 0680			12.7x10.2x6 Size 5040 = XA					REEL H18.5 500 = J			
FKP 3 = FKP 3				630 VDC = J0		1000 pF = 1100			15.3x13.7x7 Size 6054 = YA					ROLL H16.5 = N			
MKS 2 = MKS2				700 VDC = K0		1500 pF = 1150			2.5x7x4.6 PCM 2.5 = 0B					ROLL H18.5 = O			
MKP 2 = MKP2				800 VDC = L0		2200 pF = 1220			3x7.5x4.6 PCM 2.5 = 0C					BLISTER W12 180 = P			
MKS 4 = MKS4				850 VDC = M0		3300 pF = 1330			2.5x6.5x7.2 PCM 5 = 1A					BLISTER W12 330 = Q			
MKP 4C = MKPC				900 VDC = N0		4700 pF = 1470			3x7.5x7.2 PCM 5 = 1B					BLISTER W16 330 = R			
MKP 4 = MKP4				1000 VDC = O1		6800 pF = 1680			2.5x7x10 PCM 7.5 = 2A					BLISTER W24 330 = T			
MKP 10 = MKP1				1100 VDC = P0		0.01 μF = 2100			3x8.5x10 PCM 7.5 = 2B					Bulk/TPS Standard = S			
FKP 1 = FKP1				1200 VDC = Q0		0.022 μF = 2220			3x9x13 PCM 10 = 3A					...			
MKP-X2 = MKX2				1250 VDC = R0		0.047 μF = 2470			4x9x13 PCM 10 = 3C								
MKP-X1 R = MKX1				1500 VDC = S0		0.1 μF = 3100			5x11x18 PCM 15 = 4B								
MKP-Y2 = MKY2				1600 VDC = T0		0.22 μF = 3220			6x12.5x18 PCM 15 = 4C								
MP 3-X2 = MPX2				2000 VDC = U0		0.47 μF = 3470			5x14x26.5 PCM 22.5 = 5A								
MP 3-X1 = MPX1				2500 VDC = V0		1 μF = 4100			6x15x26.5 PCM 22.5 = 5B								
MP 3-Y2 = MPY2				3000 VDC = W0		2.2 μF = 4220			9x19x31.5 PCM 27.5 = 6A								
MP 3R-Y2 = MPRY				4000 VDC = X0		4.7 μF = 4470			11x21x31.5 PCM 27.5 = 6B								
MKP 4F = MKPF				6000 VDC = Y0		10 μF = 5100			9x19x41.5 PCM 37.5 = 7A								
Snubber MKP = SNMP				250 VAC = 0V		22 μF = 5220			11x22x41.5 PCM 37.5 = 7B								
Snubber FKP = SNFP				275 VAC = 1W		47 μF = 5470			19x31x56 PCM 48.5 = 8D								
GTO MKP = GTOM				300 VAC = 2W		100 μF = 6100			25x45x57 PCM 52.5 = 9D								
DC-LINK MKP 3 = DCP3				305 VAC = AV		220 μF = 6220			...								
DC-LINK MKP 4 = DCP4				350 VAC = BV		1000 μF = 7100											
DC-LINK MKP 4S = DCP5				440 VAC = 4W		1500 μF = 7150											
DC-LINK MKP 5 = DCP5				500 VAC = 5W		...											
DC-LINK MKP 6 = DCP6				...													
DC-LINK HC = DCHC																	
DC-LINK HY = DCHY																	
						</											