

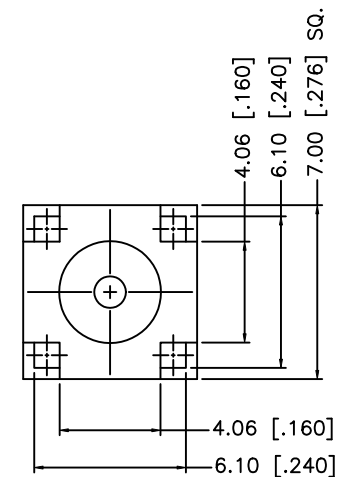
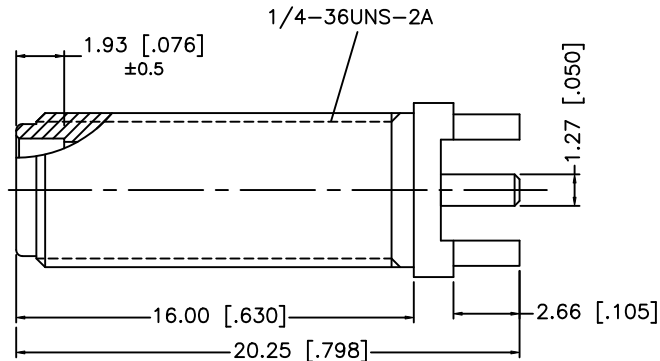


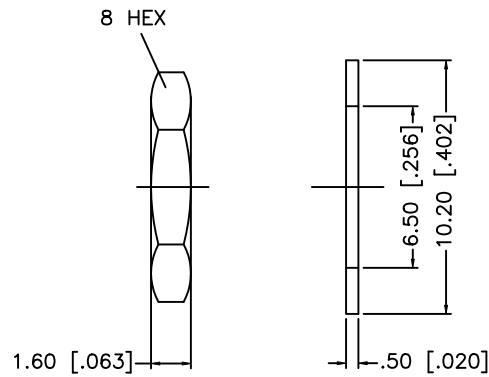

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DATE	ECR NO.	DESCRIPTION
NC	12/12/05	—	INITIAL RELEASE
A	10/14/08	—	REVISE OVERALL LENGTH TO 20.25

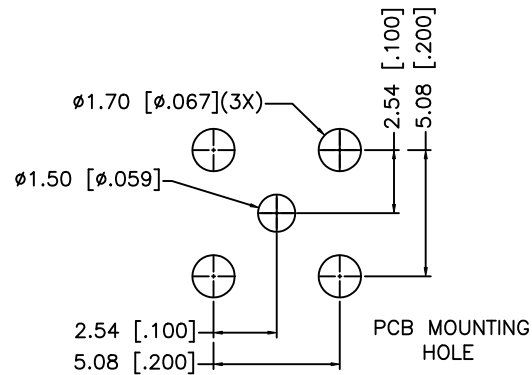

NOTE:

1. MAX. PANEL THICKNESS = 7.5mm

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex			
7						DRAWN		GRS		10/14/08			
6						CHECKED							
5	HEX NUT	BRASS	GOLD	1		ISSUED							
4	LOCK WASHER	BRASS	GOLD	1		SHEET		1 OF 1					
3	CONTACT PIN	BER. COPPER	GOLD	1	DO NOT SCALE DRAWING CAD FILE C:/132/132291-12.DWG					PART DESCRIPTION			
2	INSULATOR	PTFE	NATURAL	1						SMA BULKHEAD P.C. MOUNT JACK			
1	BODY	BRASS	GOLD	1						PART NO. 132291-12			
	DESCRIPTION	MATERIAL	FINISH	QTY						DWG. NO. 132291-12.DWG			
										REV. A SIZE A SCALE NA			