






EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.






Rating	16A 125VAC, 10A 250VAC 	Mounting Hole	
	10(4)A 250V~ 		
Contact Resistance	50m ohm Max.	Thickness: 1.5~2.5	
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	3P SPST ON-OFF(Illuminated)		

***MATERIAL:**

Frame: Nylon 66, Black
 Actuator: PC, Blue Clear
 Waterproof rubber: Silicone
 Hot Stamping: None
 Waterproof: IP65



Circuit Diagram

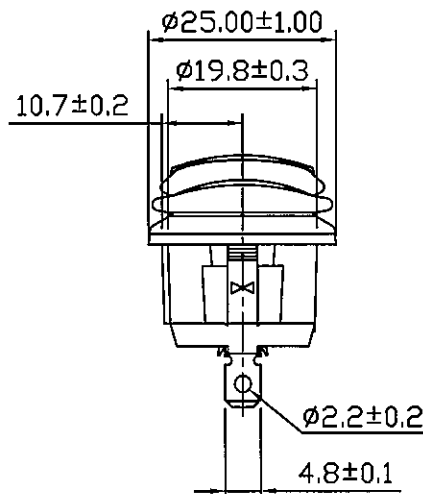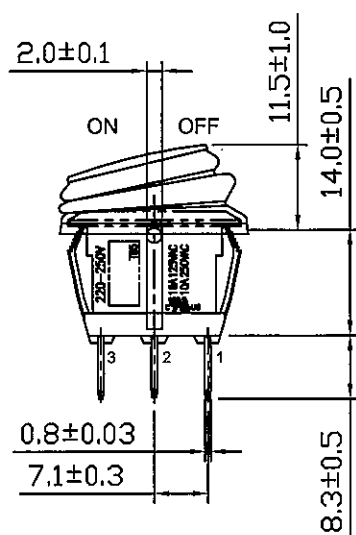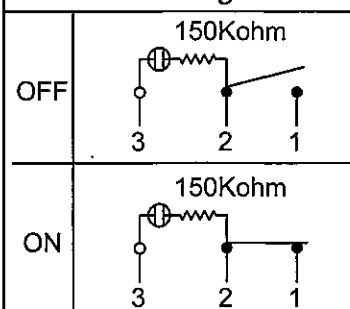

C8/R13/R13-112B8-02

								△	
								△	
Date		Name		Description				NO	
Drawn	Checked	Approved	SCI BOM NO.	1825628		Model Name	ROCKER SWITCH		
曹盈芳			Customer No.			Model No.	R13-112B8-02		Rev
04/09/13		4/10/13	Unit	mm	 Shin Chin Industrial Co., Ltd.			0	