



**EN:** This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## Plug-in sockets and accessories


### EC 35

For RM87N, RM87N sensitive, RM92


For PCB  
31,3 x 12,7 x 9 mm  
One pole, 3,5 mm pinout  
12 A, 300 V AC



#### Pinout



#### Dimensions




### GD35

For RM87N, RM87N sensitive, RM92


For PCB  
31,5 x 13 x 9 mm  
One pole, 3,5 mm pinout  
12 A, 300 V AC



#### Pinout




#### Dimensions

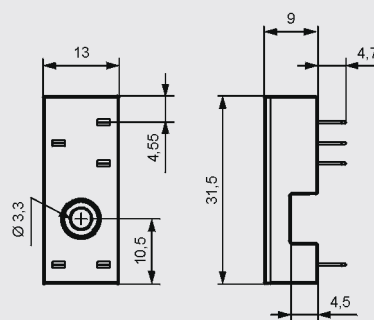




### ES 32

For RM96 1 CO


Screw terminals  
Max. tightening moment  
for the terminal: 0,7 Nm  
35 mm rail mount  
acc. to PN-EN 60715 or on panel  
mounting  
75 x 15,5 x 42,5(59) mm ②  
One pole, 3,2 mm pinout  
12 A, 300 V AC



#### Connection diagrams




#### Dimensions

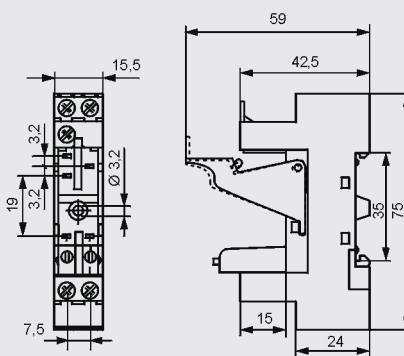


### EC 32


For PCB  
31 x 12,7 x 9 mm  
One pole, 3,2 mm pinout  
12 A, 300 V AC



#### Pinout



#### Dimensions



① Mounting and sub-assemblies of accessories in the socket - see page 9. Signalling / protecting modules type M... - see page 20.  
② In the bracket the height of socket with retainer / retractor clip is shown.