EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

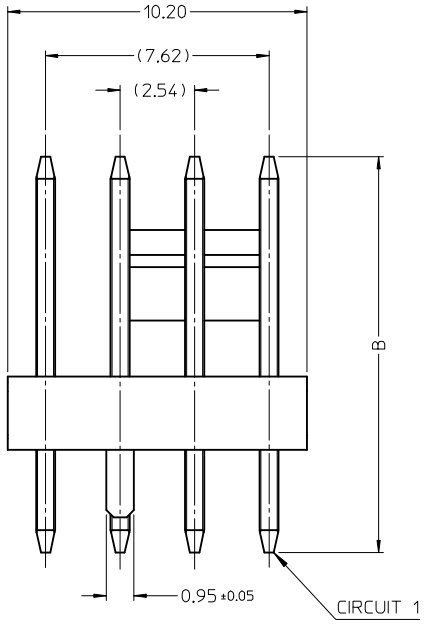

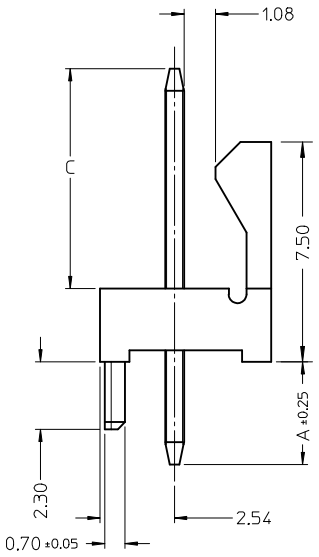

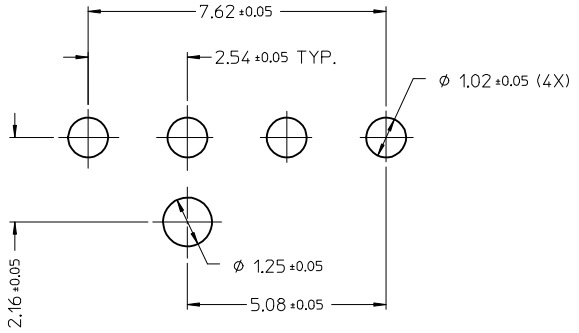

RECOMMENDER PCB LAYOUT

P/N \ DIM	A	B	C
47053-1000	3.50	13.50	7.50
47053-3000	4.00	13.84	7.34

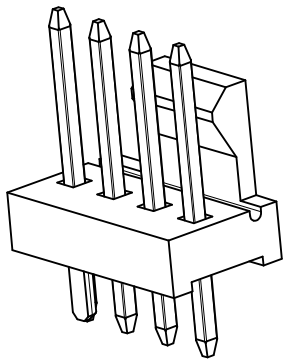

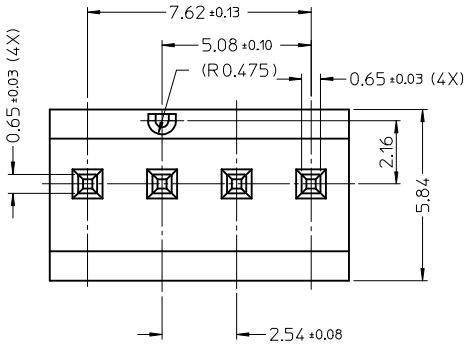

NOTES:
1. MATERIAL: HOUSING: NYLON, UL94V-0. COLOR: IVORY.
   PIN: COPPER ALLOY.
2. PLATING: 0.00254 MIN. MATTE TIN OVER 0.00127 MIN. NICKEL
3. PIN PUSH OUT FORCE: 0.91Kgf.
4. PARTS CONFORM TO PRODUCT SPEC PS-47053-001.
5. SOLDERABILITY: PER SMES-152
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002

ADD 7.50 DIMENSION
EC NO: UCP2013-1809
DRWN:MMSTROH 2012/11/06
CH'KD:MKIPPER 2012/11/06
APPR:FSMITH 2012/11/06
DESCRIPTION
REV
C1

QUALITY SYMBOLS
FA=0
FV=0
FP=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.2	± ---
1 PLACE	± 0.25	± ---
0 PLACE	±	±

ANGULAR ± 3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: RZHANG DATE: 2003/10/31
CHECKED BY: HJYIN DATE: 2003/10/31
APPROVED BY: SHUANG DATE: 2003/10/31

TITLE: 4 PIN HEADER HOUSING WITH FRICTION LOCK

molex

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-47053-001
SHEET NO.: 1 OF 1
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION