



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

- **Highly cost efficient design**
- **Pin compatible with LMxx linear regulators**
- **Operation temperature. range -40°C to +85°C**
- **Efficiency up to 92%**
- **Wide input operating range 6-36 VDC**
- **Short circuit protection**
- **Excellent line / load regulation**
- **3-year product warranty**



The TSR 1E is a 1 Ampere step-down switching regulator series and a drop-in replacement for inefficient 78xx linear regulators. This series comes in a standard plastic SIP-3 case and complements our existing POL portfolio with a series focusing strongly on a cost efficient design while maintaining our quality standards. The effective design allows full load operation up to +60°C ambient temperature without the need of any heat sink or forced cooling. The TSR 1E switching regulators provide other significant features over linear regulators, i.e. better output accuracy, lower standby current and no requirement of external capacitors. The TSR 1E series offers a broad application range in many environments and is especially suited for high volume projects where the series will help to reduce production cost by delivering not only a highly cost efficient but also reliable solution.

Models

Order Code	Output Current max.	Input Voltage Range	Output Voltage nom.	Efficiency typ.
TSR 1-2433E	1'000 mA	6 - 36 VDC (24 VDC nom.)	3.3 VDC	88 %
TSR 1-2450E		7 - 36 VDC (24 VDC nom.)	5 VDC	92 %

Input Specifications

Recommended Input Fuse	(The need of an external fuse has to be assessed in the final application.)
Input Filter	Internal Capacitor

Output Specifications

Voltage Set Accuracy	±4% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (10 - 100%) 0.75% max. 1.5% max.
Ripple and Noise	- 20 MHz Bandwidth 80 mVp-p typ.
Capacitive Load	1'000 µF max.
Minimum Load	Not required
Temperature Coefficient	±0.03 %/K max.
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	350% max. of Iout max.

EMC Specifications

EMI Emissions	- Conducted Emissions - Radiated Emissions	EN 55032 class B (with external filter) EN 55032 class B (with external filter)
		External filter proposal: www.tracopower.com/overview/tsr1e

General Specifications


Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	-40°C to +85°C +105°C max. -50°C to +125°C
Power Derating	- High Temperature	4.17 %/K above 61°C
Over Temperature Protection Switch Off	- Protection Mode	150°C typ. (Latch off)
Cooling System		Natural convection (20 LFM)
Switching Frequency		520 kHz typ. (PWM)
Insulation System		Non-isolated
Reliability	- Calculated MTBF	7'000'000 h (MIL-HDBK-217F, ground benign)
Housing Material		Plastic (UL 94 V-0 rated)
Pin Material		Phosphor Bronze (C5191)
Pin Foundation Plating		Nickel (1 µm min.)
Pin Surface Plating		Tin (3 µm min.), bright
Connection Type		THD (Through-Hole Device)
Weight		1.6 g
Environmental Compliance	- Reach - RoHS	www.tracopower.com/info/reach-declaration.pdf www.tracopower.com/info/rohs-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)	www.tracopower.com/overview/tsr1e
--	--

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

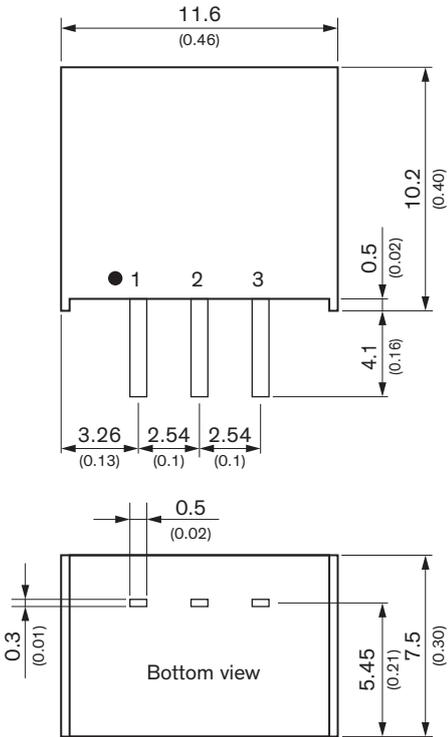

Pinout	
Pin	Function
1	+Vin
2	GND
3	+Vout

Dimensions in mm (inch)
 Tolerances: x.x ±0.5 (±0.02)
 x.xx ±0.25 (±0.01)