**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

SIEMENS

## Data sheet 3SU1550-0AA10-0AA0

HOLDER FOR 3 MODULES, METAL



Figure similar

| | |
|---|---|
| **product brand name** | SIRIUS ACT |
| **Product designation** | Commanding and signaling devices |
| **Design of the product** | Holder |
| **Manufacturer article number** | |
| • of the supplied holder | 3SU1550-0AA10-0AA0 |

| Actuator: | |
|---|---|
| **Design of the operating mechanism** | 3-way without module |
| **Number of contact modules** | 0 |

| Holder: | |
|---|---|
| **Material of the holder** | Metal |

| Display: | |
|---|---|
| **Number of LED modules** | 0 |

| General technical data: | |
|---|---|
| **Product function** | |
| • positive opening | No |
| **Product component** | |
| • diode | No |
| • lamp transformer | No |
| • Light source | No |
| • series resistor | No |
| **Insulation voltage** | |
| • Rated value | 500 V |
| **Degree of pollution** | 3 |
| **Shock resistance** | |


Changes preserved
© Copyright Siemens AG

| | |
|---|---|
| • acc. to IEC 60068-2-27 | Sinusoidal half-wave 50 g / 11 ms |
| **Vibration resistance** | |
| • acc. to IEC 60068-2-6 | 10 ... 500 Hz: 5g |
| **Surge voltage resistance Rated value** | 6 kV |
| **Mechanical service life (switching cycles)** | |
| • typical | 10 |
| **Equipment marking** | |
| • acc. to DIN EN 61346-2 | U |
| • acc. to DIN EN 81346-2 | U |

## Auxiliary circuit:

| | |
|---|---|
| **Number of NC contacts** | |
| • for auxiliary contacts | 0 |
| **Number of NO contacts** | |
| • for auxiliary contacts | 0 |
| **Number of CO contacts** | |
| • for auxiliary contacts | 0 |

## Connections/ Terminals:

| | |
|---|---|
| **Tightening torque** | |
| • for grounding | 0.8 ... 1 N·m |

## Ambient conditions:

| | |
|---|---|
| **Ambient temperature** | |
| • during operation | -25 ... +70 °C |
| • during storage | -40 ... +80 °C |

## Installation/ mounting/ dimensions:

| | |
|---|---|
| **Mounting type** | |
| • of modules and accessories | Front plate mounting |
| **Height** | 40 mm |
| **Width** | 30 mm |
| **Shape of the installation opening** | round |

## Certificates/ approvals:

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,…)**
http://www.siemens.com/industrial-controls/catalogs


**Industry Mall (Online ordering system)**
http://www.siemens.com/industrymall

**Cax online generator**
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU15500AA100AA0

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3SU15500AA100AA0

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU15500AA100AA0&lang=en


Changes preserved
© Copyright Siemens AG

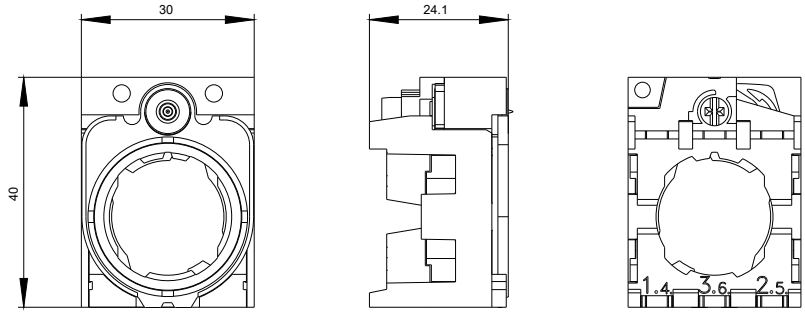


**last modified:** 27.04.2015


Changes preserved
© Copyright Siemens AG