
EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

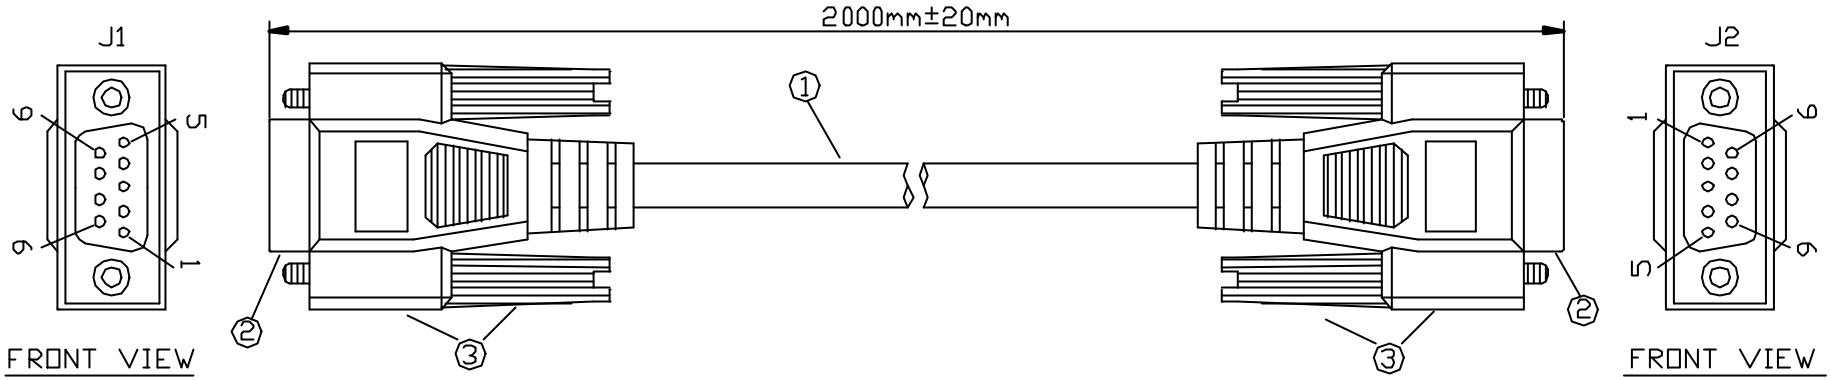

1.CABLE:NO UL.,28AWG(7/0.127),TINNED AND STRANDED COPPER WIRE
INSULATOR:PVC,ID:0.85mm ,CABLING:9C+DRAIN WIRE
SHIELD:AL/MY COVERAGE
JACKET:PVC,COMPLIANCE ROHS,COLOR:BEIGE,O.D:5mm
2.2PCS CONNECTOR::D-SUB 9 WAYS FEMALE SOLDER TYPE CONNECTOR
INSULATOR:P.B.T.+GLASS FIBER,COLOR:BLUE
CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATED
SHELL:NICKEL PLATED.
CONNECTOR COMPLIANCE ROHS
3.HOOD:PVC MOLDED TYPE WITH FOIL SHIELDED ON INNER
ON INNER MOLD AND INJECTION OUTER MOLD WITH
THUMB SCREW#4-40 UNC
COLOR:BEIGE,COMPLIANCE ROHS
4 Fulfill ROHS Guideline
5.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

PIN OUT

DB9PIN FEMALE(J1)	WIRE	DB9PIN FEMALE(J2)
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8
9		9
SHELL	DRAIN WIRE	SHELL

PART NO	CAB-09GG/2	SHEET NO	1
TITLE:	DB9 PIN FEMALE TO DB9 PIN FEMALE BEIGE COLOR,L:2M		
DWN NO	D-CAB-09GG/2		

THIRD ANGLE PROJECTION

SCALE	N.T.S	DRAWN BY & DATE
SIZE	A4	CHECKED BY & DATE
UNIT		
☑ MM ☐ INCH		APPROVED BY & DATE

BQ CABLE