EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

NOTES:

1. MATERIALS AND FINISHES:
   BODY,SHELL,RETAINING RING
   WASHER & FERRULE - BRASS, NICKEL PLATING
   CONTACT - BRASS, GOLD PLATING
   INSULATOR - PTFE, NATURAL
   RING - DELRIN, NATURAL
   GASKET - RUBBER, RED

2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM

3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: -65°C TO +165°C


4. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOL RF, 122108, AND DATE CODE"

5. CABLE ASSEMBLY INSTRUCTIONS:
   A. TRIM CABLE AS SHOWN.
   B. SLIDE FERRULE ONTO CABLE.
   C. CRIMP CONTACT TO CABLE CENTER CONDUCTOR WITH 0.068" HEX DIE
   D. CRIMP FERRULE WITH 0.213" HEX DIE.


6 SHOWS CABLE ENTRY DIMENSIONS.

THIRD ANGLE PROJ.


REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
A	MODIFY CONTACT PIN LENGTH 12.25 MM	23-Dec-02	--	--
C	Ø5.60 WAS Ø5.33, Ø6.50 WAS Ø6.48, NOTES & FORMAT UPDATED	09-Nov-16	2383	VK

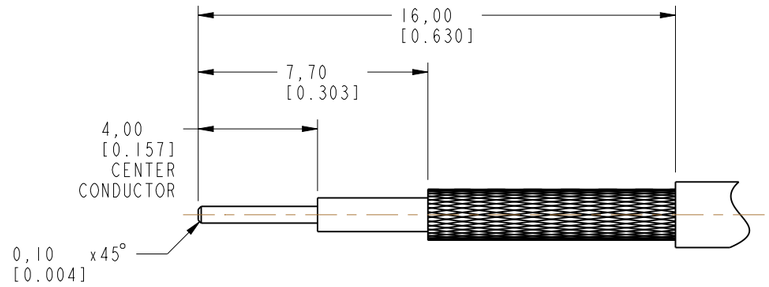

RECOMMENDED CABLE STRIPPING DIMENSIONS

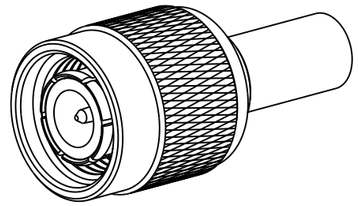

SCALE 2.000

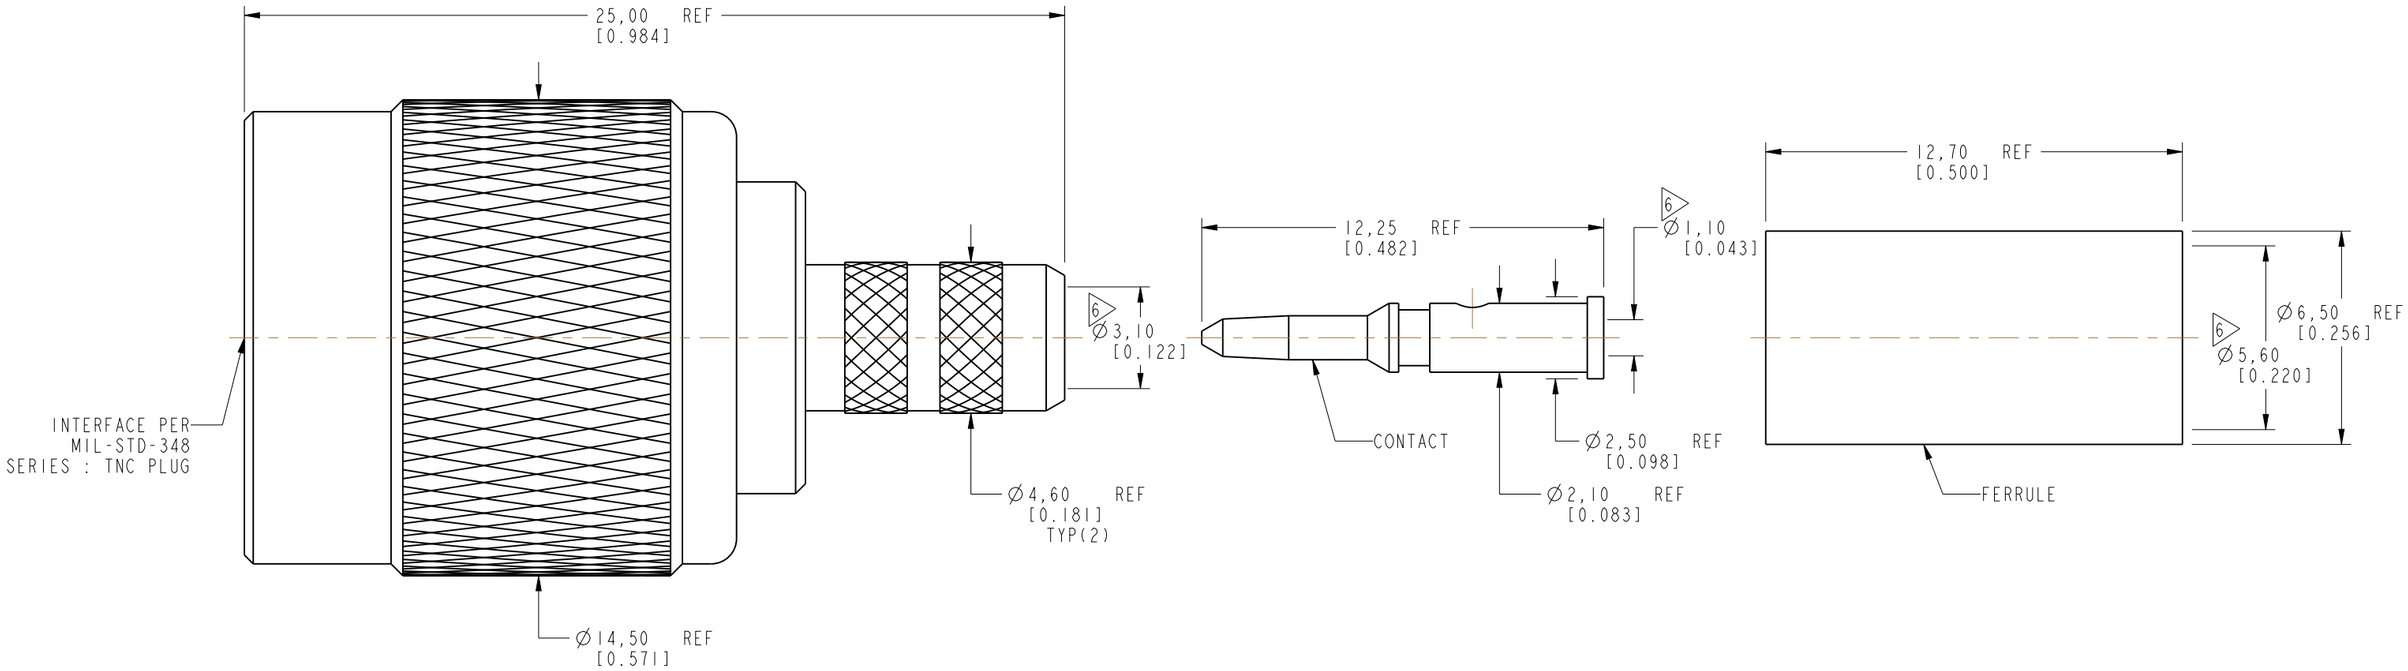

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

<0.5mm	0.5 - 6mm	6 - 30mm	30 - 120mm	ANGLES
± 0.05mm	±0.1mm	±0.2mm	± 0.3mm	±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL: SEE NOTES	DRAWN: VIJI K	DATE: 11-Oct-16	TITLE: TNC STR CRIMP PLUG FOR RG 58,58A,141 & LMR 195 CABLE
	ENGINEER: VIJI K	DATE: 11-Oct-16	
REFERENCE: EAR #	APPROVED: K.CAPOZZI	DATE: 09-Nov-16	SCALE: 6.0:1.0 SHEET 2 OF 2
CONFIGURATION LEVEL: In Work	CAD FILE		DWG SIZE: B REV: C
FINISH			

Amphenol RF
www.amphenolrf.com

DRAWING NO. 122108
ITEM NO. 122108
PART NO. 122108