




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

CELL CHARACTERISTICS

Capacity	Nominal	2,600 mAh 9.62 Wh
Cell Voltage	Nominal Charge Discharge	3.7 V 4.2 V 2.75 V
Continuous Charge Current	Standard Fast Charge	1.3 A 2.6 A
Charge Time	Standard Fast Charge	180 min 90 min
Continuous Discharge Current	Maximum	15 A
Internal Resistance	AC (1 KHz)	≤25 mΩ
Operating Temperature	Charge Discharge	0°C to 45°C -20°C to 60°C
Energy Density	Volumetric Gravimetric	566 Wh/L 208 Wh/kg

PHYSICAL CHARACTERISTICS

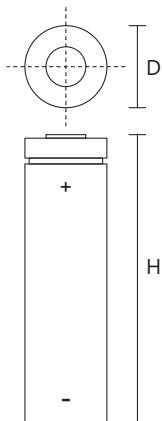


Shape	Cylindrical
Can	Steel
Diameter	18.6 mm (Max)
Height	65.1 mm (Max)
Weight	47 g (Max)




The information shown on this document is for descriptive purpose only. This document is not intended to make or imply any performance guarantee or a product warranty.

All specifications and characteristics shown herein are for REFERENCE ONLY, please check the latest version of the product specification for guidance. All specifications and characteristics shown herein are subject to change without prior notice and should be verified with a Tenpower representative or the nearest Tenpower recognized agent before placing an order.


DISCHARGE RATE CHARACTERISTICS

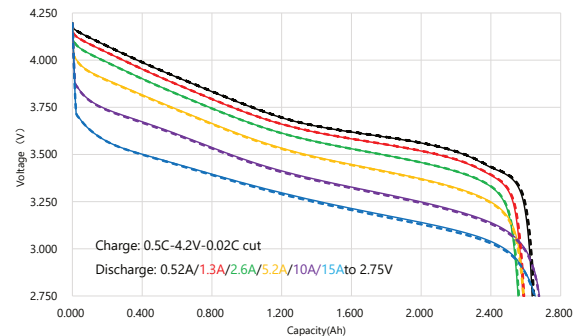

DISCHARGE TEMPERATURE CHARACTERISTICS

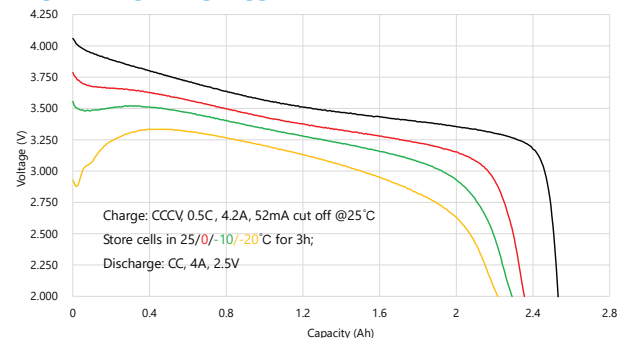

CYCLE LIFE CHARACTERISTICS@25°C

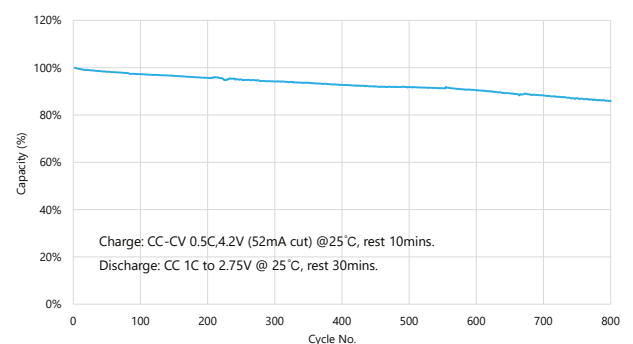

CYCLE LIFE CHARACTERISTICS@45°C

