EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

HIRSCHMANN® Test & Measurement
A BRAND OF SKS

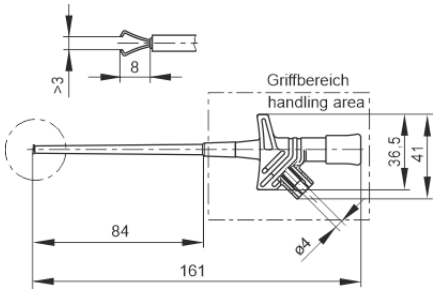
SKS Kontakttechnik GmbH

Clamp-type test probe



KLEPS 2600

CE

Product	KLEPS 2600
description	Safety clamp-type test probe with rotating grip jaws and flexible shaft. Wires and pins with up to a maximum diameter of 4mm can be clamped thanks to the special form of the grip jaws.4mm diameter brass socket connection.
operating instruction	BA457
article-no. / *colour	9723061xx ● 00 black ● 01 red
drawing	
	
technical data	
connection	unsprung socket 4 mm
rated voltage(1)	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current(1) (consider derating curve)	4 A
material plug	spring steel
material socket	brass
housing material	PBT
temperature range acc. To IEC61010(2)	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamp type	rotating grip jaws, tin plated

4 mm safety system

clamping range	4 mm
standard	IEC 61010

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
stand: 10.01.2019