



HESTORE.HU

elektronikai alkatrész áruház




EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Clamp-type test probe

KLEPS 2700

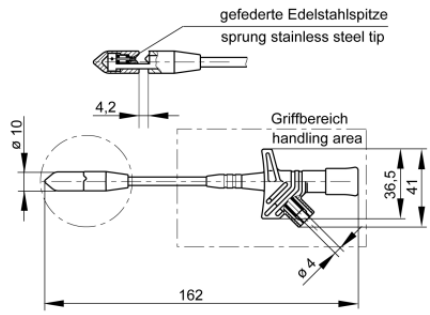

Product	KLEPS 2700
description	Clamp-type test probe with split test clamp. The sprung stainless steel tip can contact insulated leads with cross-sections between 0.25 mm ² and 1.5 mm ² (3.5 mm diameter) without the need to strip them. 4 mm diameter brass socket connection.
operating instruction	BA408
article-no. / *colour	9723071xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div>
drawing	
technical data	
connection	unsprung socket 4 mm
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	10 A
material plug	stainless steel, nickel plated
material socket	brass
housing material	PBT
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	HB

4 mm system

clamp type	stainless steel tip
clamping range	3,5 mm
standard	IEC 61010

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains

stand: 17.09.2018