EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

HIRSCHMANN® Test & Measurement
A BRAND OF SKS

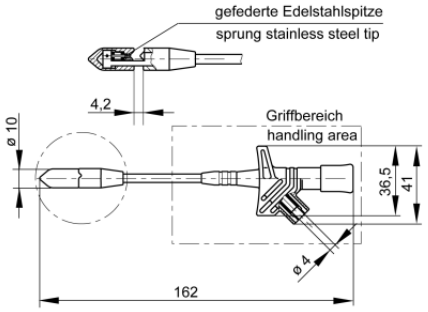
SKS® SKS Kontakttechnik GmbH

Clamp-type test probe

KLEPS 2700



CE

Product	**KLEPS 2700**
description	Clamp-type test probe with split test clamp. The sprung stainless steel tip can contact insulated leads with cross-sections between 0.25 mm² and 1.5 mm² (3.5 mm diameter) without the need to strip them. 4 mm diameter brass socket connection.
operating instruction	BA408
article-no. / *colour	9723071xx ● 00 black ● 01 red
drawing	
	
technical data	
connection	unsprung socket 4 mm
rated voltage[1]	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O [3]
rated current[1] (consider derating curve)	10 A
material plug	stainless steel, nickel plated
material socket	brass
housing material	PBT
temperature range acc. To IEC61010[2]	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

4 mm system

clamp type	stainless steel tip
clamping range	3,5 mm
standard	IEC 61010

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 17.09.2018