EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS® SKS Kontakttechnik GmbH

Measuring leads

MAL N 4-0,64/100-0,25



CE

Product	**MAL N 4-0,64/100-0,25**
description	Injection-moulded measuring lead with sprung 4 mm diameter plug and 4 mm diameter socket for further connection and insulated socket for 0.64 mm round pillar and 0.64 mm rectangular pillar. Highly flexible 0.25 mm² stranded wire.
operating instruction	BA001
article-no. / *colour	9341601xx ● 00 black ● 01 red
drawing	
	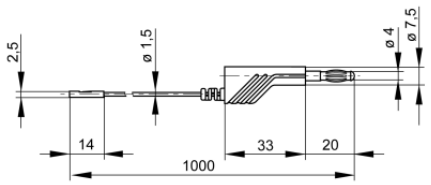
technical data	
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	3 A
material socket	contact pin: brass contact spring / contact socket: copper - beryllium
housing material	PVC / PPO
temperature range acc. To IEC61010(2)	-15 °C to +70 °C
cable length	100 cm
conductor size	0,25 mm²
cable material	PVC
contact resistance	70 mOhm
standard	IEC 61010

0.64 mm system

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 25.09.2018