



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



RAYEX ELEC.

LB SERIES

FEATURES

- High performance power relay
- PCB terminal and solder lug terminal and flanged case are available
- LED version is available
- UL, CUL, TUV, and CE approved
- Using at control equipment, vending machines, cooking appliances, office machine, domestic appliances, etc.



UL FILE NO.: E131959
 CUL FILE NO.: E131959
 TUV FILE NO.: R09956267

ORDERING INFORMATION

LB1 N ——— 12 D F S
 1 2 3 4 5 6

1. Type

- LB1(1PDT) : 15A
- LB2(2PDT) : 12A
- LB2H(2PDT) : 10A
- LB4H(4PDT) : 5A

2. LED

- Nil : Without LED
- N : With LED

3. Coil Nominal Voltage

- 4. Coil Nominal Voltage Type
- D : DC
- A : AC

5. Cover Type

- Nil : Standard Type
- F : Flange Cover
- T : Test button

6. Terminal Type

- S : Solder Lug / Plug-In Terminal
- P : PCB Terminal

COIL DATA(at 25°C)





AC 1.2VA				DC 0.9-1.1W				
Coil Nominal Voltage (50/60Hz)	Resistance Tol.±10% (Ohms)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)	Coil Nominal Voltage (VDC)	Resistance Tol.±10% (Ohms)	Nominal Current (mA)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)
6	10	4.8	1.8	6	40	150	4.5	0.6
12	45	9.6	3.6	12	160	75	9.0	1.2
24	160	19.2	7.2	24	650	37	18.0	2.4
48	670	38.4	14.4	48	2,600	19	36.0	4.8
100/110	3,900	88.0	33.0	100/110	11,000	9	82.5	11.0
220/240	16,000	176.0	66.0					

CONTACT RATING

LB1 TYPE	Resistive (Cos.θ = 1)	AC 240V / DC 30V	15A	UL
		AC 240V / DC 24V	15A	TUV
	Inductive (Cos.θ = 0.4)	AC 240V	8A	TUV
LB2 TYPE	Resistive (Cos.θ = 1)	AC 240V / DC 30V	12A	UL
		AC 240V / DC 24V	10A	TUV
	Inductive (Cos.θ = 0.4)	AC 240V	5A	TUV
LB2H TYPE	Resistive (Cos.θ = 1)	AC 240V / DC 30V	10A	UL
		AC 240V / DC 24V	10A	TUV
	Inductive (Cos.θ = 0.4)	AC 240V	5A	TUV
LB4H TYPE	Resistive (Cos.θ = 1)	AC 240V / DC 30V	5A	UL
		AC 240V / DC 24V	5A	TUV
	Inductive (Cos.θ = 0.4)	AC 240V	3A	TUV





DIMENSIONS(±0.2mm)

LB1

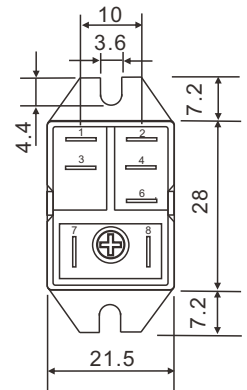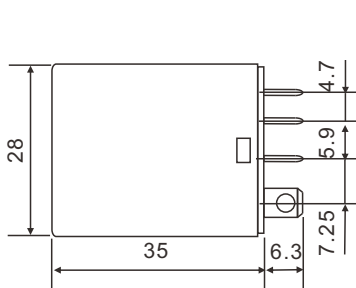

Flange Cover





LB2-(T)

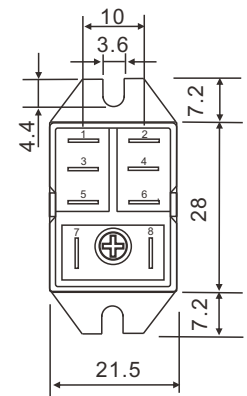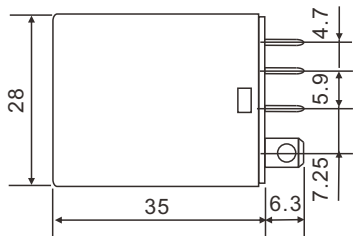





DIMENSIONS(±0.2mm)

Flange Cover

LB2H-(T)

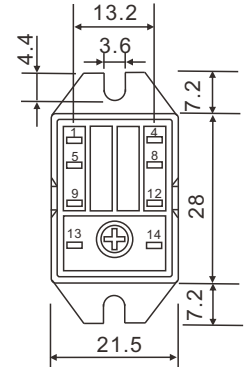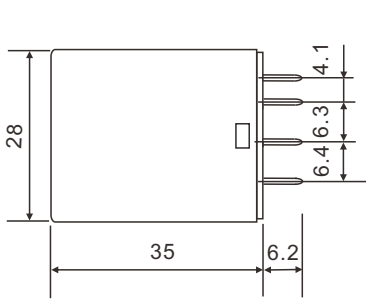


LB4H-(T)

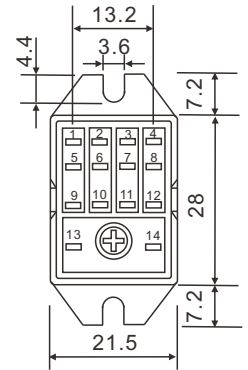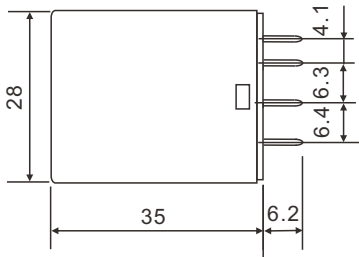


DRILLING PLAN


LB1




LB2



LB2H




LB4H




WIRING DIAGRAM


LB1




LB2



LB2H






LB4H



TERMINAL TYPE(±0.2mm)

SOLDER LUG/PLUG-IN

PRINTED CIRCUIT



LB1, LB2

LB2H, LB4H

GENERAL DATA

Insulation Resistance	1,500 MΩ Min. (DC 500V)
Dielectric Strength	750 VAC, 50/60Hz between contact.
	1,500 VAC, 50/60Hz between all elements.
Contact Material	Agcdo Alloy.
Contact Resistance	100 milliohms max. (initial value)
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
	Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	15 ms max.
Release Time	15 ms max.
Temperature Range	- 40°C ~ + 60°C
Expected Life	With operation rate 30/min.
	Mechanical - 10,000,000 operations min.
	Electrical - 100,000 operations min. at rated load.
Weight	37 grams