



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 9 circuits
- Other plating options available

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5197-N housing
 Designed In: Millimeters

Electrical

Voltage: 250V
 Current: 7.0A
 Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 MΩ min.


Physical

Housing: 6/6 nylon, UL 94V-2
 Contact: Brass, 1.14mm (.045") square
 Plating: Tin
 Operating Temperature: -40 to +105°C


molex® 5.08mm (.200") Pitch
SPOX™
Header

5281-NA

**Vertical
 Friction Lock**



CATALOG DRAWING (FOR REFERENCE ONLY)

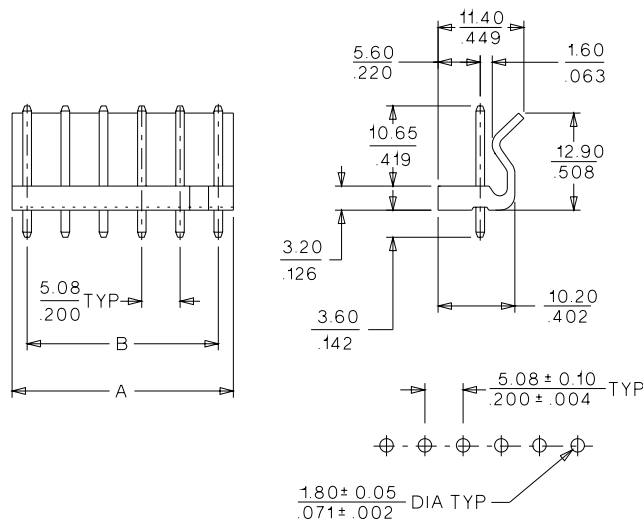

PCB LAYOUT: COMPONENT SIDE
 RECOMMENDED PCB THICKNESS: 1.60 ± 0.10 / .063 ± .004

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	10-32-1021	9.08 (.357)	5.08 (.199)
3	10-32-1031	14.16 (.557)	10.16 (.399)
4	10-32-1041	19.24 (.757)	15.24 (.599)
5	10-32-1051	24.32 (.957)	20.32 (.799)
6	10-32-1061	29.40 (1.157)	25.40 (1.000)
7	10-32-1071	34.48 (1.357)	30.48 (1.199)
8	10-32-1081	39.56 (1.557)	35.56 (1.399)
9	10-32-1091	44.64 (1.757)	40.64 (1.599)

D
 3.00 to 7.92mm (.118 to .312") Pitch