



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## DC power extension cable Socket 2.1/5.5 | straight plug 2.1/5.5 2×0.52 mm<sup>2</sup> AWG20 | KP216-211-213-xxxx

High-quality low-voltage power cable with a DC Jack connector designed for installation in OEM devices, for repair or service purposes, home automation systems, and consumer electronics. The plastics used ensure durability and flexibility over a wide operating temperature range, while the copper conductors ensure low voltage drop and good electrical contact. Available in a variety of versions, allowing to choose the optimal solution for every application.



### CABLE DESIGN

The cable is manufactured using hot-melt plastic potting, which guarantees mechanical durability and environmental protection. The class 5 stranded copper wire has bare ends and tin-plated terminals for easy installation. The wire connected to the socket center pin is marked with a colored stripe.


### CONSTRUCTION

Nickel-plated brass DC Jack plug, hot-moulded with PVC. The flat cable is PVC-insulated, two-conductor with a copper strand. The wire connected to the plug center pin is marked with a stripe. The cable end is stripped and tinned with lead-free SnCu07 solder.

### TECHNICAL SPECIFICATION

Group	Parameter	Value	Notes
Product	Cable type	DC extension cable, socket 2.1/5.5 – straight plug 2.1/5.5, 2×0.52 mm <sup>2</sup> AWG20	
	Version	DC extension cable	Hot-molded plastic
	Model	KP216-211-213	
	Type	Flat	Plus wire marked by color
	Intended use	DC power supply	Indoor use
	Cable length	1.5 m   3.0 m   5.0 m   10.0 m	See the „L” parameter in the figure below
	Plug color	Black	
	Wire color	Black	
	Ambient temperature range	-25 to +70°C	
	Certification	CE, RoHS, REACH	
	Warranty	5 years	
	Packaging	100 pcs	
	Country of manufacturing	Poland	
Left side	Type	Socket 2.1/5.5 mm DC Jack	Nickel-plated
	Wire connection	Soldered with lead-free SnCu07	
Right side	Design	Straight plug 2.1/5.5 mm DC Jack	
	Installation	Wire marked with a stripe connected to the plug pin	
Wire	Number of wires in the cable	2	Flat cable, construction as shown
	Wire cross-section	UL2468 AWG 20	0.52 mm <sup>2</sup>
	Wire structure	30×0.18 mm <sup>2</sup> or 24×0.20 mm <sup>2</sup>	
	Wire material	Stranded copper wire	Class 5 copper
	Wire resistance	20 mΩ/m	
	Outer cable dimensions	3.5×2 mm	±0.5 mm
	Cable insulation material	PVC (polyvinyl chloride)	
	Maximum operating voltage	60 V	
Maximum rated current	3 A		

### TECHNICAL DRAWING

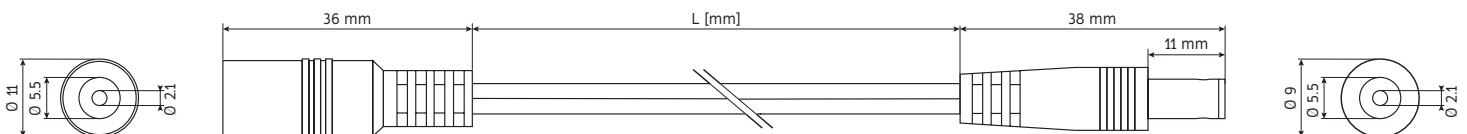

### OPTIONS

Left side	Cable length	Cable type	Right side	Product index	EAN code
DC socket 2.1/5.5	1.5 m	DC power cable, AWG20, 2×0.52 mm <sup>2</sup>	Straight plug 2.1/5.5	KP216-211-213-0150	5904139614976
	3.0 m			KP216-211-213-0300	5904139614822
	5.0 m			KP216-211-213-0500	5904139614839
	10.0 m			KP216-211-213-1000	5904139614990