



HESTORE.HU


elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.



DC Power Cable 5m long
Socket 2.5x5.5 mm
 flexible, multiwire conductors,
 stranded of bare copper wires
2x0.75mm²

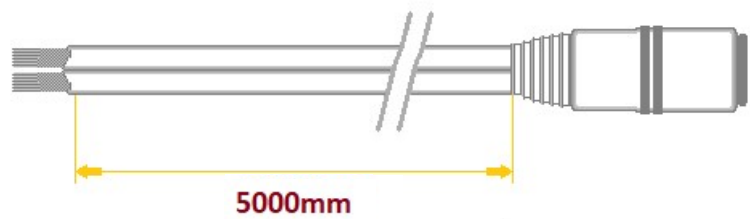

Model	S25-TT-T075-500BK
DC Plug (output)	tinned terminals
DC Socket (input)	2.5x5.5mm , (round plug, outer diameter 5.5mm, inner diameter 2.5mm)
Construction	flexible, multiwire conductors, stranded of bare annealed copper wires
Cable cross section	2.3 x 4.8mm
Wire diameter	2x0.75mm²
Nominal voltage	0-100V
Rated current	2.3A
Length	500cm
Jacket	PVC
Color	Black
Inner conductor	Cu
Insulation resistance	>100MΩ @ 500VDC
Insulation thickness	0.4mm
Allowable operation temperature	-20°C to 70°C
Maximum wire resistance	26 Ω/km @ 20°C

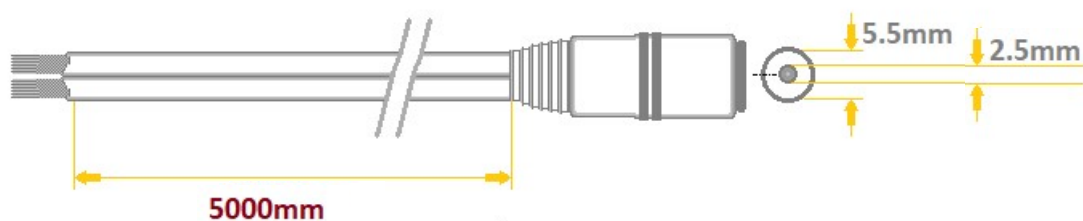

Marking System

model:

S25-TT-T075-500BK

1	2	3	4	5	6	7	8		
S	25	-	T T	-	T	075	-	500	BK

1	Input / Output (side 1)	<p>P - straight plug</p> <p>A - angled plug</p> <p>S - socket</p>
2	Plug / Socket dimensions (side 1)	<p>07 - 0.7mm / 2.35mm</p> <p>13 - 1.3mm / 3.5mm</p> <p>40 - 1.7mm / 4.0mm</p> <p>48 - 1.7mm / 4.8mm</p> <p>55 - 1.7mm / 5.5mm</p> <p>21 - 2.1mm / 5.5mm</p> <p>25 - 2.5mm / 5.5mm</p>
3	Input / Output (side 2)	<p>P - straight plug</p> <p>A - angled plug</p> <p>S - socket</p>
4	Plug / Socket dimensions (side 2)	<p>T - tinned terminals</p> <p>07 - 0.7mm / 2.35mm</p> <p>13 - 1.3mm / 3.5mm</p> <p>40 - 1.7mm / 4.0mm</p> <p>48 - 1.7mm / 4.8mm</p> <p>55 - 1.7mm / 5.5mm</p> <p>21 - 2.1mm / 5.5mm</p> <p>25 - 2.5mm / 5.5mm</p>
5	cable type	<p>C- YTLYek (coaxial)</p> <p>T- TLYP</p> <p>O- YTLY</p>
6	wire diameter	<p>035 - 0.35mm²</p> <p>050 - 0.5mm²</p> <p>075 - 0.75mm²</p> <p>100 - 1.0mm²</p>
7	length	<p>300 - 3000mm</p> <p>500 - 5000mm</p>
8	color	<p>BK - black</p> <p>WH - white</p> <p>TR - transparent</p>