



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



RMSD

Rework System with DT530

This Plug & Play Guide corresponds to the following references:

Ref.

RMSD-9QB (100 V)
RMSD-1QB (120 V)
RMSD-2QB (230 V)

Station

More Information on the
product web page



Packing List

The following items are included according to purchased station reference:



2-Tool Control Unit 1 unit
 Ref. DDE-9D (100 V)
 Ref. DDE-1D (120 V)
 Ref. DDE-2D (230 V)



Power Hot Air Control Unit 1 unit
 Ref. JTSE-9UA (100 V)
 Ref. JTSE-1UA (120 V)
 Ref. JTSE-2UA (230 V)



Electric Desoldering Module 1 unit
 Ref. MSE-B



General Purpose Handle 1 unit
 Ref. T245-A
(Cartridge not included)




Pick & Place Handle 1 unit
 Ref. T260-A



Angled Desoldering Iron 1 unit
 Ref. DT530-A



Heater Hose Set 1 unit
 Ref. JT-T1A (100 V / 120 V)
 Ref. JT-T2A (230 V)



JN Nozzles for JTT 3 units
 Ref. JN2012 1x
 Ref. JN2015 1x
 Ref. JN2020 1x



Stand for T210 & T245 1 unit
Ref. AD-SF



Stand for DT530 Angled Desoldering Iron 1 unit
Ref. DT-SB



Stand for JTT 1 unit
Ref. JT-SF



Magazine for Protectors and Extractors 1 unit
Ref. ESHT-A



Holder for Cartridges and Tips 1 unit
Ref. SCH-A




Kapton Tape 1 unit
Ref. PH217



Thermocouple Type K 1 unit
Ref. PH218


Installation

DDE 2-Tool Control Unit

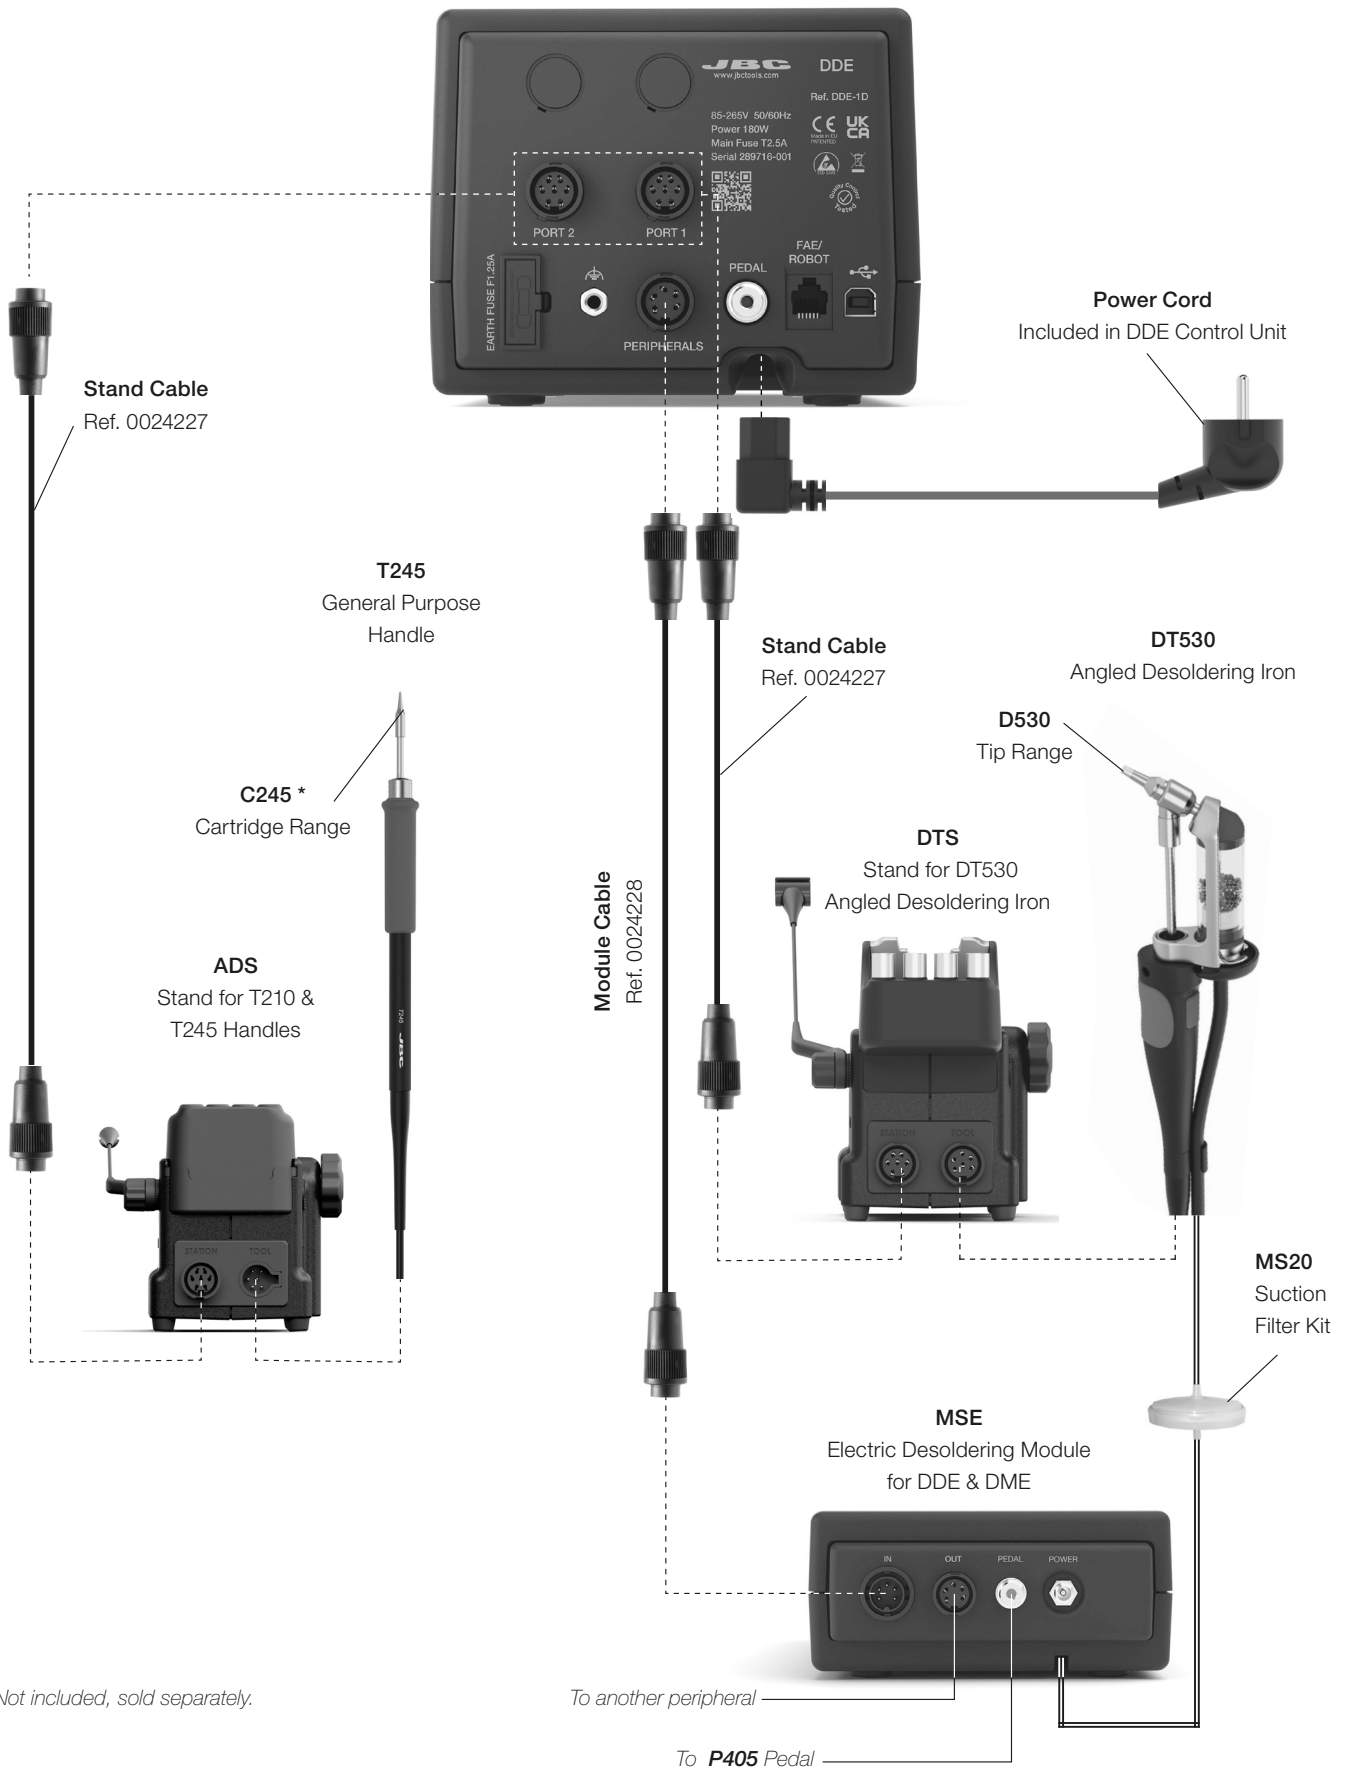

* Not included, sold separately.

Installation

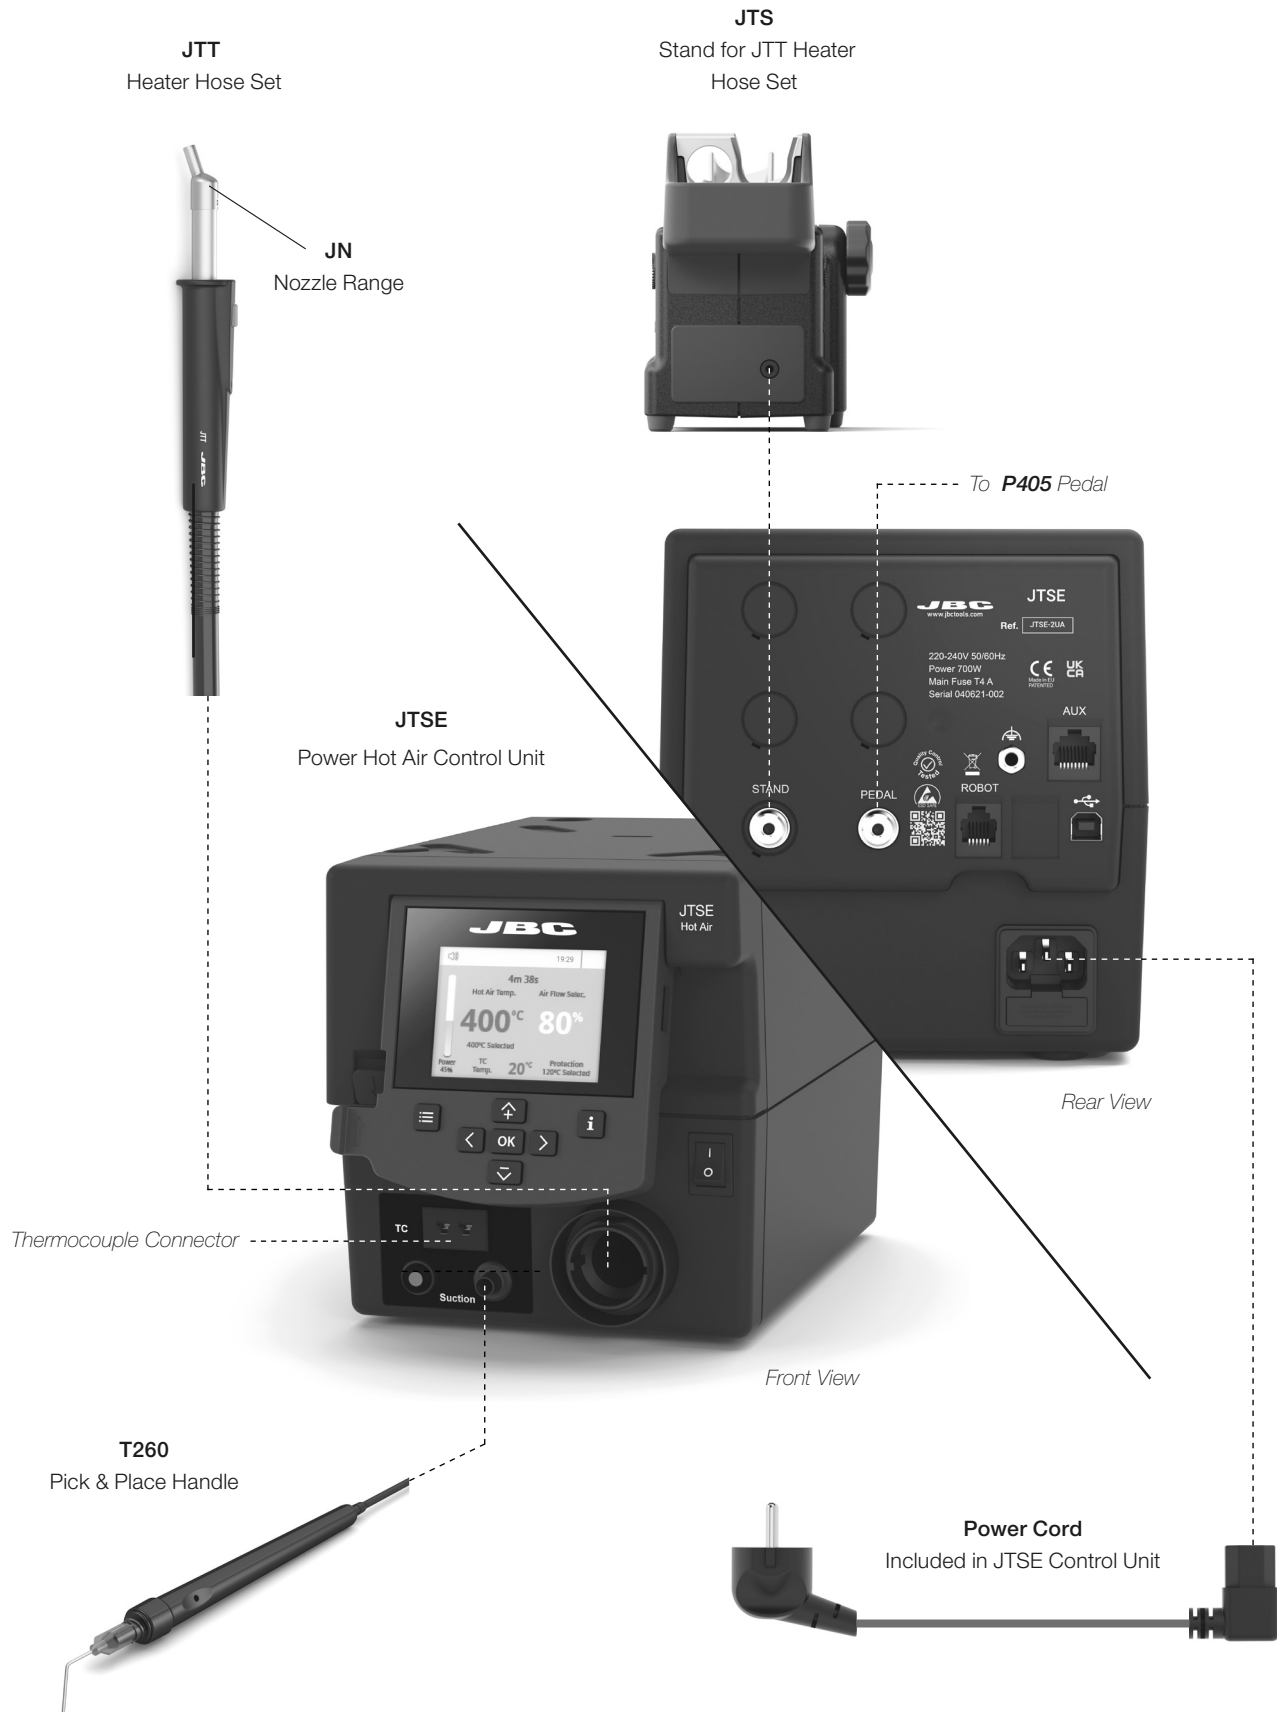

Specifications

RMSD

Rework System with DT530

Ref. **RMSD-9QB** (100 V)

Ref. **RMSD-1QB** (120 V)

Ref. **RMSD-2QB** (230 V)

- Package Dimensions / Weight:

(L x H x W)

615 x 368 x 637 mm / 17.49 kg

24.21 x 14.49 x 25.08 in / 38.57 lb

Complies with CE standards.

ESD safe.

JBC

Warranty

Information regarding the warranty of each product can be found on the final page of its instruction manual.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.