




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - TE Connectivity Ltd.		ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	ADDED -1 PER 0G3A-0179-99	28SEP99	-	JR
	E1	REVISED PER ECO-17-008806	16FEB2018	RS	DR

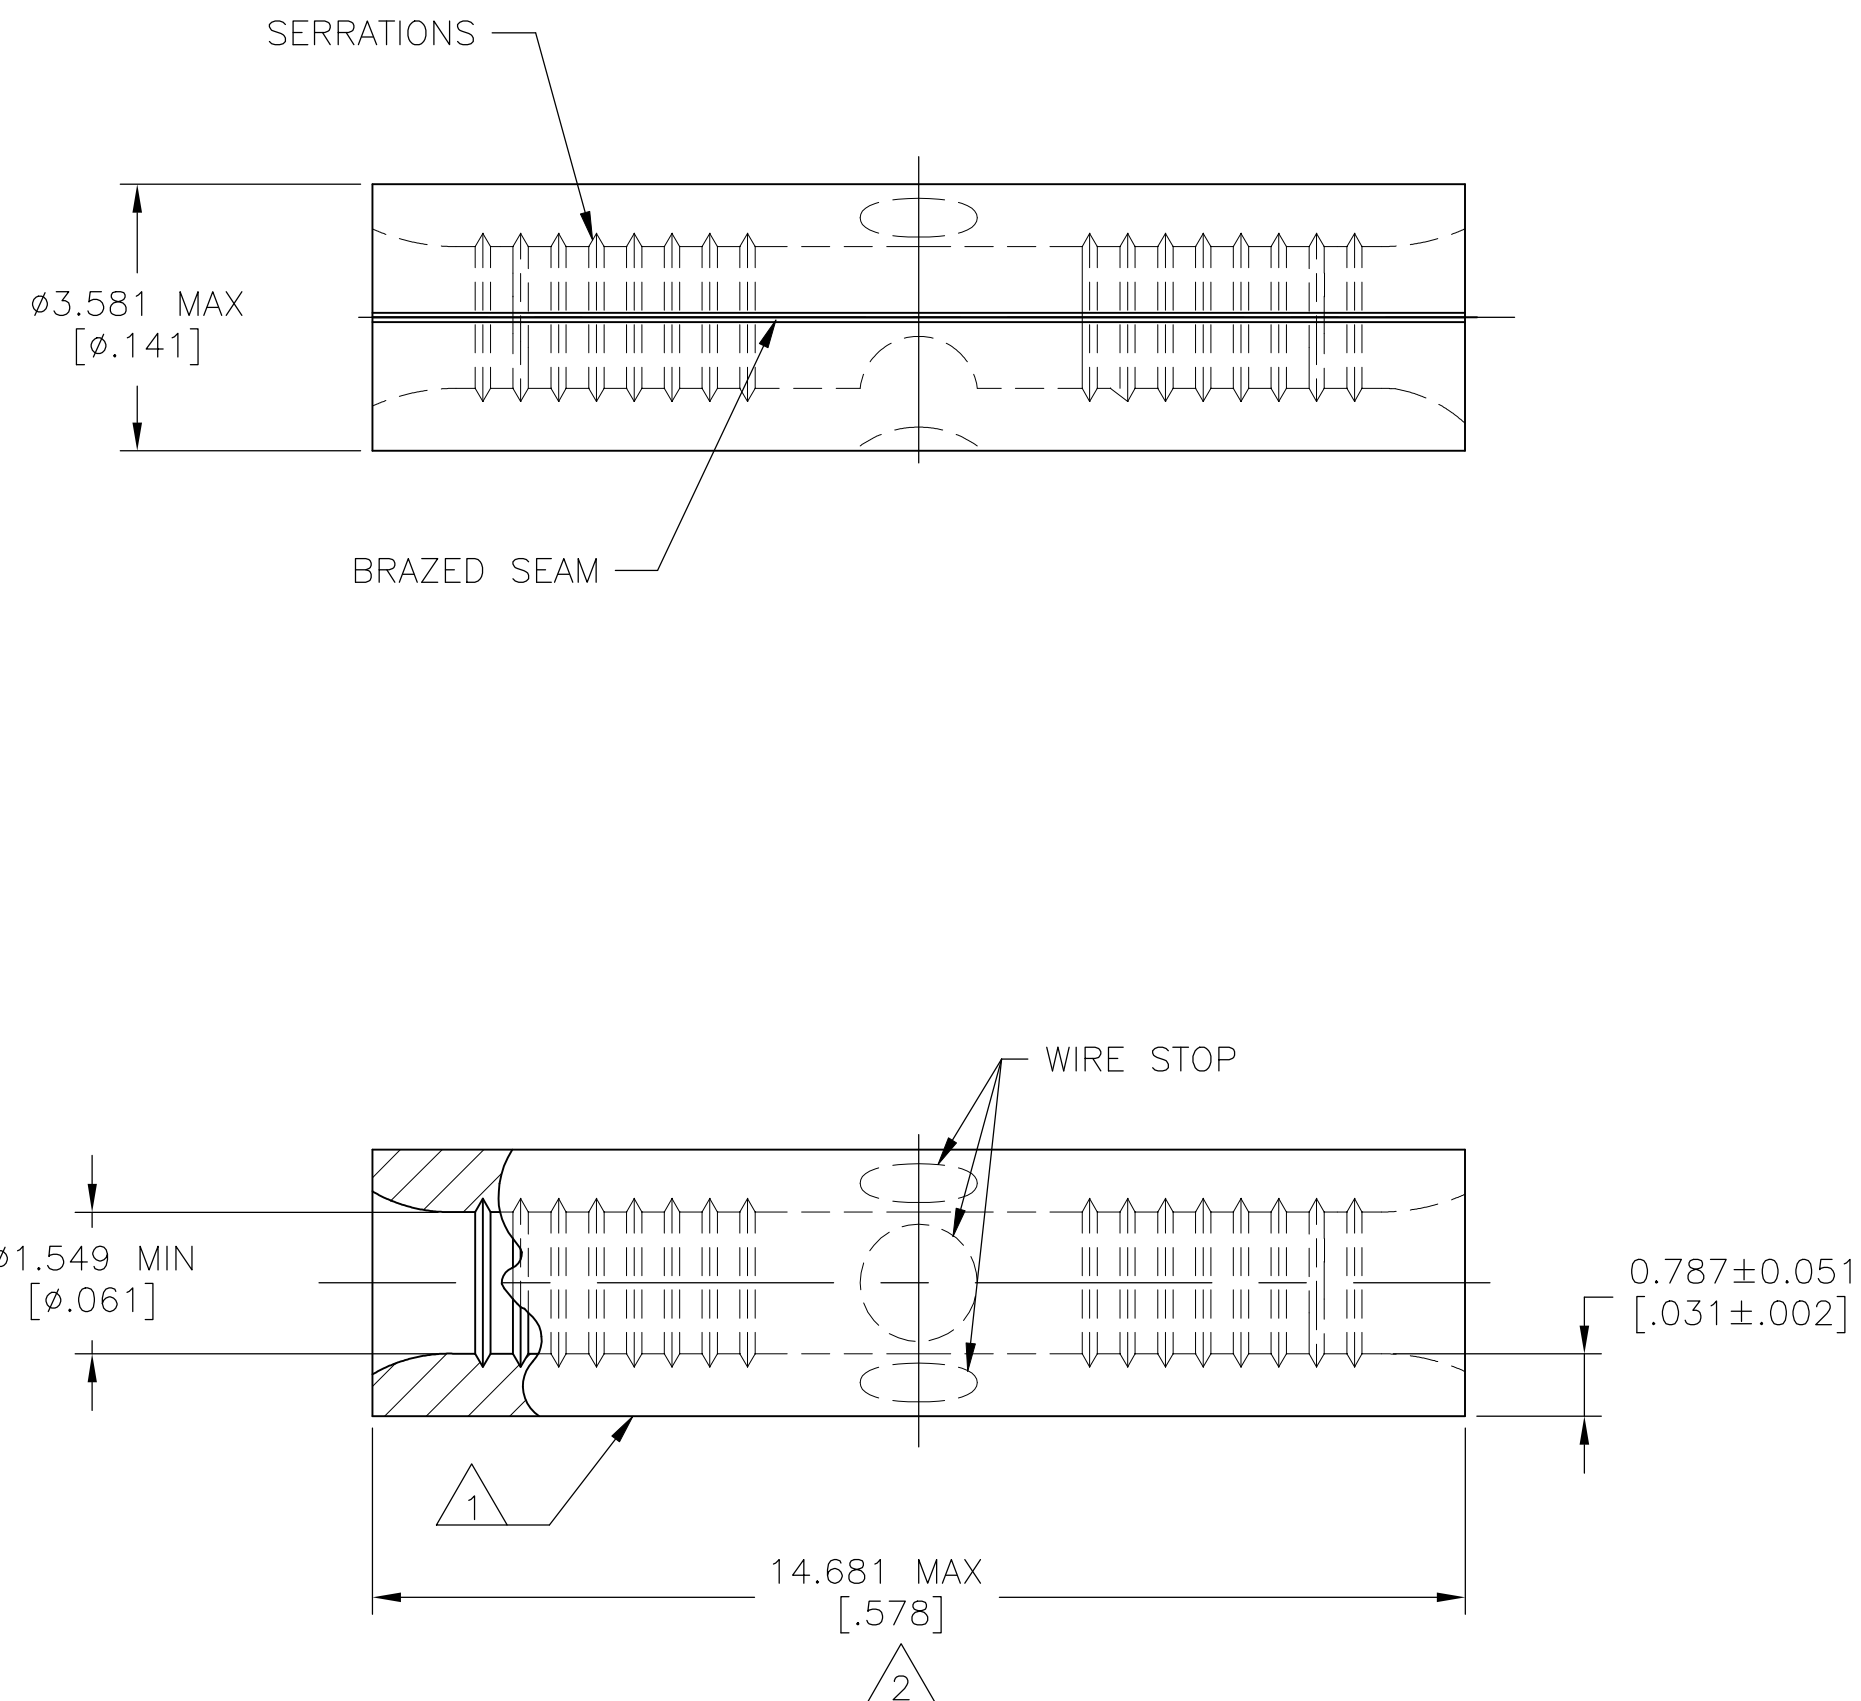

 AMP WIRE RANGE	 E13288 Listed
22-16 AWG SOLID OR STRANDED	NOT APPLICABLE

 LR7189 Certified	MILITARY P/N AND CLASS
NOT APPLICABLE	NOT APPLICABLE

- | | |
|---|---|
| 1 | STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
SAE AS7928, COMMERCIAL WIRE RANGE IS
22-16 |
| 2 | MAXIMUM LENGTH DOES NOT INCLUDE
MANUFACTURING TABS |
| 3 | NOTE DELETED |

1000	LOOSE PIECE	323796
QTY	PACKAGE TYPE	PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TA BRINKMAN CHK DA PATTERSON APVD DE MILLER 4-19-93 4-19-93 4-19-93		TE Connectivity Ltd.				
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX. RECOMMENDED OPERATING TEMPERATURE: 343°C [649°F] MAX	DIMENSIONS: mm [INCHES] 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	NAME SPLICE, BUTT, STANDARD HEAT RESISTANT™ STRATO-THERM, 22-16 AWG					
FOR APPLICATION	TOOLING ASSISTANCE CENTER	VOLTAGE RATING: NOT APPLICABLE			PRODUCT SPEC — APPLICATION SPEC —					
TOOLING INFORMATION	1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE, 0.26-1.65mm²[509-3,260] CIR MILS SOLID OR STRANDED			SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C=323796 —					
FOR ORDER ENTRY	1-800-526-5142		MATERIAL COPPER PER ASTM B-152 ANNEALED	FINISH NICKEL PLATE 0.00762[.000300] MIN THK PER SAE AMS QQ-N-290	WEIGHT		CUSTOMER DRAWING	SCALE 10:1	SHEET 1 of 1	REV F 1