

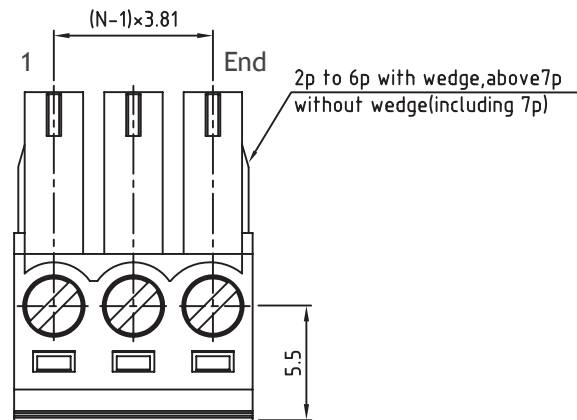


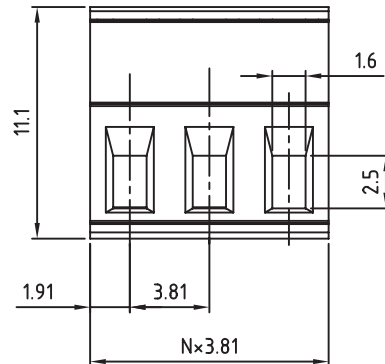

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

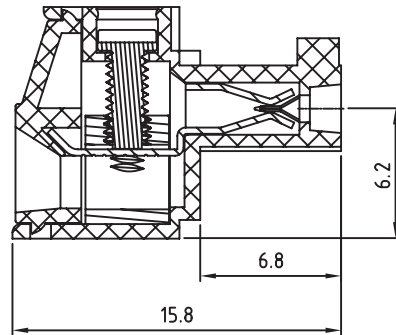

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA 66

FLAMABILITY RATING: UL94-V0

COLOR: GREEN

METAL HOUSING: BRASS (CuZn)

TERMINAL SCREW: STEEL ZINC PLATING "-" SLOT TYPE

WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105°C

COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING:

cULus

VDE

WORKING VOLTAGE:

300VAC

300VAC

WITHSTANDING VOLTAGE:

1.6KV	2.5KV
-------	-------

CONTACT RESISTANCE: 20 mOhm MAX

STANDARD

CALIFORNIA CERTIFIED E315414

 CERTIFIED 40023195

MECHANICAL

SOLID WIRE:

26-16 AWG / 0.129-1.31 MM²

STRANDED WIRE:

26-16 AWG / 0.129-1.31 MM²

TORQUE:

3.0 Lb.In / 0.34 Nm

WIRE STRIPE LENGTH: 6-7 MM

SCREW: M2

PITCH: 3.81 MM

PACKAGING

BOX

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15			
G								
F								
E								
D	08-FEV-11	DIMENSSIONS	GG	APPROVAL: FBr	UNIT: MM	DESCRIPTION: SERIE 361 - 3.81MM VERTICAL CABLE ENTRY PLUG - WR-TBL		SIZE A4
C	12-OCT-09	STANDARD	JP		SCALE:			
B	29-OCT-08	CHARACTERISTICS	JP		SHEET: 1/2	WERI PART NO: 691 361 300 0xx		
A	31-OCT-07	PDF	EC		DRAW: MARVIN			
REV	DATE	FILE	BY					

