



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Type TCD

Time-Delay High Breaking Capacity


5 x 20 mm Ceramic Fuse



www.optifuse.com

(619) 593-5050

Agency Standards and Listings:



CCC	1A~6.3A
CQC	8A, 10A, 12.5A, 16A
SEMKO	1A~10A, 12.5A, 16A
VDE	1A~10A, 12.5A, 16A
BSI	1A~6.3A
PSE	1A~15A
KC	1A~10A

Interrupt Ratings:

1500Amperes at 250V AC

Time Characteristics

Rated Current	210%	275%		400%		1000%	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX
200mA~ 800mA	30 min	250 ms	80 sec	50 ms	5 sec	5 ms	150 ms
1A~3.15A	30 min	750 ms	80 sec	95 ms	5 sec	10 ms	150 ms
4A~10A	30 min	750 ms	80 sec	150 ms	5 sec	10 ms	150 ms
12A~16A	30 min	1 sec	80 sec	150 ms	8 sec	20 ms	150 ms

Operating Temperature:

-55°C to +125°C

Material:

Ceramic Body/Nickel Plated Brass Caps

Lead Wire Ø0.65mm - < 10A

Ø0.8mm - 10A ~ 12A



Ø1.0mm - > 12A

Packaging:

TCD 1000 pcs; TCD-P 500 pcs per box.

Cartridge Part number	Axial Lead Part number	Ampere Rating	Voltage Rating
TCD-200mA	TCD-P-200mA	200mA	250V
TCD-250mA	TCD-P-250mA	250mA	
TCD-315mA	TCD-P-315mA	315mA	
TCD-400mA	TCD-P-400mA	400mA	
TCD-500mA	TCD-P-500mA	500mA	
TCD-630mA	TCD-P-630mA	630mA	
TCD-800mA	TCD-P-800mA	800mA	
TCD-1A	TCD-P-1A	1A	
TCD-1.25A	TCD-P-1.25A	1.25A	
TCD-1.6A	TCD-P-1.6A	1.6A	
TCD-2A	TCD-P-2A	2A	
TCD-2.5A	TCD-P-2.5A	2.5A	
TCD-3.15A	TCD-P-3.15A	3.15A	
TCD-4A	TCD-P-4A	4A	
TCD-5A	TCD-P-5A	5A	
TCD-6.3A	TCD-P-6.3A	6.3A	
TCD-8A	TCD-P-8A	8A	
TCD-10A	TCD-P-10A	10A	
TCD-12A	TCD-P-12A	12A	
TCD-12.5A	TCD-P-12.5A	12.5A	
TCD-15A	TCD-P-15A	15A	
TCD-16A	TCD-P-16A	16A	

Mechanical Dimensions: Inches [mm]

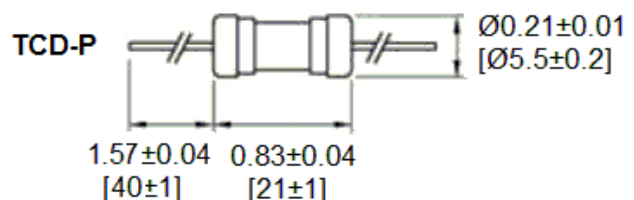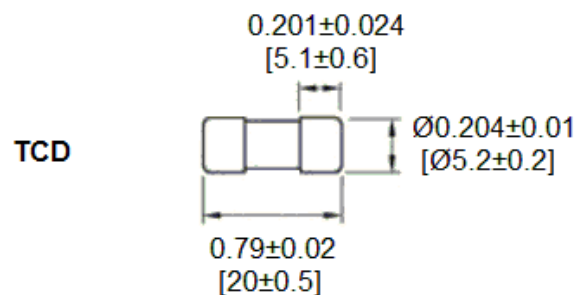

Note: All specifications subject to change without notice.

Rev D 01/2016 - Page: 1/2
Code: H01-01H

Type TCD
Time-Delay High Breaking Capacity
5 x 20 mm Ceramic Fuse




www.optifuse.com

(619) 593-5050

Part Number TCD

TIME CURRENT CURVES

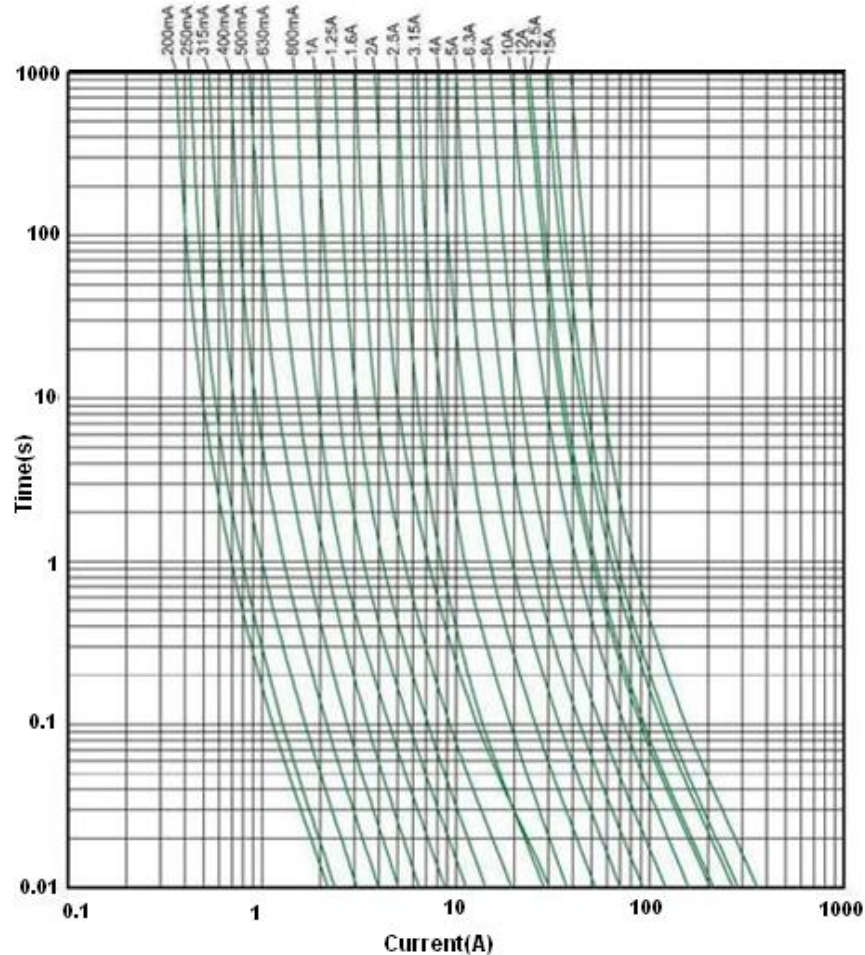

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
-Glass Fuse device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
-Avoid contact of Glass Fuse device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev D 01/2016 - Page: 2/2
Code: H01-01H