







EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF 2DIRECT GMBH.ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF 2DIRECT GMBH IS PROHIBITED. WE RESERVE THE RIGHT TO MAKE TECHNICAL CHANGES. TECHNISCHE ÄNDERUNGEN VORBEHALTEN.

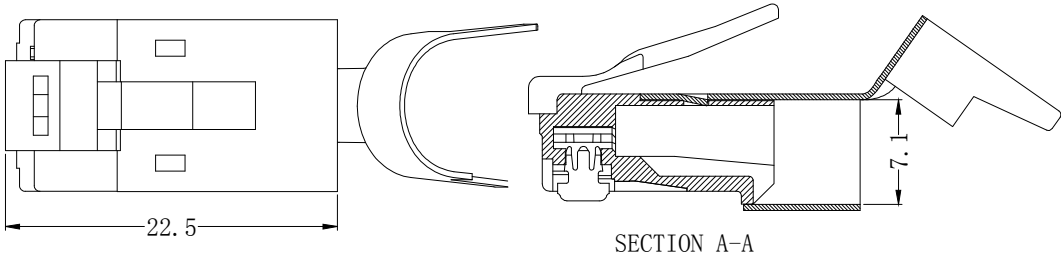

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/10/18	

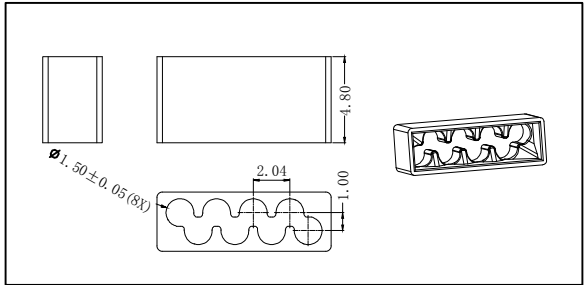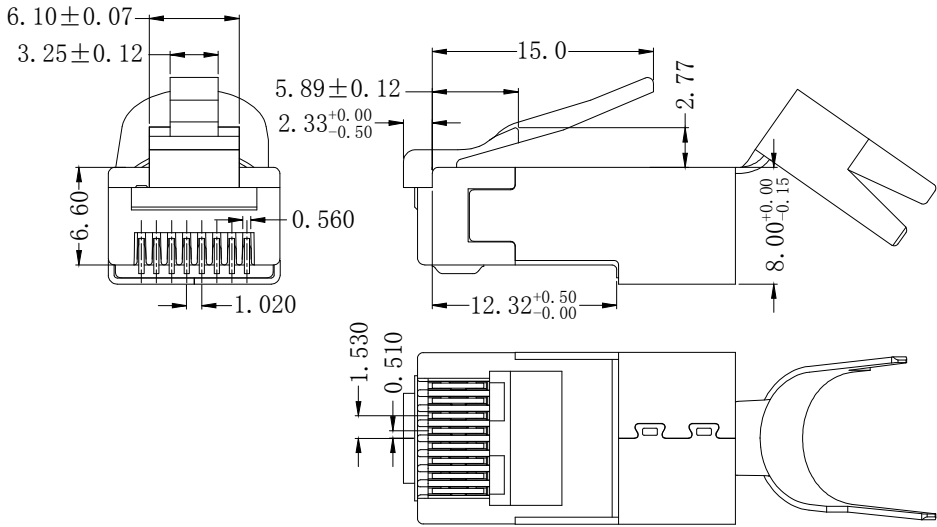

NOTES:

ELECTRICAL:

- 1.Contact Resistance : 20MΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 100V DC min
3. Withstand Voltage : 1000V AC
4. Voltage, Current: 125V AC 1.5A 25°C

MECHANICAL

1. insertion force&withdrawal force:30N MAX.
2. RJ45 Contact Life: 750 Times Min

ENVIRONMENTAL:

1. Storage : -40° T0+70°
 2. Operation : -10° to+60°
- RoHS 2.0 and REACH Compliant





ITEM NO.	PACKING
MP0030	10PCS/PE BAG
MP0033	50PCS/PE BAG



MATERIAL LIST:

⑥		Conductor	Stranded&solid Cable		1		DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED			APPROVALS		DATE		2direct GmbH					
⑤		Colour	Transparent		1		TOLERANCE			DRAWN BY		10/31/19							
④		Gold plating	50u"		8		.X							PRODUCT TITLE					
③		Contact blade	COPPER ALLOY		1		.XX												
②		Shell	Copper nickel plating		1		.XXX							Shielded modular plug for CAT8.1/CAT.6A					
①		Housing	POLYCARBONATE UL 94V2 used for the cable with the insulation OD from 1.2-1.45mm		1		PROJECTION					CONFIGURATION DETAILE OF UNDIMENSIONED FEATURES MAY VARY							
NO.	PARTS NAME	SPECIFICATION STANDARD				QT' Y	REMARK						ITEM NO.		MP0030 MP0033		DWG.NO.		REV. A
	1			2		3		4		5			6		7		SCALE:NONE	UNITS:mm	SHEET /1



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF 2DIRECT GMBH.ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF 2DIRECT GMBH IS PROHIBITED. WE RESERVE THE RIGHT TO MAKE TECHNICAL CHANGES. TECHNISCHE ÄNDERUNGEN VORBEHALTEN.

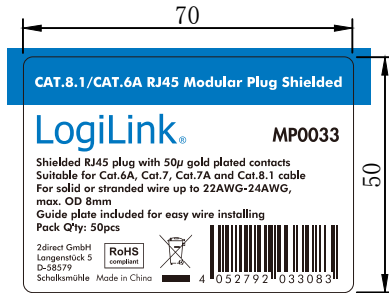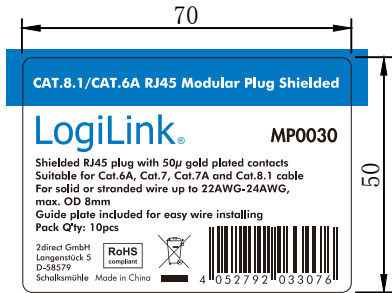

LABEL




PE BAG+LABEL

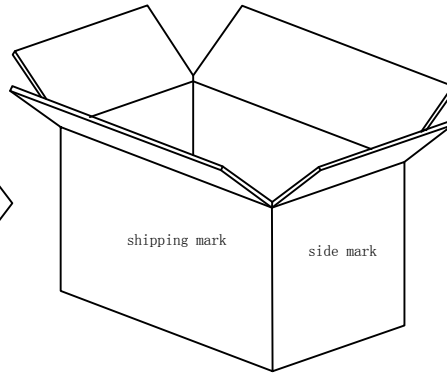


Outer carton

Five layer corrugated carton(outer carton):



“工” Sealing

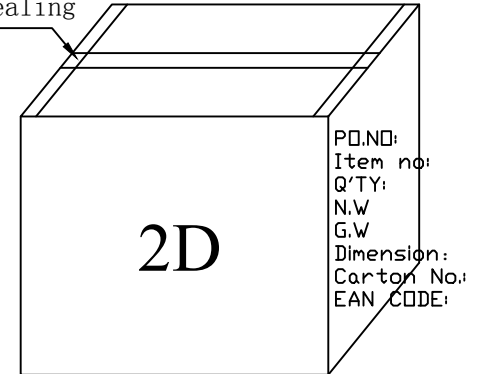

Outer carton

PACKING
10PCS/PE BAG+LABEL (LABEL SIZE: 50X70MM)
50PCS/PE BAG+LABEL (LABEL SIZE: 100X140MM)
TOTAL 5000PCS PER CARTON (CARTON SIZE: 43*34.5*29CM),
WITH STANDARD SHIPPING MARK

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/10/18	

					DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED			APPROVALS		DATE		2direct GmbH						
					TOLERANCE inch mm			DRAWN BY		10/31/19								
					.X					CHECKED BY		10/31/19		Shielded modular plug for CAT8.1/CAT.6A				
					.XX					APPROVED BY		10/31/19						
					.XXX													
					PROJECTION					CONFIGURATION DETAIL OF UNDIMENSIONED FEATURES MAY VARY		ITEM NO. MP0030 MP0033		DWG.NO.		REV. A		
NO.	PARTS NAME	SPECIFICATION STANDARD			QT' Y	REMARK						COLOR VARIATIONS MAY OCCUR		SCALE:NONE	UNITS:mm	SHEET /2		