




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

TANE ALARM PRODUCTS



Installation instructions for FM-102 family of Surface Mount - Door and Window Contacts

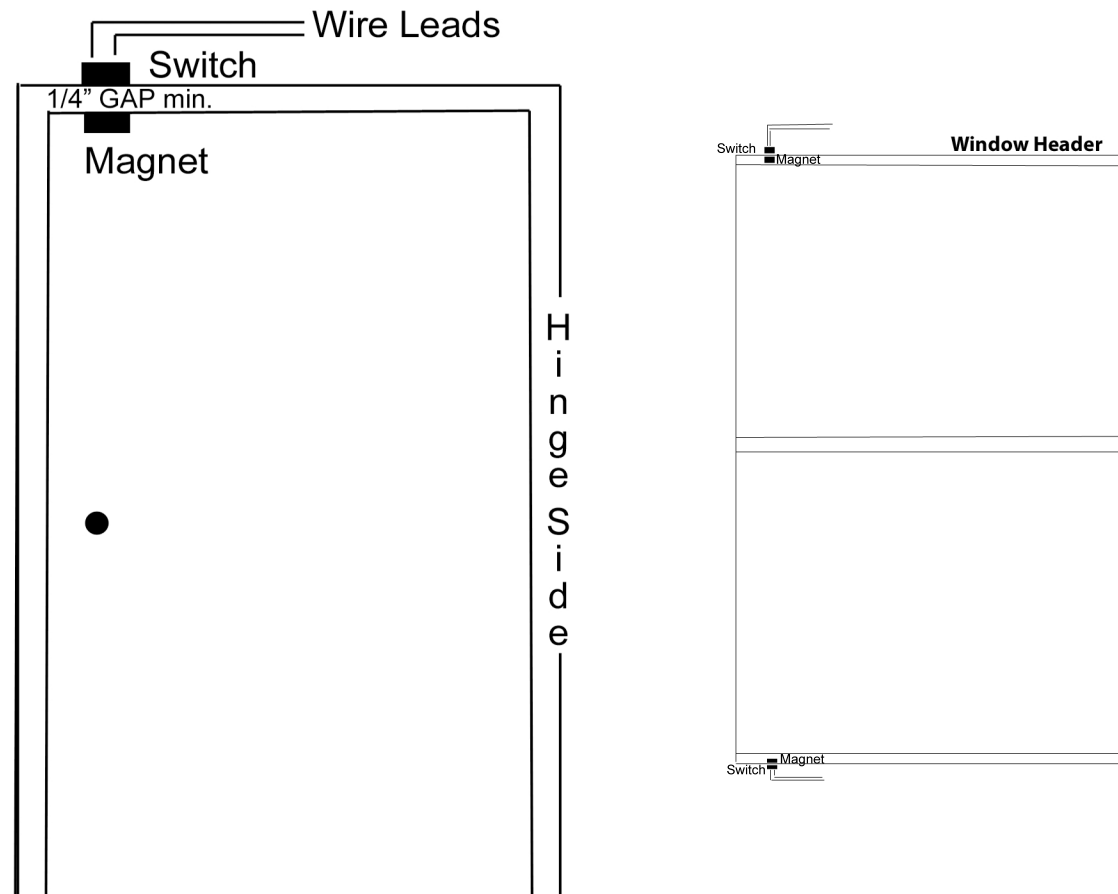

Surface mount switch at top or side (NOT on hinge side) of door or hinged window frame
On double hung window, surface mount the switch at top, side or bottom of window frame
Surface mount the magnet parallel to the switch
Make sure Gap is not less than 1/4" between switch and magnet
Splice leads from switch into alarm circuit
NOT for use with Steel doors and windows

WWW.TANEALARM.COM

906 Jericho Turnpike
New Hyde Park, NY 11040

Tel: 516-328-3351 800-852-5050
Fax: 516-326-9125 Email: info@tanealarm.com