



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Lead tapping radial lead type

● Dimensions

Case size (mm) $\phi D \times L$	Lead space (F)		
	2.5 mm	5.0 mm	7.5 mm
4 $\times$ 5, 7	B	A	
5 $\times$ 5, 7	B	A	
6.3 $\times$ 5, 7	C	A	
8 $\times$ 5, 7	C	E	
5 $\times$ 11	C	D	
6.3 $\times$ 11.2, 15	C	D	
8 $\times$ 11.5, 15, 20		E	
10 $\times$ 12.5, 16, 20, 25		F	
12.5 $\times$ 15, 20, 25		G	
16 $\times$ 15, 20, 25			H
18 $\times$ 15, 20, 25			H

Figure A (Lead space: 5.0 mm / $\phi D \times L$: $\phi 4 \times 5, 7, \phi 5 \times 5, 7, \phi 6.3 \times 5, 7$)

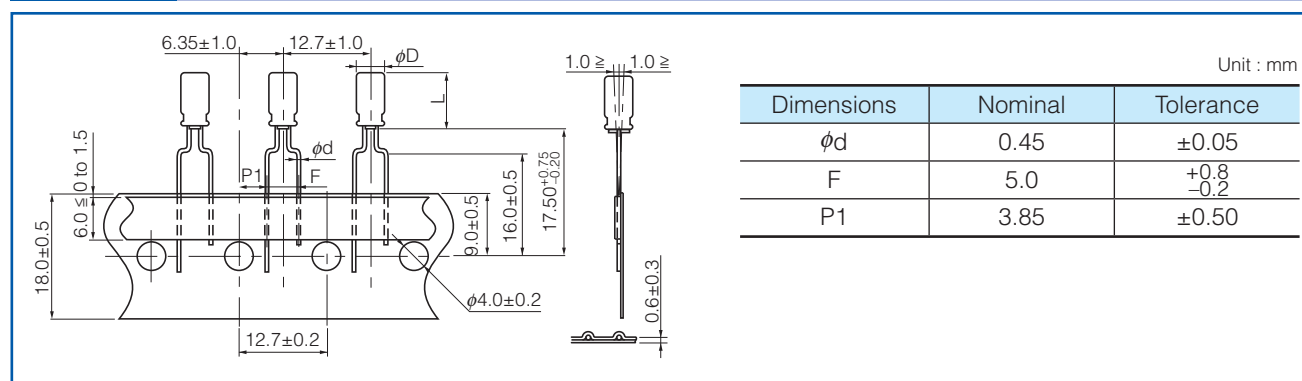


Figure B (Lead space: 2.5 mm / $\phi D \times L$: $\phi 4 \times 5, 7, \phi 5 \times 5, 7$)

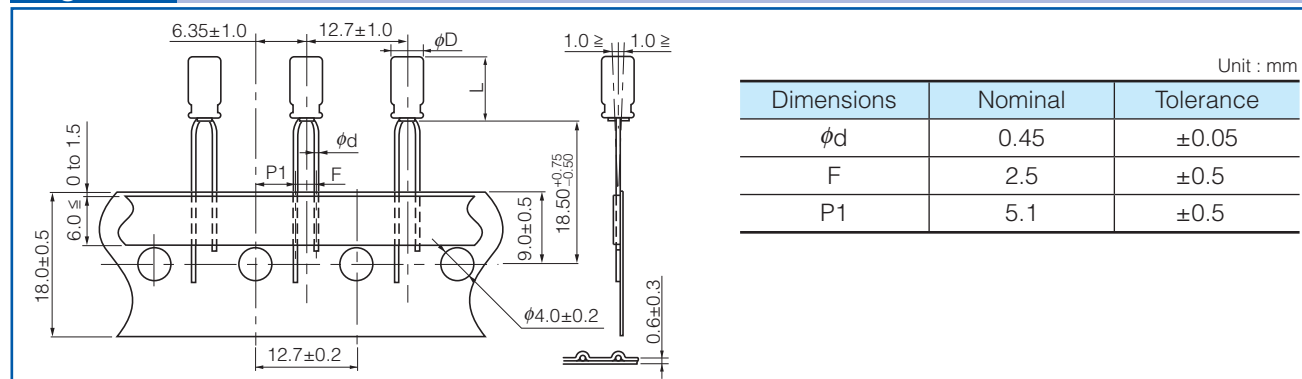


Figure C (Lead space: 2.5 mm / $\phi D \times L$: $\phi 5 \times 11, \phi 6.3 \times 5, 7, 11.2, 15, \phi 8 \times 5, 7$)


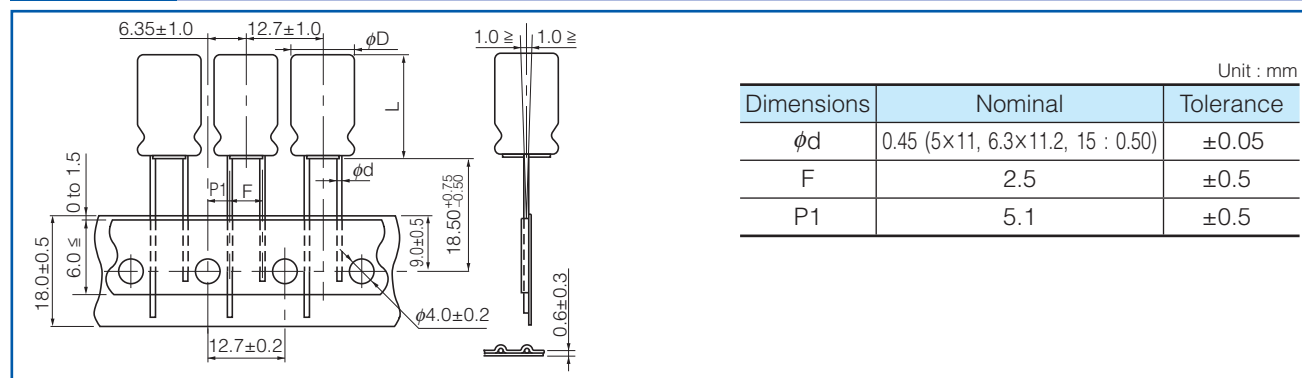



Figure D (Lead space: 5 mm / $\phi D \times L$: $\phi 5 \times 11$, $\phi 6.3 \times 11.2$, 15)

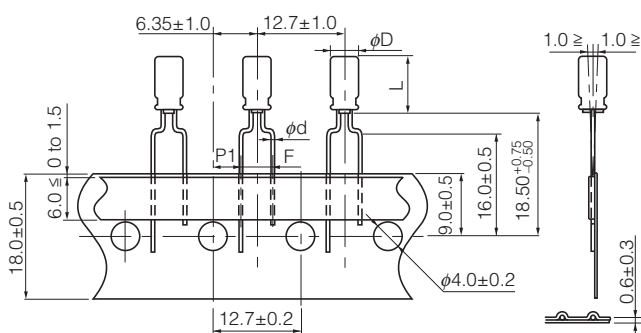

Unit : mm

Dimensions	Nominal	Tolerance
ϕd	0.50	± 0.05
F	5.0	$+0.8$ -0.2
P1	3.85	± 0.50


Figure E (Lead space: 5 mm / $\phi D \times L$: $\phi 8 \times 5$, 7, 11.5, 15, 20)

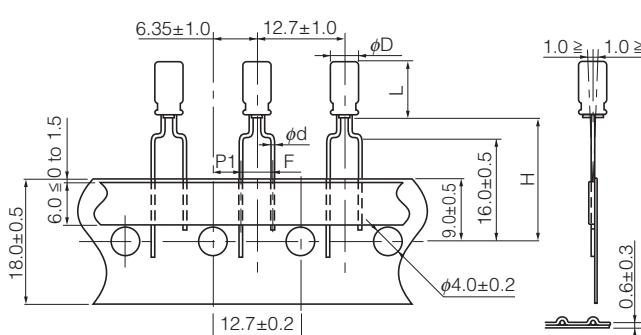

Unit : mm

Dimensions	Nominal		Tolerance
	$\phi 8 \times 11.5$ to 20	$\phi 8 \times 5$, 7	
Suffix code	B	BQ	
ϕd	0.60	0.45	± 0.05
F	5.0		$+0.8$ -0.2
P1	3.85		± 0.50
H	20.00	18.50	$+0.75$ -0.50


Figure F (Lead space: 5 mm / $\phi D \times L$: $\phi 10 \times 12.5$, 16, 20, 25)

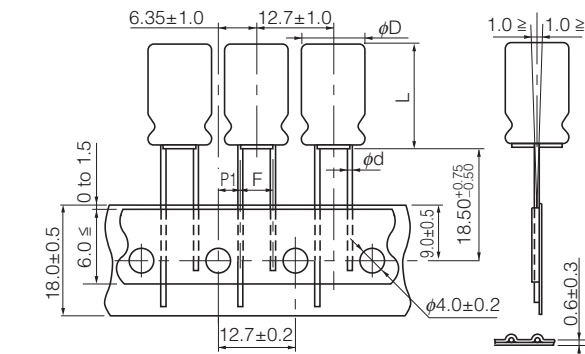

Unit : mm

Dimensions	Nominal	Tolerance
ϕd	0.60	± 0.05
F	5.0	$+0.8$ -0.2
P1	3.85	± 0.50


Figure G (Lead space: 5 mm / $\phi D \times L$: $\phi 12.5 \times 15$, 20, 25)

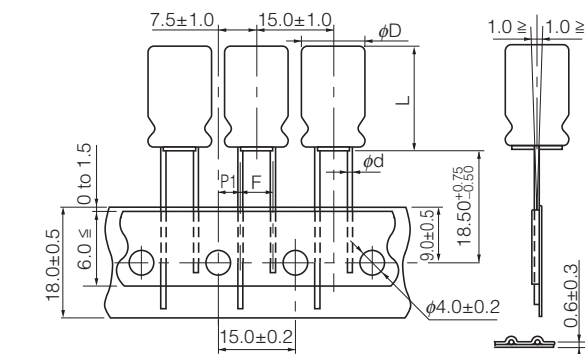

Unit : mm

Dimensions	Nominal	Tolerance
ϕd	0.60	± 0.05
F	5.0	$+0.8$ -0.2
P1	5.0	± 0.5

Figure H (Lead space: 7.5 mm / $\phi D \times L$: $\phi 16 \times 15, 20, 25$, $\phi 18 \times 15, 20, 25$)



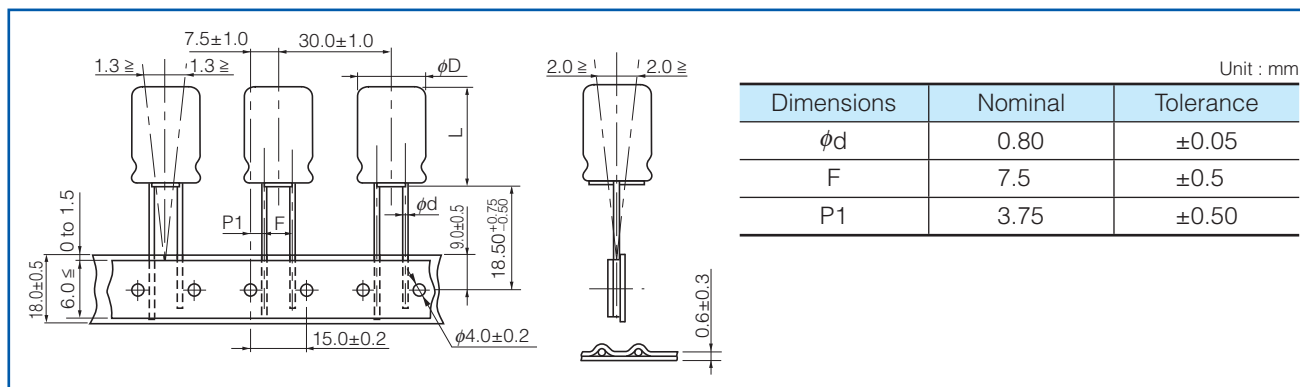


Packaging Specifications

Dimensions		Dimensions of outer carton box				
		Unit : mm				
		$\phi 4$ to $\phi 5$	$\phi 6.3$	$\phi 8$	$\phi 10, \phi 12.5$	$\phi 16, \phi 18$
a		340 max.	340 max.	340 max.	340 max.	340 max.
b		to 55 max.	to 55 max.	to 55 max.	55 to 66 max.	62 to 75 max.
c		170 to 210 max.	270 max.	230 max.	170 to 270 max.	225 to 310 max.
Packaging Quantity		2000 pcs.	2000 pcs.	1000 pcs.	500 pcs.	250 pcs.

Lead Forming Type (Snap-in)

Lead formed Aluminium Electrolytic Capacitor for self mounting, for rationalization and upgrade of soldering process.

ϕD	Dimensions	
4, 5, 6.3, 8		
10, 12.5, 16, 18		

* Direction of bending shape is not specified

Dimensions

Unit : mm

ϕD	$H1 \pm 0.5$	$H2$	$H3$	$F \pm 0.5$	P	$E \text{ max.}$	ϕd	for PWB	
								hole dia. ϕ	thickness
5	4.5	2.7	2.5	5.0	1.0	1.0	0.5	0.9	1.6
6.3	4.5	2.7	2.5	5.0	1.0	1.0	0.5	1.0	1.6
8	4.5	2.7	2.5	5.0	1.0	1.0	0.6	1.0	1.6
10	4.5	2.7	—	5.0	1.0	1.0	0.6	1.0	1.6
12.5	4.5	2.7	—	5.0	1.0 / 0.9	1.0	0.6 / 0.8	1.0 / 1.1	1.6
16	4.5	2.7	—	7.5	0.9	1.0	0.8	1.1	1.6
18	4.5	2.7	—	7.5	0.9	1.0	0.8	1.1	1.6

Series KA/KS Dimensions

Unit : mm

ϕD	$H1 \pm 0.5$	$H2$	$H3 \pm 0.3$	$F \pm 0.5$	P	$E \text{ max.}$	ϕd	for PWB	
								hole dia. ϕ	thickness
4	4.5	2.7	1.5	5.0	0.95	1.0	0.45	0.9	1.6
5	4.5	2.7	1.5	5.0	0.95	1.0	0.45	0.9	1.6
6.3	4.5	2.7	1.5	5.0	0.95	1.0	0.45	0.9	1.6
8	4.5	2.7	1.5	5.0	0.95	1.0	0.45	0.9	1.6