



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV. C

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:	TITLE:	DWG NO:
ONE PLACE DECIMALS $\pm .1$	THREE PLACE DECIMALS $\pm .005$		ANGLES $\pm 5^\circ$	2 mm C.L. SHUNT ASSEMBLY	2SN-XX-X
TWO PLACE DECIMALS $\pm .01$	FOUR PLACE DECIMALS $\pm .0020$				SHEET 1 OF 1




2SN-XX-X

COLOR SPECIFICATION

-BK: BLACK

PLATING SPECIFICATION

-G: GOLD: SPECIFY -G IN CONTACT SUFFIX -X

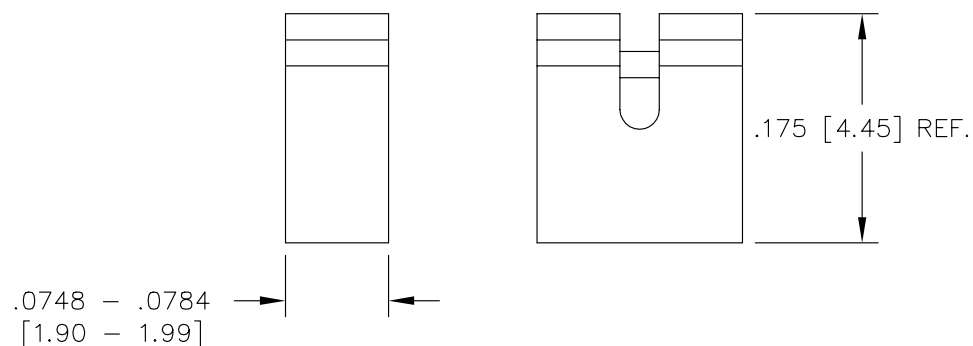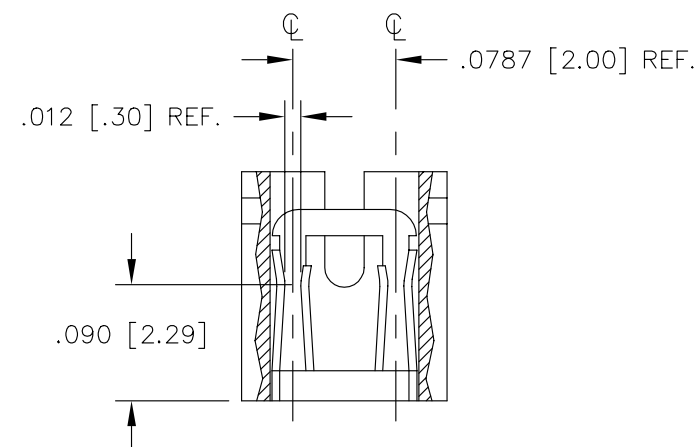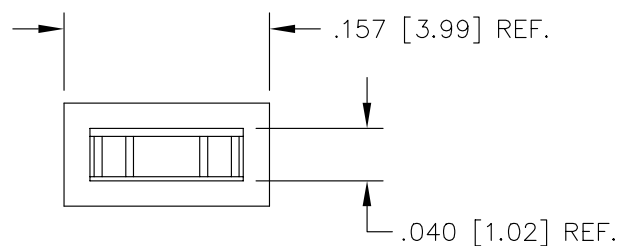

NOTES:

1. DIM IN [] ARE METRIC AND ARE NOT CONTROLLING DIMENSIONS.
2. INSULATOR MATERIAL: BLACK, GLASS-FILLED POLYESTER.
CONTACT MATERIAL: PHOSPHOR BRONZE

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSFERRED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.

PLOT SCALE: 1=.075

		MISC\MKTG 2SN-MKT
		520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150 PHONE (812) 944-6733 P.O. BOX 1147 CODE 55322
MADE BY: GREG REIDINGER 3-8-93	ENG APPROVAL	2SN-XX-X SHEET 1 OF 1
CHECKED BY: ECKERT	PAE	