



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Subminiature Fuse, 8.5 mm, Time-Lag T, 250 VAC, 35 A



IEC 60127-3 · 250 VAC · Time-Lag T

**Description**

- Directly solderable on printed circuit boards
- Low Breaking Capacity

Standards

- IEC 60127-3/4
- UL 248-14
- CSA C22.2 no. 248.14

Approvals

- VDE License Number: 40013529 (0.05 A - 4 A), 40002080 (5 A + 6.3 A)
- UL File Number: E41599

Applications

- Primary Protection on PCB
- Power Supply Adapter for e.g. laptops
- SMPS (Switching Mode Power Supply) for TV's and DVD's

References

General Product Information

Time-Current Curves see last page



Corresponding Fuseholder [FMS \(250V\)](#)Fuse Kit [Microfuses](#)[Packaging Details](#)**Weblinks**Approvals: www.schurter.com/approvalsRoHS: <http://www.schurter.com/rohs>CHINA-RoHS: www.schurter.com/china-rohsWebstore: www.schurterinc.com/estore/search.html**Technical Data**

Rated Voltage	250 VAC
Rated Current	0.05 - 6.3 A
Breaking Capacity	35 A - 63 A
Characteristic	Time-Lag T
Mounting	PCB, THT
Admissible Ambient Air Temp.	-55 °C to 125 °C
Climatic Category	55/125/21 acc. to IEC 60068-1
Material: Housing	Thermoplastic, UL 94V-0
Material: Terminals	Tin-Plated Copper
Unit Weight	0.53 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Current Rating, Voltage Rating, Characteristic, Approvals

Soldering Methods	Wave, Iron
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Moisture Resistance Test	MIL-STD-202, Method 106E (50 cycles in a temp./mister chamber)
Terminal Strength	MIL-STD-202, Method 211A (Deflection of board 1 mm for 1 minute)
Case Resistance	acc. to EIA/IS-722, Test 4.7 >100 MΩ (between leads and body)
Mechanical Shock	MIL-STD-202, Method 213B (Shock 50gn, half sine wave, 11 ms)
Vibration, High Frequency	MIL-STD-202, Method 204D (Shock 20 gn, 20 min, 10-2 kHz, 12 cyc.)
Resistance to Solvents	MIL-STD-202, Method 215A

Dimensions

Length 8.5 mm

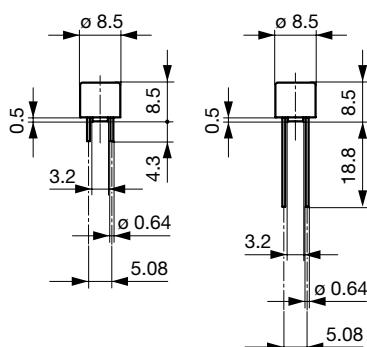

Drilling Diagram

Pre-Arcing Time

Rated Current I _n	1.5 x I _n min.	2.1 x I _n max.	2.75 x I _n min.	2.75 x I _n max.	4.0 x I _n min.	4.0 x I _n max.	10.0 x I _n min.	10.0 x I _n max.
0.05 A - 6.3 A	60 min	120 s	400 ms	10 s	150 ms	3 s	20 ms	150 ms

Variants

Webstore

S = Short Terminals

L = Long Terminals

T = Taped and Reeled

Order Number	S	L	T	Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n max. [mV]	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.5 I _n max. [mW]	Melting I ² t 10.0 Intyp. [A ² s]							
0034.6602	●			0.05	250	1)	550	415	155	0.03	●	●	●	●	●	●	●
0034.6603	●			0.063	250	1)	480	420	160	0.05	●	●	●	●	●	●	●
0034.6604	●			0.08	250	1)	400	360	165	0.06	●	●	●	●	●	●	●
0034.6605	●			0.1	250	1)	350	320	170	0.08	●	●	●	●	●	●	●
0034.6606	●			0.125	250	1)	300	270	180	0.12	●	●	●	●	●	●	●
0034.6607	●			0.16	250	1)	280	190	190	0.24	●	●	●	●	●	●	●
0034.6608	●			0.2	250	1)	260	150	200	0.35	●	●	●	●	●	●	●
0034.6609	●			0.25	250	1)	240	120	220	0.6	●	●	●	●	●	●	●
0034.6610	●			0.315	250	1)	220	120	250	0.8	●	●	●	●	●	●	●
0034.6611	●			0.4	250	1)	200	110	280	1.1	●	●	●	●	●	●	●
0034.6612	●			0.5	250	1)	190	100	310	2.5	●	●	●	●	●	●	●
0034.6613	●			0.63	250	1)	180	90	360	4	●	●	●	●	●	●	●
0034.6614	●			0.8	250	1)	160	80	430	8	●	●	●	●	●	●	●
0034.6615	●			1	250	1)	140	70	500	12	●	●	●	●	●	●	●
0034.6616	●			1.25	250	1)	130	70	600	15	●	●	●	●	●	●	●
0034.6617	●			1.6	250	1)	120	60	730	30	●	●	●	●	●	●	●
0034.6618	●			2	250	1)	100	60	870	34	●	●	●	●	●	●	●
0034.6619	●			2.5	250	1)	100	50	1000	55	●	●	●	●	●	●	●
0034.6620	●			3.15	250	1)	100	50	1200	76	●	●	●	●	●	●	●
0034.6621	●			4	250	2)	100	50	1400	80	●	●	●	●	●	●	●
0034.6622	●			5	250	2)	-	50	-	230	●	●			●	●	●
0034.6623	●			6.3	250	2)	-	45	-	360	●	●			●	●	●
0034.6702	●			0.05	250	1)	550	415	155	0.03	●	●	●	●	●	●	●
0034.6703	●			0.063	250	1)	480	420	160	0.05	●	●	●	●	●	●	●
0034.6704	●			0.08	250	1)	400	360	165	0.06	●	●	●	●	●	●	●
0034.6705	●			0.1	250	1)	350	320	170	0.08	●	●	●	●	●	●	●
0034.6706	●			0.125	250	1)	300	270	180	0.12	●	●	●	●	●	●	●
0034.6707	●			0.16	250	1)	280	190	190	0.24	●	●	●	●	●	●	●
0034.6708	●			0.2	250	1)	260	150	200	0.35	●	●	●	●	●	●	●
0034.6709	●			0.25	250	1)	240	120	220	0.6	●	●	●	●	●	●	●
0034.6710	●			0.315	250	1)	220	120	250	0.8	●	●	●	●	●	●	●
0034.6711	●			0.4	250	1)	200	110	280	1.1	●	●	●	●	●	●	●
0034.6712	●			0.5	250	1)	190	100	310	2.5	●	●	●	●	●	●	●
0034.6713	●			0.63	250	1)	180	90	360	4	●	●	●	●	●	●	●
0034.6714	●			0.8	250	1)	160	80	430	8	●	●	●	●	●	●	●
0034.6715	●			1	250	1)	140	70	500	12	●	●	●	●	●	●	●
0034.6716	●			1.25	250	1)	130	70	600	15	●	●	●	●	●	●	●
0034.6717	●			1.6	250	1)	120	60	730	30	●	●	●	●	●	●	●
0034.6718	●			2	250	1)	100	60	870	34	●	●	●	●	●	●	●
0034.6719	●			2.5	250	1)	100	50	1000	55	●	●	●	●	●	●	●
0034.6720	●			3.15	250	1)	100	50	1200	76	●	●	●	●	●	●	●
0034.6721	●			4	250	2)	100	50	1400	80	●	●	●	●	●	●	●
0034.6722	●			5	250	2)	-	50	-	230	●	●			●	●	●
0034.6723	●			6.3	250	2)	-	45	-	360	●	●			●	●	●
0034.6802	●			0.05	250	1)	550	415	155	0.03	●	●	●	●	●	●	●
0034.6803	●			0.063	250	1)	480	420	160	0.05	●	●	●	●	●	●	●

Order Number	S	L	T	Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I _n max. [mV]	Voltage Drop 1.0 I _n typ. [mV]	Power Dissipation 1.5 I _n max. [mW]	Melting I ² t 10.0 I _n typ. [A ² s]							
0034.6804	•			0.08	250	1)	400	360	165	0.06	•	•	•	•	•	•	•
0034.6805	•			0.1	250	1)	350	320	170	0.08	•	•	•	•	•	•	•
0034.6806	•			0.125	250	1)	300	270	180	0.12	•	•	•	•	•	•	•
0034.6807	•			0.16	250	1)	280	190	190	0.24	•	•	•	•	•	•	•
0034.6808	•			0.2	250	1)	260	150	200	0.35	•	•	•	•	•	•	•
0034.6809	•			0.25	250	1)	240	120	220	0.6	•	•	•	•	•	•	•
0034.6810	•			0.315	250	1)	220	120	250	0.8	•	•	•	•	•	•	•
0034.6811	•			0.4	250	1)	200	110	280	1.1	•	•	•	•	•	•	•
0034.6812	•			0.5	250	1)	190	100	310	2.5	•	•	•	•	•	•	•
0034.6813	•			0.63	250	1)	180	90	360	4	•	•	•	•	•	•	•
0034.6814	•			0.8	250	1)	160	80	430	8	•	•	•	•	•	•	•
0034.6815	•			1	250	1)	140	70	500	12	•	•	•	•	•	•	•
0034.6816	•			1.25	250	1)	130	70	600	15	•	•	•	•	•	•	•
0034.6817	•			1.6	250	1)	120	60	730	30	•	•	•	•	•	•	•
0034.6818	•			2	250	1)	100	60	870	34	•	•	•	•	•	•	•
0034.6819	•			2.5	250	1)	100	50	1000	55	•	•	•	•	•	•	•
0034.6820	•			3.15	250	1)	100	50	1200	76	•	•	•	•	•	•	•
0034.6821	•			4	250	2)	100	50	1400	80	•	•	•	•	•	•	•
0034.6822	•			5	250	2)	-	50	-	230	•	•	•	•	•	•	•
0034.6823	•			6.3	250	2)	-	45	-	360	•	•	•	•	•	•	•

1) IEC: 35 A @ 250 VAC

1) UL: 35 A @ 250 VAC / 50 A @ 125 VDC

2) IEC: 10 I_n @ 250 VAC2) UL: 10 I_n @ 250 VAC / 10 I_n @ 125 VDC**Packaging Unit**

S + L = Plastic Bag (100 pcs.)

T = Taped 36 cm Reel (750 pcs.)

Time-Current Curves