EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Datasheet

Last Updated: 25-July-2024

ED-Pi5Case-EXT

Metal Case supporting Raspberry Pi 5 + HAT

- Sheet metal powder spraying + aluminium profile technology, simple design
- Both top and bottom case provide passive cooling for Raspberry Pi 5 though thermal pads & metal body, excellent cooling performance
- Good protection for Raspberry Pi 5, Raspberry Pi Active Cooler and Raspberry Pi M.2 HAT+
- Support installation of Raspberry Pi 5 + Raspberry Pi M.2 HAT+
- Support installation of Raspberry Pi Active Cooler
- HDMI, Ethernet port, USB, SD card, ON/OFF button and PWR/ACT indicator are all accessible
- Reserved camera cable slots and mounting holes for installing the Raspberry Pi Camera on the case
- All-metal casing with an attractive appearance for commercial and industrial scenarios



Specifications

Cooling Performance		
Test Device Configuration	Raspberry Pi 5 + Raspberry Pi AI Kit + Raspberry Pi Active Cooler	Raspberry Pi 5 + Raspberry Pi AI Kit + Raspberry Pi Active Cooler + ED-Pi5Case-EXT
Software Configuration	•CPU 4 cores running at full load via sysbench • Run **stress_test** in Hailo Module	
Ambient Temperature	25˚C	
Hailo*1 Module stable operating temperature (˚C)	93.1	73.3
Stable running temperature of CPU (˚C)	65.1	65.1
***1:** Hailo module is an operation module located on Raspberry Pi AI kit. **Test Results**: Under the environment of 25˚C, when the device is running in a stable state, ED-Pi5Case-EXT can reduce the temperature of Raspberry Pi AI Kit by about 20˚C, and also reduce the temperature fluctuation range of Raspberry Pi 5 CPU.		

Mechanical Characteristics	
Dimensions	91mm x 61mm x 33mm
Material	Sheet Metal (Top Cover) + Aluminium Profile (Bottom Cover)

Dimensions

Unit: mm

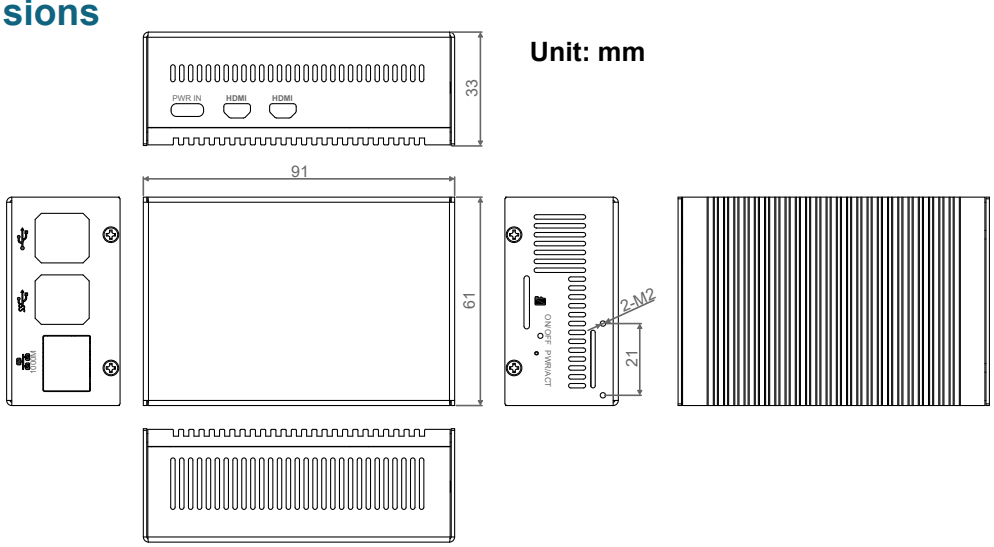

China
Phone: +86-18627838895 | Email: sales@edatec.cn / support@edatec.cn
EDA Technology Co., LTD

Overseas
Phone:+86-18217351262 | Email: sales@edatec.cn / support@edatec.cn
www.edatec.cn

Ordering Code

P/N: **ED-Pi5Case-EXT**

Configuration: Metal Case supporting Raspberry Pi 5 + HAT

Packing List

- 1 x ED-Pi5Case-EXT Top Cover
- 1 x ED-Pi5Case-EXT Bottom Cover
- 1 x Accessory Set (With 2 x M2*H8 cylindrical sleeves, 2 x M2*12 screws, 4 x M2.5*21 Screws, 4 x M2.5*4 Screws, 4 x M2.5*H15 cylindrical sleeves and A pair of tweezers)

Installation

The following is an example of installation for Raspberry Pi 5 + Raspberry Pi M.2 HAT+.

Parts list:

NO.	Name	Quantity (PCS)
1	ED-Pi5Case-EXT Top Cover	1
2	ED-Pi5Case-EXT Bottom Cover	1
3	Raspberry Pi 5 (Not provided)	1
4	Raspberry Pi Active Cooler (Not provided)	1
5	Raspberry Pi M.2 HAT+ (Not provided)	1
6	40-Pin connector (Not provided)	1
7	Raspberry Pi Camera Module 3 (Not provided)	1
8	M2*H8 cylindrical sleeves	2
9	M2*12 screws	2
10	M2.5*4 screws	4
11	M2.5*H15 cylindrical sleeves	4
12	M2.5*21 screws	4
13	tweezers	1

Note:

- Raspberry Pi 5, Raspberry Pi Active Cooler, Raspberry Pi M.2 HAT+, Raspberry Pi Camera Module 3 and SD card are not included in the box, the following is intended as an installation illustration only.
- Before you start installing, please remove the White Protective Paper from thermal silicone in the case.
- If the Raspberry Pi AI Kit is installed, please make sure that the thermally conductive silicone in the Top Cover is in full contact with the Hailo IC.
- You can log in to Raspberry Pi website (**https://www.raspberrypi.com**) to get assembly instructions of Raspberry Pi Active Cooler, Raspberry Pi M.2 HAT+ and Raspberry Pi Camera Module 3.

Steps:

①Pass the FPC cable from the **Raspberry Pi Camera Module 3** through the pre-drilled hole on the **ED-Pi5Case-EXT**, then use two M2*H8 cylindrical sleeves and two M2*12 screws to secure the Camera to the outside of **ED-Pi5Case-EXT Top Cover**.



China
Phone: +86-18627838895 | Email: sales@edatec.cn / support@edatec.cn
EDA Technology Co., LTD

Overseas
Phone:+86-18217351262 | Email: sales@edatec.cn / support@edatec.cn
www.edatec.cn

②Install **Raspberry Pi Active Cooler** on **Raspberry Pi 5**.

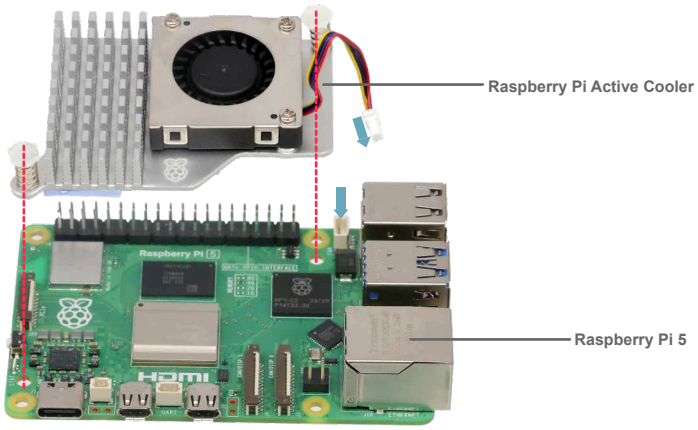

③Connect the 40-Pin connector to the 40-Pin port on **Raspberry Pi 5**.

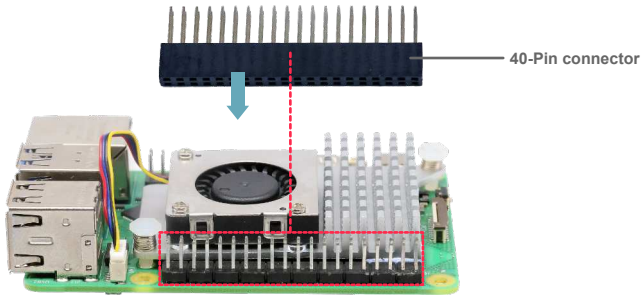

④Connect **Raspberry Pi M.2 HAT+** to **Raspberry Pi 5** via 40-Pin connector and plug in the PCIe cable into PCIe port of **Raspberry Pi 5**.

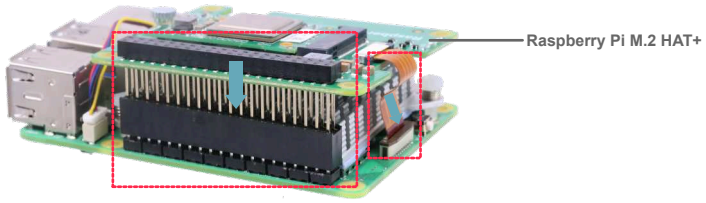

⑤Place the **Raspberry Pi 5** on the **ED-Pi5Case-EXT Bottom Cover** and align the screw holes.

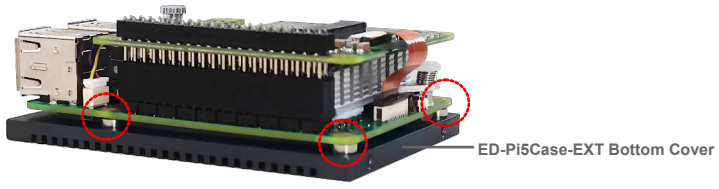

⑥Place four M2.5*H15 cylindrical sleeves on the screw holes between the **Raspberry Pi 5** and the **Raspberry Pi M.2 HAT+**. Then insert four M2.5*21 screws into the screw holes on the **Raspberry Pi M.2 HAT+** and tighten them clockwise using a screwdriver to secure the **Raspberry Pi M.2 HAT+** and **Raspberry Pi 5** to **ED-Pi5Case-EXT Bottom Cover**.

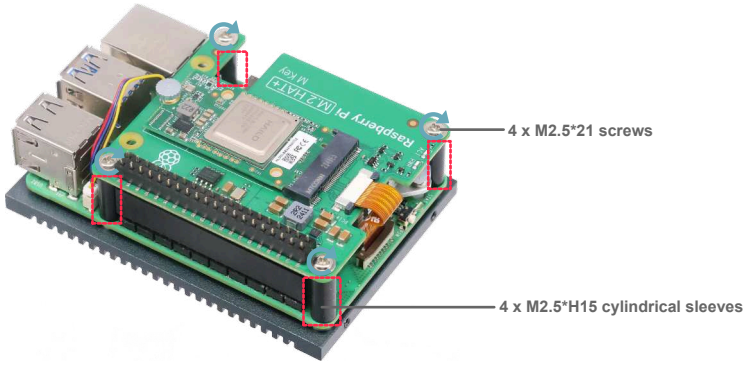

⑦Plug the FPC cable from the **Raspberry Pi Camera Module 3** into the CAM/DISP port on the **Raspberry Pi 5**.

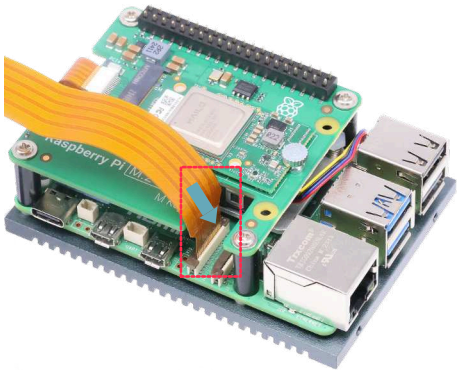

⑧Put **ED-Pi5Case-EXT Top Cover** over **ED-Pi5Case-EXT Bottom Cover**, and align the screw holes. Then insert four M2.5*4 screws and tighten them clockwise using a screwdriver.



⑨After the installation is complete, you can refer to the following figure to insert and remove the SD card.

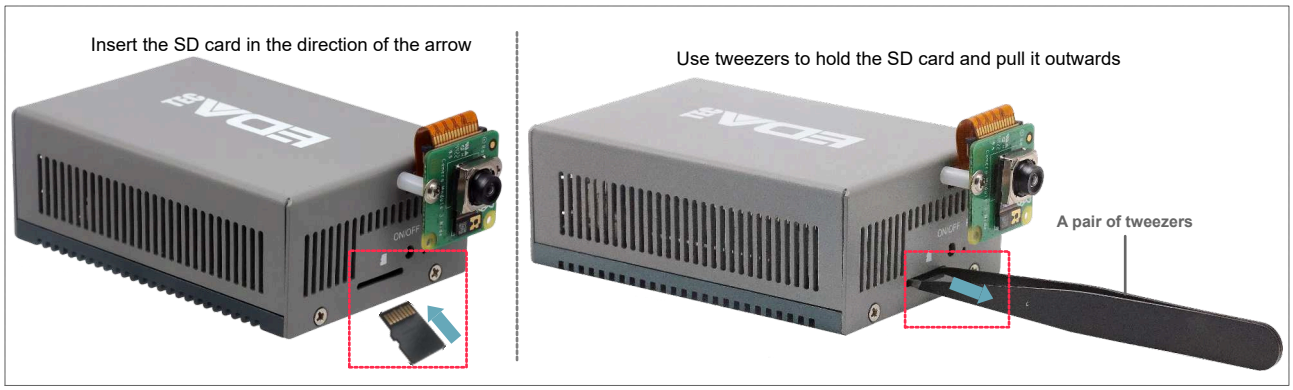

China
Phone: +86-18627838895 | Email: sales@edatec.cn / support@edatec.cn
EDA Technology Co., LTD

Overseas
Phone:+86-18217351262 | Email: sales@edatec.cn / support@edatec.cn
www.edatec.cn

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EDATEC:

ED-Pi5Case-EXT ED-Pi5Case-EXT