



**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

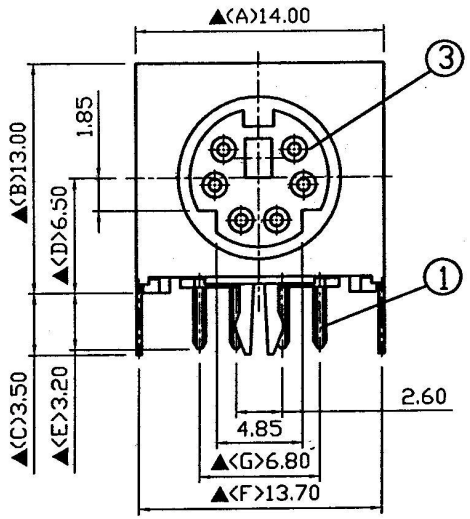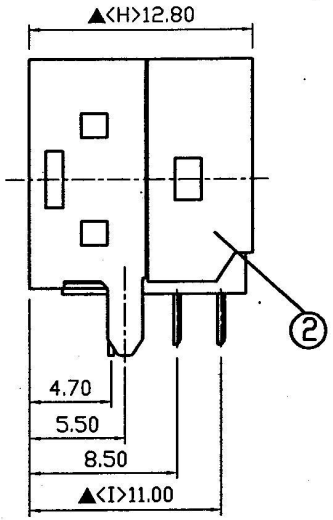


Arrangement of Contact




Pin Hole Layout
(Jack Bottom View)

| NO. | Description | Material | Q'TY | Finish |
|---|---|---|---|---|
| 4. | Cover | PBT UL 94 V-0 | 1 | Black Color |
| 3. | Housing | PBT UL 94 V-0 | 1 | Black Color |
| 2. | Metal Shell | 0.3T Brass | 1 | Nickel Plating |
| 1. | Terminal | 0.2T Phosphor Copper | 6 | Gold flash Plated Contact & Terminal Plated With Tin Over 50u"(Min) Nickel |
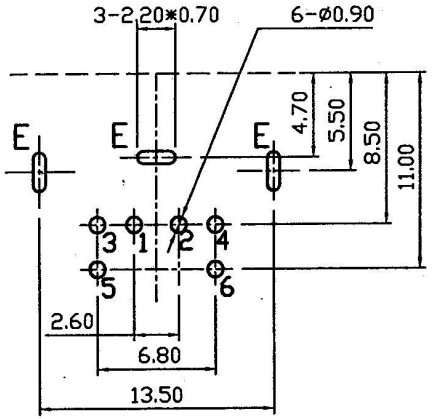
| DATE | DWN | CHKD | APVD | MANAGER |
|---|---|---|---|---|
| 08.15.2007 | 王一鳴 | | | |

| | | |
|---|---|---|
| PART NAME :MINI DIN JACK | PART NUMBER: | VERSION:5.0 |
| TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm | SCALE:1/1 |

RoHS Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

文管中心发行 2007-8-15