



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).



## Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) V=9V		Viewing Angle
			Min.	Typ.	2θ1/2
L-36BYD	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	5	10	60°

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

## Electrical / Optical Characteristics at T<sub>A</sub>=25°C


Symbol	Parameter	Device	Min	Typ	Units	Test Conditions
λ <sub>peak</sub>	Peak Wavelength	Yellow		590	nm	
λ <sub>D</sub>	Dominate Wavelength	Yellow		588	nm	
Δλ <sub>1/2</sub>	Spectral Line Half-width	Yellow		35	nm	
I <sub>F</sub>	Forward Current	Yellow	8	22	mA	Min :V <sub>F</sub> =3.5V Typ :V <sub>F</sub> =5V
I <sub>SON</sub>	Supply Current	Yellow		8	mA	V <sub>F</sub> =3.5V
I <sub>SON</sub>	Supply Current	Yellow		44	mA	V <sub>F</sub> =14V
f	Blink Frequency	Yellow		3	Hz	V <sub>F</sub> =3.5V
f	Blink Frequency	Yellow		1.5	Hz	V <sub>F</sub> =14V

## Absolute Maximum Ratings at T<sub>A</sub>=25°C

Parameter	Yellow	Units
Power dissipation	310	mW
Forward Voltage (max.)	14	V
Reverse Voltage	0.5	V
Operating Temperature	-40°C To +70°C	
Storage Temperature	-40°C To +85°C	
Lead Solder Temperature [1]	260°C For 5 Seconds	

Note:

1. 2mm below package base.

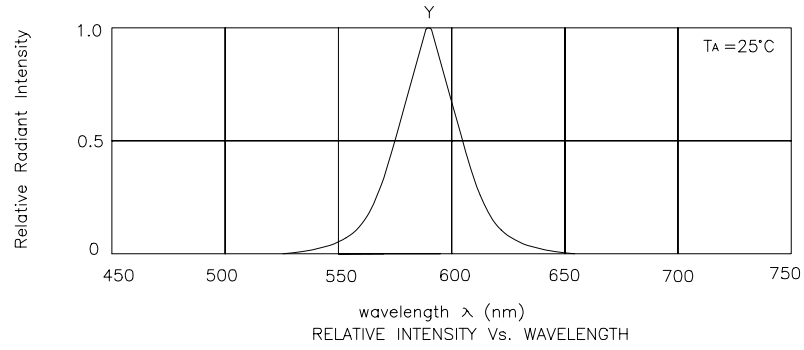

## Yellow L-36BYD

