EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

K 20.40 8 OHM

Art. No. 2941

Rectangular miniature speaker with high power handling and high efficiency. Thanks to its compact dimensions, suitable for signal output in machines and other equipment where space is at a premium.

Typical applications:
- Voice and signal output in machines and other equipment both indoors and outdoors.

Attributes:
- Plastic basket
- UV-resistant

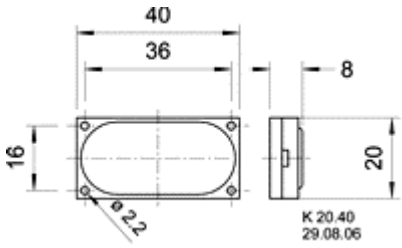

frequency- and impedance response

Technical Data:	
Nominal power handling with high pass	1 W (6 dB/Okt.; 300 Hz)
Peak power handling with high pass	2 W (6 dB/Okt.; 300 Hz)
Nominal impedance Z	8 Ohm
Frequency response	300–20000 Hz
Mean sound pressure level	76 dB (1 W/1 m)
Resonance frequency fs	600 Hz
Height of front pole-plate	1 mm
Voice coil diameter	12 mm
Cutout diameter	38 x 18 mm
Net weight	0,007 kg
Connections	2,8 x 0,3 mm (Lötöse/solder lug)
Heat resistance	−25 ... 60 °C