



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# K 20.40 8 OHM

Art. No. 2941

**Rectangular miniature speaker** with high power handling and high [efficiency](#). Thanks to its compact dimensions, suitable for signal output in machines and other equipment where space is at a premium.



## Typical

## applications:

- Voice and signal output in machines and other equipment both indoors and outdoors.

## Attributes:

- Plastic basket
- UV-resistant

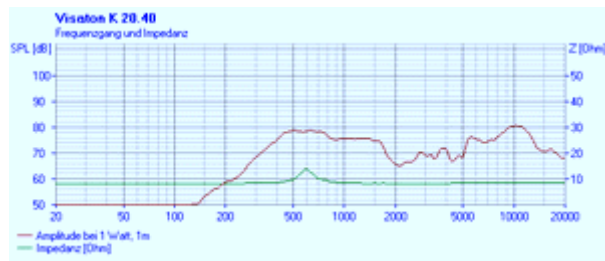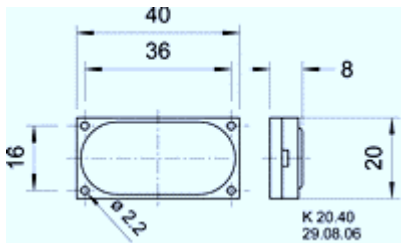

[frequency- and impedance response](#)

## Technical Data:

Nominal power handling with high pass	1 W (6 dB/Okt.; 300 Hz)
Peak power handling with high pass	2 W (6 dB/Okt.; 300 Hz)
Nominal impedance Z	8 Ohm
Frequency response	300–20000 Hz
Mean sound pressure level	76 dB (1 W/1 m)
Resonance frequency fs	600 Hz
Height of front pole-plate	1 mm
Voice coil diameter	12 mm
Cutout diameter	38 x 18 mm
Net weight	0,007 kg
Connections	2,8 x 0,3 mm (Lötöse/solder lug)
Heat resistance	-25 ... 60 °C